

OBSOLETE

SPECIFICATIONS:

MATERIAL:-

MOULDING: LCP, UL94V-0, WHITE

SHELL: BRASS

CONTACT: BRASS

FINISH:-

CONTACT: SELECTIVE GOLD

SHELL: NICKEL PLATED

ELECTRICAL:-

CURRENT RATING: 1.5A

VOLTAGE RATING: 30V AC/DC

DIELECTRIC WITHSTAND VOLTAGE: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30 mΩ MAX.

INSULATION RESISTANCE: 1000 MΩ MIN. AT 500V DC

ENVIRONMENTAL:-







TEMPERATURE RANGE: -55°C ~ +85°C

NOTES: ALL DIMENSIONS AND NOTES

MARKED * ARE CRITICAL AND

MUST BE CHECKED IN ACCORDANCE

WITH QUALITY DOC. QI-02A

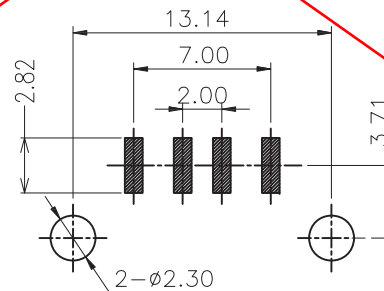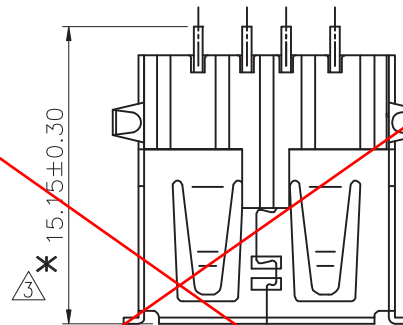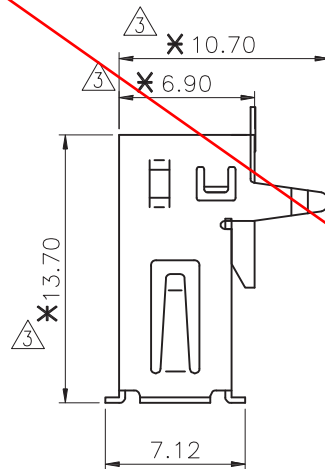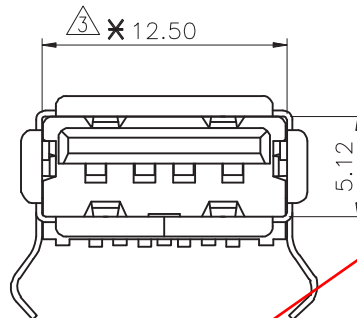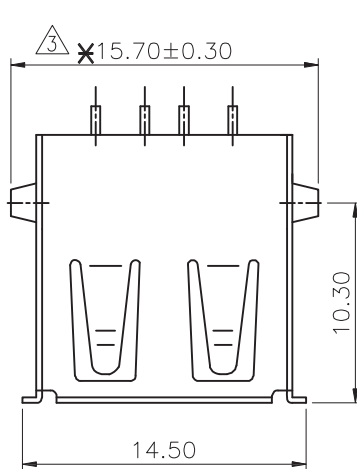

RECOMMENDED PCB LAYOUT

Allan	3	02.12.10	A340
Allan	2	24.08.10	A318
Allan	1	16.07.08	-

NAME	ISS.	DATE	C/NOTE
------	------	------	--------

APPROVED: 

CHECKED:

DRAWN: Allan

CUSTOMER REF.:

ASSEMBLY DRG:

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.38mm
X.XX = ±0.25mm
X.XXX = ±0.13mm

ANGLES = ±5°
UNLESS STATED

MATERIAL:

SEE NOTES

FINISH:

SEE NOTES

S/AREA:

mm²

TITLE:

USB A SERIES R/A SMD,
JACK

DRAWING NUMBER:

M701-2250442

SHT
1
OF
1