
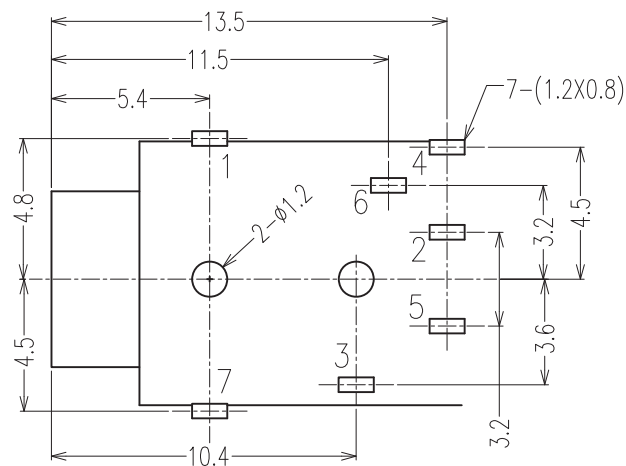


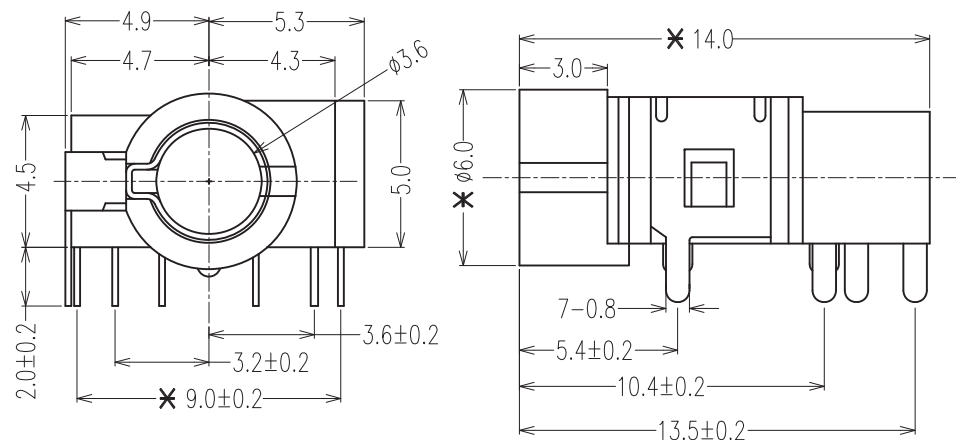

PCB LAYOUT (TOP VIEW)

TOLERANCES
X.X = $\pm 0.20\text{mm}$
X.XX = $\pm 0.10\text{mm}$

SPECIFICATIONS:

MATERIAL:-

- △ HOUSING: PBT, UL94V-0
TERMINAL: PHOSPHOR BRONZE

FINISH:-

- △ PIN 1: Au PLATED
PIN 2~7: SILVER PLATED

ELECTRICAL:-

CURRENT RATING: 1 AMP. MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC RMS
FOR 60 SECS


CONTACT RESISTANCE: 30 mΩ MAX.

INSULATION RESISTANCE: 100 MΩ MIN AT 500V DC

ENVIRONMENTAL:-

OPERATING TEMPERATURE: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$

NOTES: ALL DIMENSIONS AND NOTES
MARKED * ARE CRITICAL AND
MUST BE CHECKED IN ACCORDANCE
WITH QUALITY DOC. QI-02A

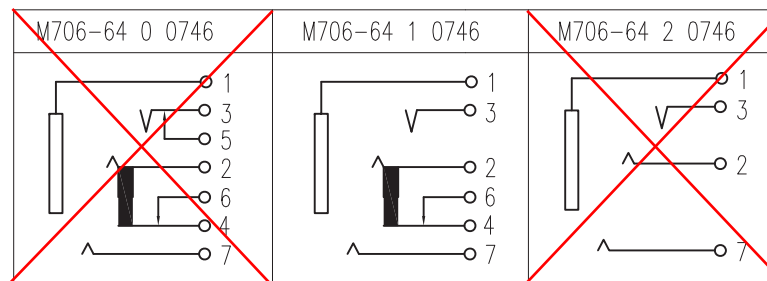

Allan	3	06.10.10	A328
Allan	2	05.10.09	A241
Allan	1	01.08.06	-

NAME	ISS.	DATE	C/NOTE
APPROVED: <i>Paul</i>			
CHECKED:			
DRAWN: Allan			
CUSTOMER REF.:			
ASSEMBLY DRG:			

ORDER CODE

M706-64 X 0746

REFER SCHEMATIC

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES
X. = $\pm 1\text{mm}$
X.X = $\pm 0.25\text{mm}$
X.XX = $\pm 0.10\text{mm}$
X.XXX = $\pm 0.01\text{mm}$

ANGLES = $\pm 5^{\circ}$
UNLESS STATED

MATERIAL:

SEE NOTES

FINISH:

SEE NOTES

S/AREA:

mm²

TITLE:

3.5mm EARPHONE JACK, PCB MOUNT
PLASTIC HOUSING WITHOUT BUSHING

DRAWING NUMBER:

M706-64 X 0746

SHT
1
OF
1