

Datasheet


2 way 2 stack terminal block 5.08mm

RS Stock 790-1183



Dimensions: (mm)

PCB Layout

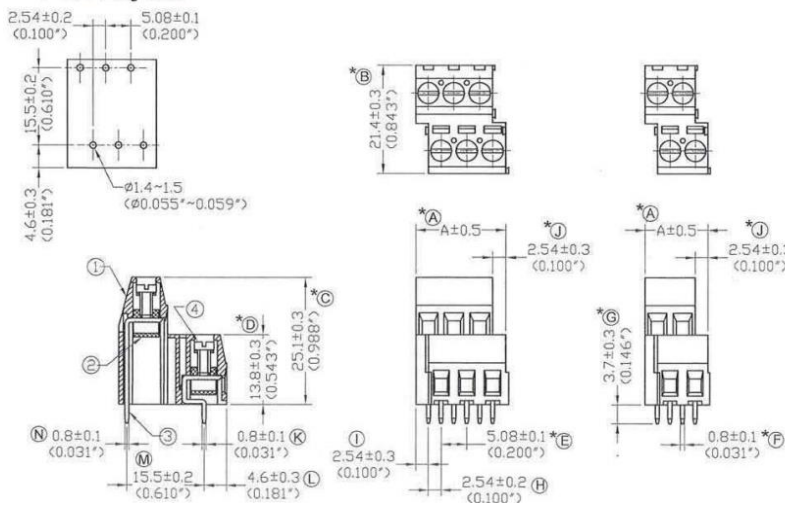

Specification

Current Rating: 16Amp AC300V
Insulation Withstands Volts: AC2000V Min
Insulation Resistance: >2000M Ω DC500V
Operation Temperature: -40°C to + 105°C
Wire Strip Length: 4mm~5mm
Wire Range: 12~26 AWG
Screw Torque: 5.0lb-inch

Material

Insulating Body: Polyamide 66(UL94V-0)
Screw: Steel / Finish: Zinc Plated
Terminal: Brass/ Tin Plated
Cage Clamp: Brass / Finished: Tin Plated
RoHS Compliant