

# 16-bit Proprietary Microcontroller

CMOS

## F<sup>2</sup>MC-16F MB90230 Series

### MB90233/234/P234/W234

#### ■ DESCRIPTION

The MB90230 series is a member of general-purpose, 16-bit microcontrollers designed for those applications which require high-speed realtimeprocessing, proving to be suitable for various industrial machines, camera and video devices, OA equipment, and for process control. The CPU used in this series is the F<sup>2</sup>MC\*-16F. The instruction set for the F<sup>2</sup>MC-16F CPU core is designed to be optimized for controller applications while inheriting the AT architecture of the F<sup>2</sup>MC-16/16H series, allowing a wide range of control tasks to be processed efficiently at high speed.

The peripheral resources integrated in the MB90230 series include: the UART (clock asynchronous/synchronous transfer) × 1 channel, the extended serial I/O interface × 1 channel, the A/D converter (8/10-bit precision) × 8 channels, the D/A converter (8-bit precision) × 2 channels, the level comparator × 1 channel, the external interrupt input × 4 lines, the 8-bit PPG timer (PWM/single-shot function) × 1 channel, the 8-bit PWM controller × 6 channels, the 16-bit free run timer × 1 channel, the input capture unit × 4 channels, the output compare unit × 6 channels, and the serial E<sup>2</sup>PROM interface.

\*: F<sup>2</sup>MC stands for FUJITSU Flexible Microcontroller.

#### ■ FEATURES


##### F<sup>2</sup>MC-16F CPU block

- Minimum execution time: 62.5 ns (at machine clock frequency of 16 MHz)
- Instruction set optimized for controllers  
Various data types supported (bit, byte, word, and long-word)  
Extended addressing modes: 23 types  
High coding efficiency  
Higher-precision operation enhanced by a 32-bit accumulator  
Signed multiplication and division instructions

(Continued)


#### ■ PACKAGE

100-pin Plastic LQFP



(FPT-100P-M05)

100-pin Ceramic LQFP

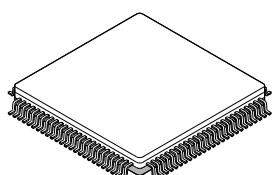

(FPT-100C-C01)

# MB90230 Series

*(Continued)*

- Enhanced instructions applicable to high-level language (C) and multitasking
  - System stack pointer
  - Enhanced pointer-indirect instructions
  - Barrel shift instructions
- Increased execution speed: 8-byte instruction queue
- 8-level, 32-factor powerful interrupt service functions
- Automatic transfer function independent of the CPU (EI<sup>2</sup>OS)
- General-purpose ports: Up to 84 lines
  - Ports with input pull-up resistor available: 24 lines
  - Ports with output open-drain available: 9 lines

## Peripheral blocks

- ROM: 48 Kbytes (MB90233)
  - 96 Kbytes (MB90234)
- EPROM: 96 Kbytes (MB90W234)
- One-time PROM: 96 Kbytes (MB90P234)
- RAM: 2 Kbytes (MB90233)
  - 3 Kbytes (MB90234/W234/P234)
- PWM control circuit: (simple 8 bits): 6 channels
- Serial interface
  - UART: 1 channel
  - Extended serial I/O interface
  - Switchable I/O port: 1 channel
  - Communication prescaler (Source clock generator for the UART, serial I/O interface, CKOT, and level comparator): 1 channel
- Serial E<sup>2</sup>PROM interface: 1 channel
- A/D converter with 8/10-bit resolution: input 8 channels
- Level comparator: 1 channel
  - 4-bit D/A converter integrated
- D/A converter with 8-bit resolution: 2 channels
  - 8-bit PPG timer: 1 channel
- Input/output timer
  - 16-bit free run timer: 1 channel
  - 16-bit output compare unit: 6 channels
  - 16-bit input capture unit: 4 channels
- 18-bit timebase timer
- Watchdog timer function
- Standby modes
  - Sleep mode
  - Stop mode


## ■ PRODUCT LINEUP

Parameter	Part number	MB90233	NB90234	MB90P234	MB90W234	MB90V230
Classification		Mask ROM products		One-time PROM model	EPROM model	Evaluation model
ROM size	48 Kbytes	96 Kbytes	96 Kbytes	96 Kbytes	96 Kbytes	—
RAM size	2 Kbytes	3 Kbytes	3 Kbytes	3 Kbytes	3 Kbytes	4 Kbytes
CPU functions		Number of instructions: 420 Instruction bit length: 8 or 16 bits Instruction length: 1 to 7 bytes Data bit length: 1, 4, 8, 16, or 32 bits Minimum execution time: 62.5 ns at 16 MHz (internal)				
Ports		Up to 84 lines I/O ports (CMOS): 51 I/O ports (CMOS) with pull-up resistor available: 24 I/O ports (open-drain): 9				
UART		Number of channels: 1 (switchable I/O) Clock synchronous communication (2404 to 38460 bps, full-duplex double buffering) Clock asynchronous communication (500K to 5M bps, full-duplex double buffering)				
Serial interface		Number of channels: 1 Internal or external clock mode Clock synchronous transfer (62.5 kHz to 1 MHz, "LSB first" or "MSB first" transfer)				
A/D converter		Resolution: 10 or 8 bits, Number of input lines: 4 Single conversion mode (conversion for a specified input channel) Scan conversion mode (continuous conversion for specified consecutive channels) Continuous conversion mode (repeated conversion for a specified channel) Stop conversion mode (periodical conversion)				
D/A converter		Resolution: 8 bits, Number of output pins: 2				
Level comparator		Comparison to internal D/A converter (4-bit resolution)				
PWM		Number of channels: 6 8-bit PWM control circuit (operation of 1×φ, 2×φ, 16×φ, 32×φ)				
PPG timer		Number of channels: 1 channel with 8-bit resolution PWM function: Continuous output of pulse synchronous to trigger Single-shot function: Output of single pulse by trigger				
Serial E <sup>2</sup> PROM interface		Number of channels: 1 Instruction code (NS type) Variable address length: 8 to 11 bits (with address increment function) Variable data length: 8 or 16 bits				
Timer		Number of channels: 6 16-bit reload timer operation (operation clock cycle of 0.25 µs to 1.05 s)				
Free run timer		Number of channels: 1 16-bit input capture unit: 4 channels 16-bit output compare unit: 6 channels				
External interrupt input		Number of input pins: 4				
Standby mode		Stop mode and sleep mode				
Package		FPT-100P-M05		FPT-100C-C01	PGA256-A02	

# MB90230 Series

## ■ PIN ASSIGNMENT

(TOP VIEW)

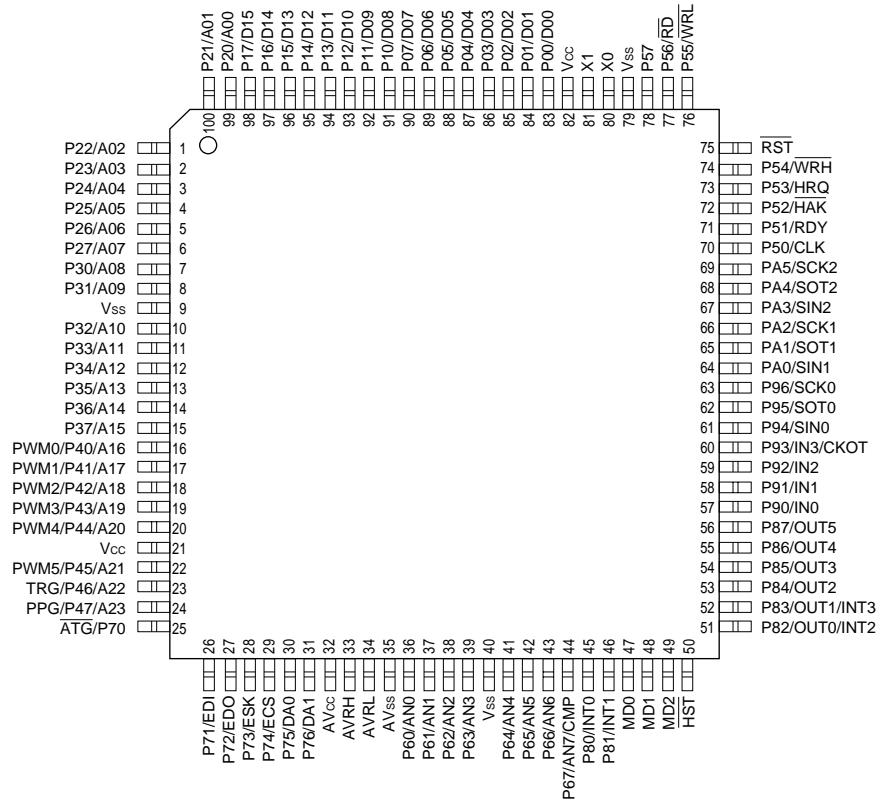

## ■ PIN DESCRIPTION

Pin no.	Pin name	Circuit type	Function
80	X0	A	Oscillator pins
81	X1		
82	V <sub>cc</sub>	—	Power supply pin
83 to 90	P00 to P07	G	General-purpose I/O port An input pull-up resistor can be added to the port by setting the pull-up resistor setting register. These pins serve as D00 to D07 pins in bus modes other than the single-chip mode.
	D00 to D07		I/O pins for the lower eight bits of the external data bus. These pins are enabled in an external-bus enabled mode.
91 to 98	P10 to P17	G	General-purpose I/O port An input pull-up resistor can be added to the port by setting the pull-up resistor setting register. These pins are enabled in the single-chip mode with the external-bus enabled and the 8-bit data bus specified.
	D08 to D15		I/O pins for the upper eight bits of the external data bus These pins are enabled in an external-bus enabled mode with the 16-bit data bus specified.
99, 100 1 to 6	P20 to P27	G	General-purpose I/O port An input pull-up resistor can be added to the port by setting the pull-up resistor setting register. These pins are enabled in the single-chip mode.
	A00 to A07		I/O pins for the lower eight bits of the external data bus These pins are enabled in an external-bus enabled mode.
7, 8	P30, P31	E	General-purpose I/O port This port is enabled in the single-chip mode or when the middle address control register setting is "port."
	A08, A09		I/O pins for the middle eight bits of the external data bus These pins are enabled in an external-bus enabled mode when the middle address control register setting is "address."
9	V <sub>ss</sub>	—	Power supply pin
10 to 15	P32 to P37	E	General-purpose I/O port This port is enabled in the single-chip mode or when the middle address control register setting is "port."
	A10 to A15		I/O pins for the middle eight bits of the external data bus These pins are enabled in an external-bus enabled mode when the middle address control register setting is "address."

(Continued)

# MB90230 Series

Pin no.	Pin name	Circuit type	Function
16	P40	E	General-purpose I/O port This port is enabled in the single-chip mode or when the upper address control register setting is "port."
	A16		Output pin for external address A16 This pin is enabled in the external-bus enabled mode with the upper address control register set to "address."
	PWM0		This pin serves as the output pin for 8-bit PWM0 The pin is enabled for output by the control status register.
17	P41	E	General-purpose I/O port This port is enabled in the single-chip mode or when the upper address control register setting is "port."
	A17		Output pin for external address A17 This pin is enabled in the external-bus enabled mode with the upper address control register set to "address."
	PWM1		This pin serves as the output pin for 8-bit PWM1. The pin is enabled for output by the control status register.
18	P42	E	General-purpose I/O port This port is enabled in the single-chip mode or when the upper address control register setting is "port."
	A18		Output pin for external address A18 This pin is enabled in the external-bus enabled mode with the upper address control register set to "address."
	PWM2		This pin serves as the output pin for 8-bit PWM2. This pin is enabled for output by the control status register.
19	P43	E	General-purpose I/O port This port is enabled in the single-chip mode or when the upper address control register setting is "port."
	A19		Output pin for external address A19 This pin is enabled in the external-bus enabled mode with the upper address control register set to "address."
	PWM3		This pin serves as the output pin for 8-bit PWM3. This pin is enabled for output by the control status register.
20	P44	E	General-purpose I/O port This port is enabled in the single-chip mode or when the upper address control register setting is "port."
	A20		Output pin for external address A20 This pin is enabled in the external-bus enabled mode with the upper address control register set to "address."
	PWM4		This pin serves as the output pin for 8-bit PWM4. The pin is enabled for output by the control status register.
21	V <sub>cc</sub>	—	Power supply pin

(Continued)

Pin no.	Pin name	Circuit type	Function
22	P45	E	General-purpose I/O port This port is enabled in the single-chip mode or when the upper address control register setting is "port."
	A21		Output pin for external address A21 This pin is enabled in the external-bus enabled mode with the upper address control register set to "address."
	PWM5		This pin serves as the output pin for 8-bit PWM5. The pin is enabled for output by the control status register.
23	P46	L <sup>*1</sup>	General-purpose I/O port This port is enabled in the single-chip mode or when the upper address control register setting is "port."
	A22		Output pin for external address A22 This pin is enabled in the external-bus enabled mode with the upper address control register set to "address."
	TRG		This pin serves as the external trigger pin for the 8-bit PPG timer The pin is enabled for triggering by the control status register.
24	P47	E	General-purpose I/O port This port is enabled in the single-chip mode or when the upper address control register setting is "port."
	A23		Output pin for external address A23 This pin is enabled in the external-bus enabled mode with the upper address control register set to "address."
	PPG		This pin serves as the output pin for the 8-bit PPG timer. The pin is enabled for output by the control status register.
25	P70	L <sup>*1</sup>	General-purpose I/O port
	ATG		External trigger input pin for the A/D converter This pin functions when enabled by the control status register.
26	P71	F	General-purpose I/O port
	EDI		Data input pin for the serial EEPROM interface This pin functions when enabled by the control status register.
27	P72	E	General-purpose I/O port
	EDO		Data output pin for the serial EEPROM interface This pin functions when enabled by the control status register.
28	P73	E	General-purpose I/O port
	ESK		Clock output pin for the serial EEPROM interface This pin functions when enabled by the control status register.
29	P74	E	General-purpose I/O port
	ECS		Chip select signal output pin for the serial EEPROM interface This pin functions when enabled by the control status register.

(Continued)

# MB90230 Series

Pin no.	Pin name	Circuit type	Function
30, 31	P75, P76	K	General-purpose I/O port
	DA0 DA1		This pin serves as the D/A converter output pin. The pin functions when enabled by the control status register.
32	AV <sub>cc</sub>	—	A/D converter power supply pin
33	AV <sub>RH</sub>	—	“H” reference power supply pin for the A/D converter
34	AV <sub>RL</sub>	—	“L” reference power supply pin for the A/D converter
35	AV <sub>ss</sub>	—	A/D converter power pin (GND)
36 to 39	P60 to P63	J	General-purpose I/O port This port is enabled when the analog input enable register setting is “port.”
	AN0 to AN3		A/D converter analog input pins These pins are enabled when the analog input enable register setting is “analog input.”
40	V <sub>ss</sub>	—	Power pin (GND)
41 to 43	P64 to P66	J	General-purpose I/O port This port is enabled when the analog input enable register setting is “port.”
	AN4 to AN6		A/D converter analog input pins These pins are enabled when the analog input enable register setting is “analog input.”
44	P67	J	General-purpose I/O port This port is enabled when the analog input enable register setting is “port.”
	AN7		A/D converter analog input pin This pin is enabled when the analog input enable register setting is “analog input.”
	CMP		Comparator input pin
45	P80	L <sup>*2</sup>	General-purpose I/O port This port is always enabled.
	INT0		External interrupt request input 0 Since this pin serves for interrupt request as required when external interrupt is enabled, other outputs must be off unless used intentionally.
46	P81	L <sup>*2</sup>	General-purpose I/O port This port is always enabled.
	INT1		External interrupt request input 1 Since this pin serves for interrupt request as required when external interrupt is enabled, other outputs must be off unless used intentionally.
47	MD0	C	Mode pin This pin must be fixed to V <sub>cc</sub> or V <sub>ss</sub> .
48	MD1	C	Mode pin This pin must be fixed to V <sub>cc</sub> or V <sub>ss</sub> .

(Continued)

Pin no.	Pin name	Circuit type	Function
49	MD2	C	Mode pin This pin must be fixed to V <sub>ss</sub> .
50	<u>HST</u>	D	Hardware standby input pin
51, 52	P82, P83	L <sup>*2</sup>	General-purpose I/O port
	OUT0, OUT1		Output compare output pins These pins function when enabled by the control status register.
	INT2, INT3		External interrupt request inputs 2 and 3. Since these pins serve for interrupt request as required when external interrupt is enabled, other outputs must be off unless used intentionally.
53 to 56	P84 to P87	E	General-purpose I/O port This pin is always enabled.
	OUT2 to OUT5		Output compare output pins These pins function when enabled by the control status register.
57 to 59	P90 to P92	L <sup>*1</sup>	General-purpose I/O port This port is always enabled.
	IN0 to IN2		Input capture edge input pins These pins function when enabled by the control status register.
60	P93	L <sup>*1</sup>	General-purpose I/O port This port is always enabled.
	IN3		Input capture edge input pin This pin functions when enabled by the control status register.
	CKOT		Prescaler output pin This pin functions when enabled by the control status register.
61	P94	I	General-purpose I/O port This port is always enabled. The port serves as an open-drain output depending on the open-drain setting register.
	SIN0		Serial data input pin for the UART This pin functions when enabled by the control status register.
62	P95	H	General-purpose I/O port This port is always enabled. The port serves as an open-drain output depending on the open-drain setting register.
	SOT0		Serial data output pin for the UART This pin functions when enabled by the control status register.
63	P96	I	General-purpose I/O port This port is always enabled. The port serves as an open-drain output depending on the open-drain setting register.
	SCK0		UART clock output pin This pin functions when enabled by the control status register.

(Continued)

# MB90230 Series

Pin no.	Pin name	Circuit type	Function
64	PA0	I	General-purpose I/O port This port is always enabled. The port serves as an open-drain output depending on the open-drain setting register.
	SIN1		Serial data input pin for the extended serial I/O interface This pin functions when enabled by the control status register and by the serial port switching register.
65	PA1	H	General-purpose I/O port This port is always enabled. The port serves as an open-drain output depending on the open-drain setting register.
	SOT1		Serial data output pin for the extended serial I/O interface This pin functions when enabled by the control status register and by the serial port switching register.
66	PA2	I	General-purpose I/O port This port is always enabled. The port serves as an open-drain output depending on the open-drain setting register.
	SCK1		Clock output pin for the extended serial I/O interface This pin functions when enabled by the control status register and by the serial port switching register.
67	PA3	I	General-purpose I/O port This port is always enabled. The port serves as an open-drain output depending on the open-drain setting register.
	SIN2		Serial data input pin for the extended serial I/O interface This pin functions when enabled by the control status register and by the serial port switching register.
68	PA4	H	General-purpose I/O port This port is always enabled. The port serves as an open-drain output depending on the open-drain setting register.
	SOT2		Serial data output pin for the extended serial I/O interface This pin functions when enabled by the control status register and by the serial port switching register.
69	PA5	I	General-purpose I/O port This port is always enabled. The port serves as an open-drain output depending on the open-drain setting register.
	SCK2		Clock output pin for the extended serial I/O interface This pin functions when enabled by the control status register and by the serial port switching register. The pin is a general-purpose I/O port.

(Continued)

(Continued)





Pin no.	Pin name	Circuit type	Function
70	P50	H	This pin is enabled in the single-chip mode and when the CLK output is disabled.
	CLK		CLK output pin This pin is enabled in an external-bus enabled mode with the CLK output enabled.
71	P51	F	General-purpose I/O port This port is enabled in the single-chip mode.
	RDY		Ready signal input pin This pin is enabled in an external-bus enabled mode.
72	P52	E	General-purpose I/O port This port is enabled in the single-chip mode or when the hold function is disabled.
	HAK		Hold acknowledge signal output pin This pin is enabled in the single-chip mode or when the hold function is enabled.
73	P53	E	General-purpose I/O port This port is enabled in the single-chip mode or when the hold function is disabled.
	HRQ		Hold acknowledge signal output pin This pin is enabled in the single-chip mode or when the hold function is enabled.
74	P54	E	General-purpose I/O port This port is enabled in the single-chip mode, in external-bus 8-bit mode, or when the WR pin output is disabled.
	WRH		Write strobe output pin for the upper eight bits of the data bus This pin is enabled in an external-bus enabled mode and in external bus 16-bit mode with the WR pin output enabled.
75	<u>RST</u>	B	Reset signal input pin
76	P55	E	This port is enabled in the single-chip mode, in external-bus 8-bit mode, or when the WR pin output is disabled
	<u>WRL</u>		Write strobe output pin for the lower eight bits of the data bus This pin is enabled in an external-bus enabled mode and in external bus 16-bit mode with the WR pin output enabled. The pin is a general-purpose I/O port.
77	P56	E	This pin is enabled in the single-chip mode.
	<u>RD</u>		Read strobe output pin for the data bus This pin is enabled in an external-bus enabled mode.
78	P57	E	General-purpose I/O port
79	V <sub>ss</sub>	—	Power pin (GND)

\*1: Enabled in any standby mode




\*2: Enabled only in the hardware standby mode

# MB90230 Series

## ■ I/O CIRCUIT TYPE

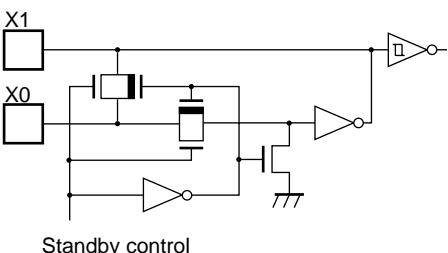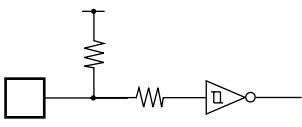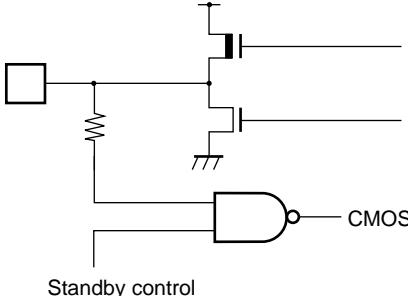Type	Circuit	Remarks
A	 <p>Standby control</p>	<ul style="list-style-type: none"> <li>• Oscillation feedback resistor: Approx. 1 MΩ</li> </ul>
B		<ul style="list-style-type: none"> <li>• Hysteresis input with pull-up resistor</li> </ul>
C		<ul style="list-style-type: none"> <li>• CMOS input port</li> </ul>
D		<ul style="list-style-type: none"> <li>• Hysteresis input port</li> </ul>
E	 <p>Standby control</p> <p>CMOS</p>	<ul style="list-style-type: none"> <li>• CMOS level output</li> </ul>





(Continued)

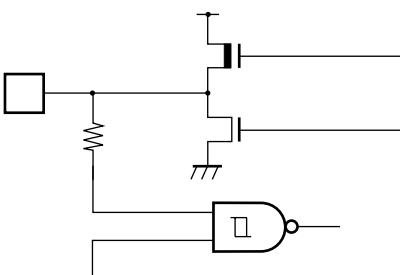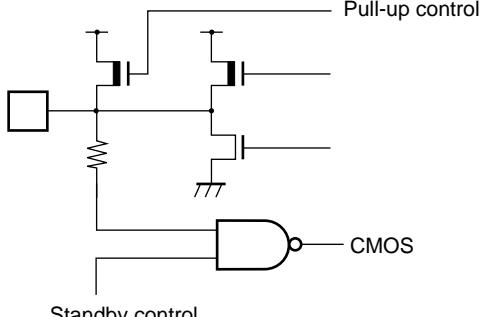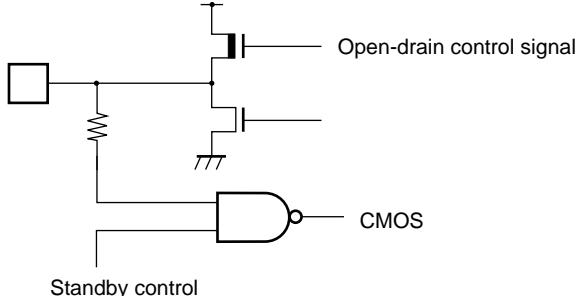Type	Circuit	Remarks
F	 <p>Standby control</p>	<ul style="list-style-type: none"> <li>CMOS level output</li> <li>Hysteresis input</li> </ul>
G	 <p>Pull-up control</p> <p>Standby control</p> <p>CMOS</p>	<ul style="list-style-type: none"> <li>Input pull-up resistor control provided</li> <li>CMOS level input/output</li> </ul>
H	 <p>Open-drain control signal</p> <p>Standby control</p> <p>CMOS</p>	<ul style="list-style-type: none"> <li>CMOS level input/output</li> <li>Open-drain control provided</li> </ul>

(Continued)

# MB90230 Series

(Continued)

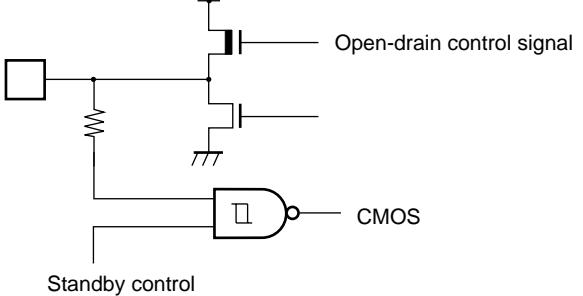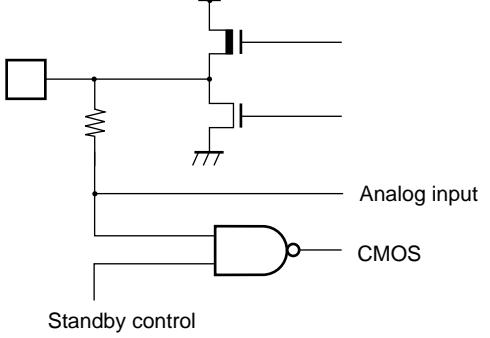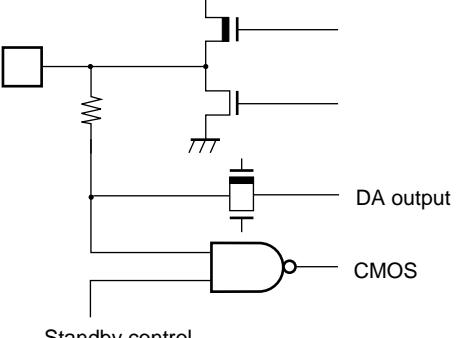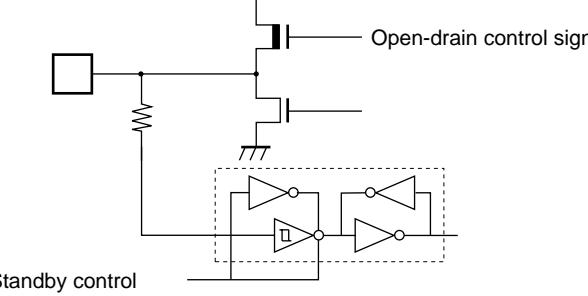Type	Circuit	Remarks
I	 <p>Open-drain control signal</p> <p>Standby control</p> <p>CMOS</p>	<ul style="list-style-type: none"> <li>CMOS level output</li> <li>Hysteresis input</li> <li>Open-drain control provided</li> </ul>
J	 <p>Analog input</p> <p>Standby control</p> <p>CMOS</p>	<ul style="list-style-type: none"> <li>CMOS level input/output</li> <li>Analog input</li> </ul>
K	 <p>DA output</p> <p>Standby control</p> <p>CMOS</p>	<ul style="list-style-type: none"> <li>CMOS level input/output</li> <li>Analog output</li> <li>Also serving for D/A output</li> </ul>
L	 <p>Open-drain control signal</p> <p>Standby control</p> <p>CMOS</p>	<ul style="list-style-type: none"> <li>CMOS level output</li> <li>Hysteresis input</li> <li>Open-drain control provided</li> </ul>

## ■ HANDLING DEVICES

### 1. Preventing Latchup

Latchup may occur on CMOS ICs if voltage higher than  $V_{CC}$  or lower than  $V_{SS}$  is applied to input and output pins other than medium- to high-voltage pins or if higher than the voltage which is shown on "1. Absolute Maximum Ratings" in section "■ Electrical Characteristics" is applied between  $V_{CC}$  and  $V_{SS}$ .

When latchup occurs, power supply current increases rapidly and might thermally damage elements. When using, take great care not to exceed the absolute maximum ratings.

Also, take care to prevent the analog power supply ( $AV_{CC}$  and  $AV_R$ ) and analog input from exceeding the digital power supply ( $V_{CC}$ ) when the analog system power supply is turned on and off.

### 2. Treatment of Unused Pins

Leaving unused input pins open could cause malfunctions. They should be connected to a pull-up or pull-down resistor.

### 3. External Reset Input

To reset the internal circuit by the Low-level input to the  $\overline{RST}$  pin, the Low-level input to the  $\overline{RST}$  pin must be maintained for at least five machine cycles. Pay attention to it if the chip uses external clock input.


### 4. $V_{CC}$ and $V_{SS}$ Pins

Apply equal potential to the  $V_{CC}$  and  $V_{SS}$  pins.

### 5. Notes on Using an External Clock

When using an external clock, drive the  $X_0$  pin as illustrated below:

#### Use of External Clock

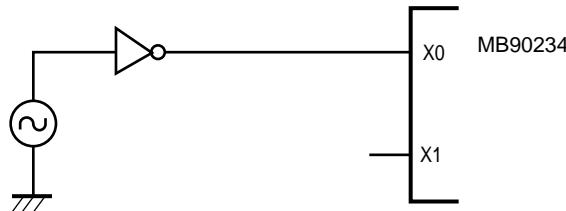

### 6. Power-on Sequence for A/D Converter Power Supplies and Analog Inputs

Be sure to turn on the digital power supply ( $V_{CC}$ ) before applying voltage to the A/D converter power supplies ( $AV_{CC}$ ,  $AV_{RH}$ , and  $AV_{RL}$ ) and analog inputs (AN0 to AN15).

When turning power supplies off, turn off the A/D converter power supplies ( $AV_{CC}$ ,  $AV_{RH}$ , and  $AV_{RL}$ ) and analog inputs (AN0 to AN15) first, then the digital power supply ( $AV_{CC}$ ).

When turning  $AV_{RH}$  on or off, be careful not to let it exceed  $AV_{CC}$ .

### 7. Pin set when turning on power supplies

When turning on power supplies, set the hardware standby input pin ( $\overline{HST}$ ) to "H".

# MB90230 Series

## 8. Program Mode

When shipped from Fujitsu, and after each erasure, all bits ( $96K \times 8$  bits) in the MB90W234 and MB90P234 are in the "1" state. Data is introduced by selectively programming "0's" into the desired bit locations. Bits cannot be set to 1 electrically.

## 9. Erasure Procedure

Data written in the MB90W234 is erased (from 0 to 1) by exposing the chip to ultraviolet rays with a wavelength of  $2,537\text{\AA}$  through the translucent cover.

Recommended irradiation dosage for exposure is  $10 \text{ Wsec/cm}^2$ . This amount is reached in 15 to 20 minutes with a commercial ultraviolet lamp positioned 2 to 3 cm above the package (when the package surface illuminance is  $1200 \mu\text{W/cm}^2$ ).

If the ultraviolet lamp has a filter, remove the filter before exposure. Attaching a mirrored plate to the lamp increases the illuminance by a factor of 1.4 to 1.8, thus shortening the required erasure time. If the translucent part of the package is stained with oil or adhesive, transmission of ultraviolet rays is degraded, resulting in a longer erasure time. In that case, clean the translucent part using alcohol (or other solvent not affecting the package).

The above recommended dosage is a value which takes the guard band into consideration and is a multiple of the time in which all bits can be evaluated to have been erased. Observe the recommended dosage for erasure; the purpose of the guard band is to ensure erasure in all temperature and supply voltage ranges. In addition, check the lifespan of the lamp and control the illuminance appropriately.


Data in the MB90W234 is erased by exposure to light with a wavelength of  $4000\text{\AA}$  or less.

Data in the device is also erased even by exposure to fluorescent lamp light or sunlight although the exposure results in a much lower erasure rate than exposure to  $2537\text{\AA}$  ultraviolet rays. Note that exposure to such lights for an extended period will therefore affect system reliability. If the chip is used where it is exposed to any light with a wavelength of  $4000\text{\AA}$  or less, cover the translucent part, for example, with a protective seal to prevent the chip from being exposed to the light.

Exposure to light with a wavelength of  $4,000$  to  $5,000\text{\AA}$  or more will not erase data in the device. If the light applied to the chip has a very high illuminance, however, the device may cause malfunction in the circuit for reasons of general semiconductor characteristics. Although the circuit will recover normal operation when exposure is stopped, the device requires proper countermeasures for use in a place exposed continuously to such light even though the wavelength is  $4,000\text{\AA}$  or more.

## 10. Recommended Screening Conditions

High-temperature aging is recommended for screening before packaging.

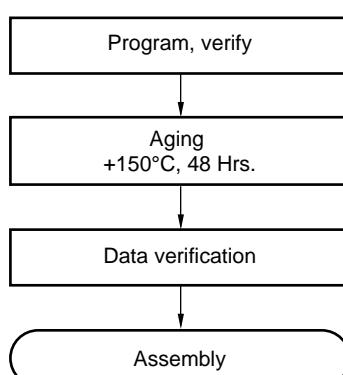


## 11. Write Yield


OTPROM products cannot be write-tested for all bits due to their nature. Therefore the write yield cannot always be guaranteed to be 100%.

# MB90230 Series

## ■ BLOCK DIAGRAM

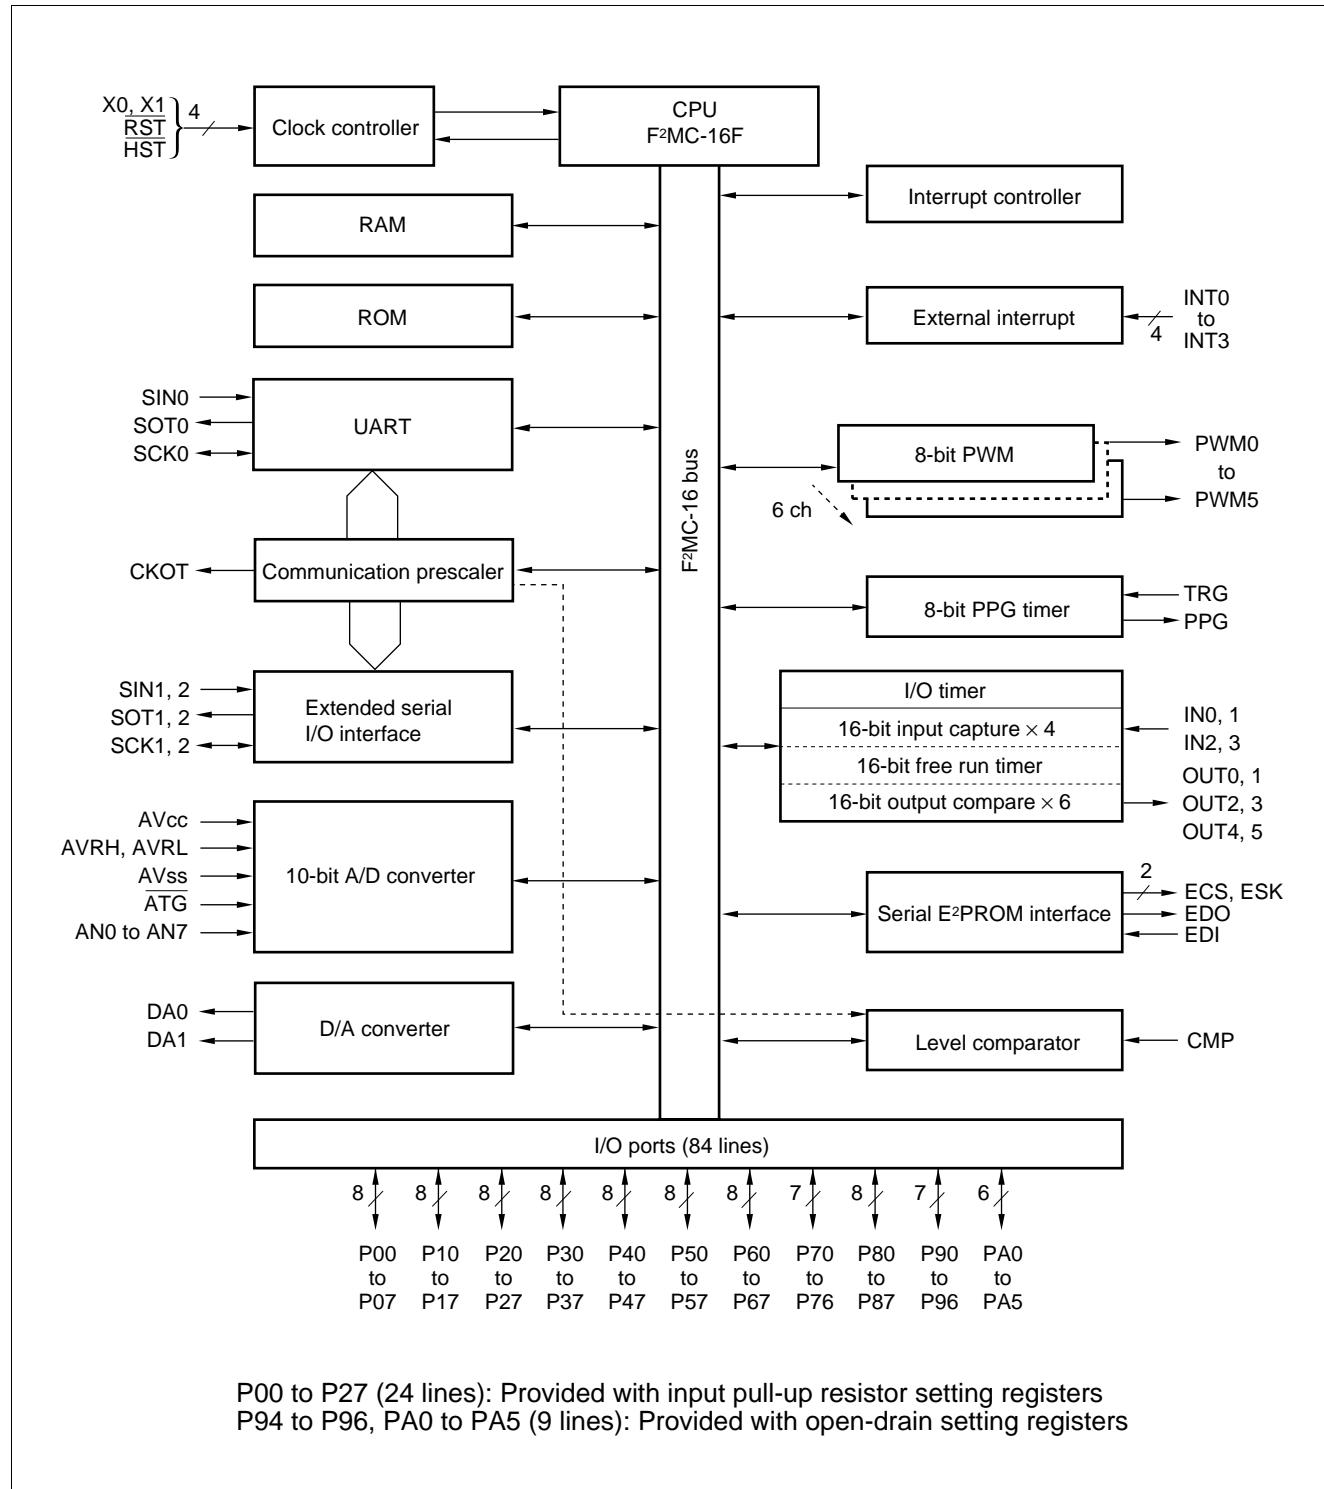

## ■ MEMORY MAP

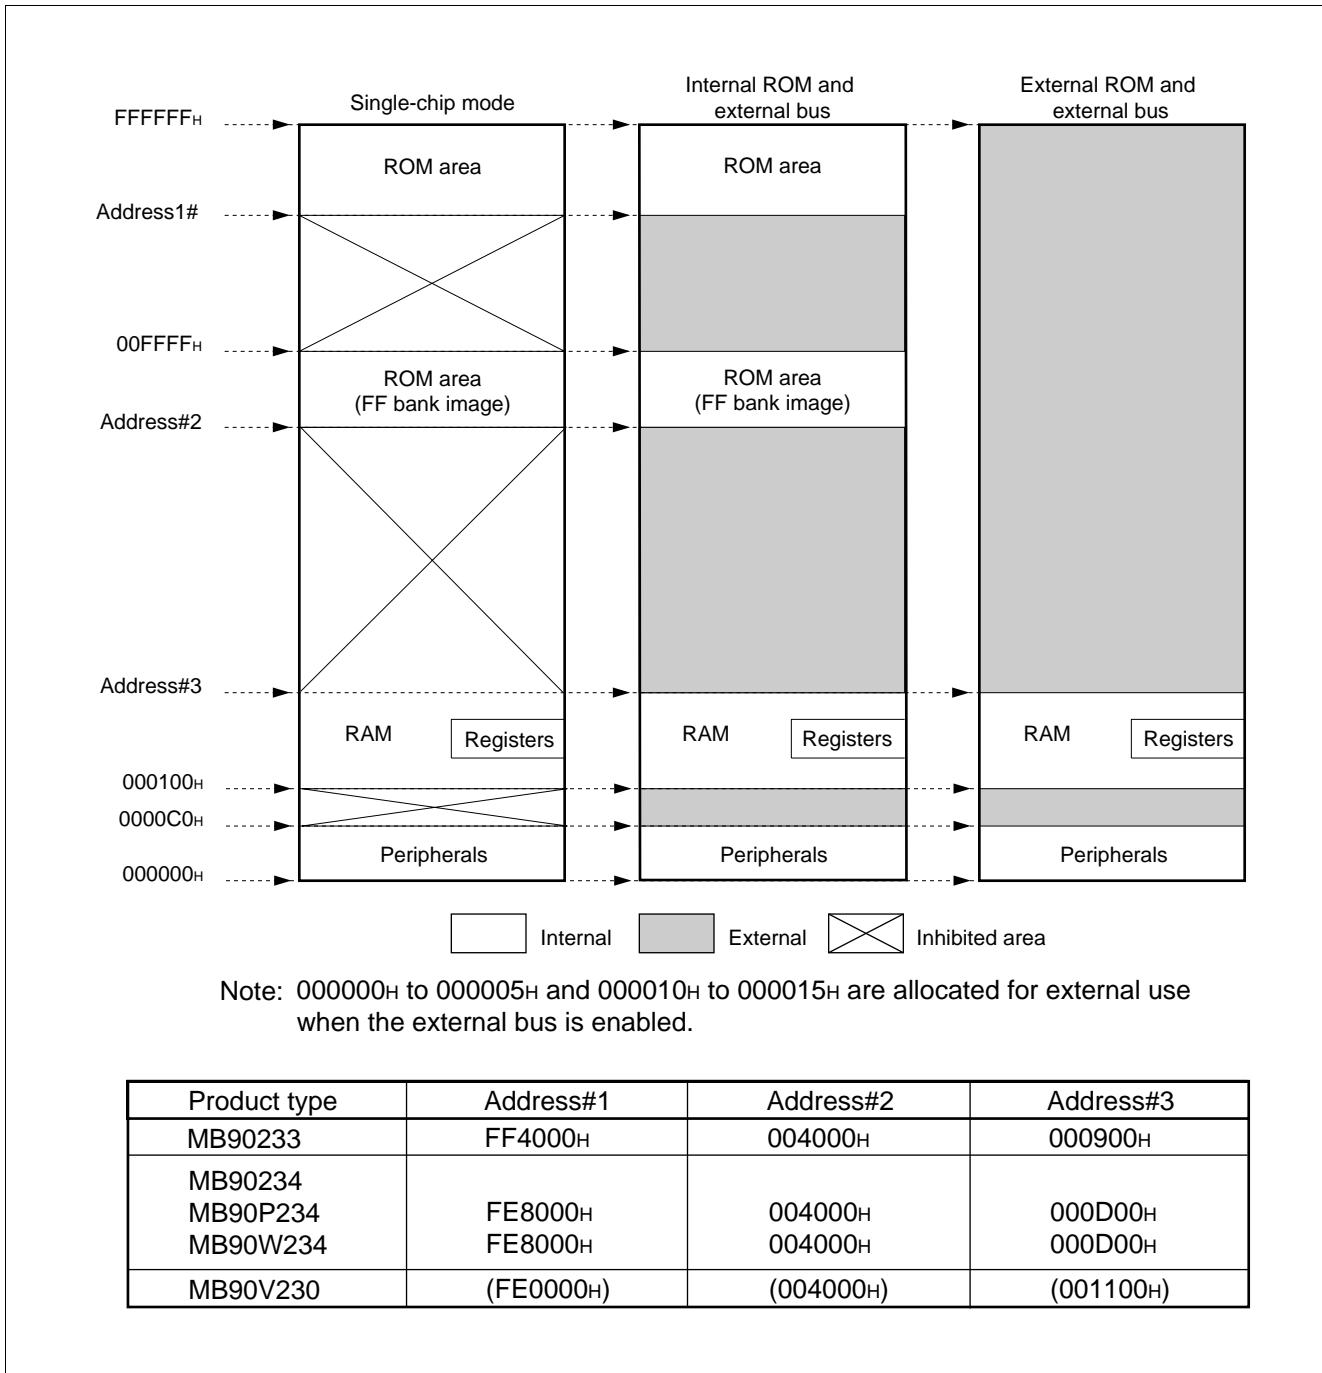

The MB90230 series can access the 00 bank to read ROM data written to the upper 48-KB locations in the FF bank. An advantage of reading written to data addresses FFFFFH-FF4000H from addresses 00FFFFH-004000H is that you can use the small model of a C compiler.

Note, however, that the products with more than 48KB ROM space (MB90V230, MB90P/W234, MB90234) cannot read data in addresses other than FFFFFH to FF4000H from the 00 bank.

# MB90230 Series

## ■ I/O MAP

Address	Register	Register name	Access	Resource name	Initial value
00H	Port 0 data register	PDR0	R/W	Port 0	XXXXXXXX
01H	Port 1 data register	PDR1	R/W	Port 1	XXXXXXXX
02H	Port 2 data register	PDR2	R/W	Port 2	XXXXXXXX
03H	Port 3 data register	PDR3	R/W	Port 3	XXXXXXXX
04H	Port 4 data register	PDR4	R/W	Port 4	XXXXXXXX
05H	Port 5 data register	PDR5	R/W	Port 5	XXXXXXXX
06H	Port 6 data register	PDR6	R/W	Port 6	XXXXXXXX
07H	Port 7 data register	PDR7	R/W	Port 7	-XXXXXXX
08H	Port 8 data register	PDR8	R/W	Port 8	XXXXXXXX
09H	Port 9 data register	PDR9	R/W	Port 9	-XXXXXXX
0AH	Port A data register	PDRA	R/W	Port A	--XXXXXX
10H	Port 0 direction register	DDR0	R/W	Port 0	00000000
11H	Port 1 direction register	DDR1	R/W	Port 1	00000000
12H	Port 2 direction register	DDR2	R/W	Port 2	00000000
13H	Port 3 direction register	DDR3	R/W	Port 3	00000000
14H	Port 4 direction register	DDR4	R/W	Port 4	00000000
15H	Port 5 direction register	DDR5	R/W	Port 5	00000000
16H	Port 6 direction register	DDR6	R/W	Port 6	00000000
17H	Port 7 direction register	DDR7	R/W	Port 7	-0000000
18H	Port 8 direction register	DDR8	R/W	Port 8	00000000
19H	Port 9 direction register	DDR9	R/W	Port 9	-0000000
1AH	Port A direction register	DDRA	R/W	Port A	--000000
1BH	Port 0 resistor register	RDR0	R/W	Port 0	00000000
1CH	Port 1 resistor register	RDR1	R/W	Port 1	00000000
1DH	Port 2 resistor register	RDR2	R/W	Port 2	00000000
1EH	Port 9 pin register	ODR9	R/W	Port 9	-000----
1FH	Port A pin register	ODRA	R/W	Port A	--000000
20H	Mode control register	UMC	R/W	UART	00000100
21H	Status register	USR	R/W		00010000
22H	Serial input register /Serial output register	UIDR /UODR	R/W		XXXXXXXX
23H	Rate and data register	URD	R/W		0000--00
24H	Serial mode control status register	SMCS	R/W	Extended serial I/O interface	---00000
25H					00000010

(Continued)

# MB90230 Series

Address	Register	Register name	Access	Resource name	Initial value	
26 <sub>H</sub>	Serial data register	SDR	R/W	Extended serial I/O interface	XXXXXXXX	
27 <sub>H</sub>	Reserved area	—	—	—	—	
28 <sub>H</sub>	Cycle setting register	PCSR	W	8-bit PPG timer	XXXXXXXX	
29 <sub>H</sub>	Duty factor setting register	PDUT	W		XXXXXXXX	
2A <sub>H</sub>	Control status register	PCNTL	R/W		00000000	
2B <sub>H</sub>		PCNTH			0000000-	
2C <sub>H</sub>	Reserved area	—	—	—	—	
2D <sub>H</sub>	Communication prescaler	CDCR	R/W	UART, CKOT, I/O, serial IF	0---1111	
2E <sub>H</sub>	Clock control register	CLKR	R/W	CKOT output	-----000	
2F <sub>H</sub>	Level comparator	LVLC	R/W	Level comparator	XXXX0000	
30 <sub>H</sub>	Interrupt/DTP enable register	ENIR	R/W	DTP/external interrupt	-----0000	
31 <sub>H</sub>	Interrupt/DTP factor register	EIRR	R/W		-----0000	
32 <sub>H</sub>	Request level setting register	ELVR	R/W		00000000	
33 <sub>H</sub>	Reserved area	—	—	—	—	
34 <sub>H</sub>	Analog input enable register	ADER	R/W	10-bit A/D converter	11111111	
35 <sub>H</sub>	Reserved area	—	—		—	
36 <sub>H</sub>	Control status data register	ADCS0	R/W		00000000	
37 <sub>H</sub>		ADCS1			00000000	
38 <sub>H</sub>	Data register	ADCR0	R		XXXXXXXX	
39 <sub>H</sub>		ADCR1			000000XX	
3A <sub>H</sub>	Reserved area	—	—	—	—	
3B <sub>H</sub>	Reserved area	—	—	—	—	
3C <sub>H</sub>	D/A converter data register 0	DAT0	R/W	8-bit D/A converter	XXXXXXXX	
3D <sub>H</sub>	D/A converter data register 1	DAT1	R/W		00000000	
3E <sub>H</sub>	D/A control register	DACR	R/W		-----00	
3F <sub>H</sub>	Reserved area	—	—	—	—	
40 <sub>H</sub>	PWM data register 0	PWD0	R/W	8-bit PWM0, 1	00000000	
41 <sub>H</sub>	PWM data register 1	PWD1	R/W		00000000	
42 <sub>H</sub>	Control status data register 0, 1	PWC01	R/W		00000000	
43 <sub>H</sub>	Reserved area	—	—	—	—	
44 <sub>H</sub>	PWM data register 2	PWD2	R/W	8-bit PWM2, 3	00000000	
45 <sub>H</sub>	PWM data register 3	PWD3	R/W		00000000	
46 <sub>H</sub>	Control status register 2, 3	PWC23	R/W		00000000	

(Continued)

# MB90230 Series

Address	Register	Register name	Access	Resource name	Initial value	
47 <sub>H</sub>	Reserved area	—	—	—	—	
48 <sub>H</sub>	PWM data register 4	PWD4	R/W	8-bit PWM4, 5	0 0 0 0 0 0 0 0	
49 <sub>H</sub>	PWM data register 5	PWD5	R/W		0 0 0 0 0 0 0 0	
4A <sub>H</sub>	Control status register 4, 5	PWC45	R/W		0 0 0 0 0 0 0 0	
4B <sub>H</sub>	Reserved area	—	—	—	—	
4C <sub>H</sub>	Data register	TCDT	R	16-bit free run timer	0 0 0 0 0 0 0 0	
4D <sub>H</sub>					0 0 0 0 0 0 0 0	
4E <sub>H</sub>	Control status register	TCCS	R/W		0 0 0 0 0 0 0 0	
4F <sub>H</sub>	Reserved area	—	—	—	—	
50 <sub>H</sub>	Compare register 0	OCP0	R/W	Output compare 0, 1	XXXXXXX	
51 <sub>H</sub>					XXXXXXX	
52 <sub>H</sub>	Compare register 1	OCP1	R/W		XXXXXXX	
53 <sub>H</sub>					XXXXXXX	
54 <sub>H</sub>	Control status register 0, 1	CS00	R/W		0 0 0 0 -- 0 0	
55 <sub>H</sub>		CS01			--- 0 0 0 0 0	
56 <sub>H</sub>	Reserved area	—	—	—	—	
57 <sub>H</sub>	Reserved area	—	—	—	—	
58 <sub>H</sub>	Compare register 2	OCP2	R/W	Output compare 2, 3	XXXXXXX	
59 <sub>H</sub>					XXXXXXX	
5A <sub>H</sub>	Compare register 3	OCP3	R/W		XXXXXXX	
5B <sub>H</sub>					XXXXXXX	
5C <sub>H</sub>	Control status register 2, 3	CS10	R/W		0 0 0 0 -- 0 0	
5D <sub>H</sub>		CS11			--- 0 0 0 0 0	
5E <sub>H</sub>	Reserved area	—	—	—	—	
5F <sub>H</sub>	Reserved area	—	—	—	—	
60 <sub>H</sub>	Compare register 4	OCP4	R/W	Output compare 4, 5	XXXXXXX	
61 <sub>H</sub>					XXXXXXX	
62 <sub>H</sub>	Compare register 5	OCP5	R/W		XXXXXXX	
63 <sub>H</sub>					XXXXXXX	
64 <sub>H</sub>	Control status register 4, 5	CS20	R/W		0 0 0 0 -- 0 0	
65 <sub>H</sub>		CS21			--- 0 0 0 0 0	
66 <sub>H</sub>	Reserved area	—	—	—	—	
67 <sub>H</sub> to 6F <sub>H</sub>	Reserved area	—	—	—	—	

(Continued)

# MB90230 Series

Address	Register	Register name	Access	Resource name	Initial value	
70 <sub>H</sub>	Capture register 0	ICP0	R/W	Input capture 0, 1	XXXXXXX	
71 <sub>H</sub>					XXXXXXX	
72 <sub>H</sub>	Capture register 1	ICP1	R/W		XXXXXXX	
73 <sub>H</sub>					XXXXXXX	
74 <sub>H</sub>	Control status register 0, 1	ICS0	R/W		00000000	
75 <sub>H</sub> to 77 <sub>H</sub>	Reserved area	—	—	—	—	
78 <sub>H</sub>	Capture register 2	ICP2	R/W	Input capture 2, 3	XXXXXXX	
79 <sub>H</sub>					XXXXXXX	
7A <sub>H</sub>	Capture register 3	ICP3	R/W		XXXXXXX	
7B <sub>H</sub>					XXXXXXX	
7C <sub>H</sub>	Control status register 2, 3	ICS1	R/W		00000000	
7D <sub>H</sub> to 7F <sub>H</sub>	Reserved area	—	—	—	—	
80 <sub>H</sub>	OP code register	EOPC	R/W	Serial E <sup>2</sup> PROM interface	----0000	
81 <sub>H</sub>	Format status register	ECTS	R/W		00000000	
82 <sub>H</sub>	Data register	EDAT	R/W		XXXXXXX	
83 <sub>H</sub>					XXXXXXX	
84 <sub>H</sub>	Address register	EADR	R/W		00000000	
85 <sub>H</sub>					00---000	
86 <sub>H</sub> to 8F <sub>H</sub>	Reserved area	—	—	—	—	
90 <sub>H</sub> to 9E <sub>H</sub>	System reserved area	—	*1	—	—	
9F <sub>H</sub>	Delayed interrupt source generate/release register	DIRR	R/W	Delayed interrupt generation module	-----0	
A0 <sub>H</sub>	Standby control register	STBYC	R/W	Low-power consumption mode	0001XXXX	
A1 <sub>H</sub>	Reserved area	—	—	—	—	
A2 <sub>H</sub>	Reserved area	—	—	—	—	
A3 <sub>H</sub>	Middle address control register	MACR	W	External pin	*2	
A4 <sub>H</sub>	Upper address control register	HACR	W	External pin	*2	
A5 <sub>H</sub>	External pin control register	EPCR	W	External pin	*2	
A6 <sub>H</sub>	Reserved area	—	—	—	—	
A7 <sub>H</sub>	Reserved area	—	—	—	—	
A8 <sub>H</sub>	Watchdog timer control register	TWC	R/W	Watchdog timer/reset	XXXXXXX	

(Continued)

# MB90230 Series

Address	Register	Register name	Access	Resource name	Initial value
A9 <sub>H</sub>	Timebase timer control register	TBTC	R/W	Timebase timer	----00000
AA <sub>H</sub> to AF <sub>H</sub>	Reserved area	—	—	—	—
B0 <sub>H</sub>	Interrupt control register 00	ICR00	R/W	Interrupt controller	00000111
B1 <sub>H</sub>	Interrupt control register 01	ICR01	R/W		00000111
B2 <sub>H</sub>	Interrupt control register 02	ICR02	R/W		00000111
B3 <sub>H</sub>	Interrupt control register 03	ICR03	R/W		00000111
B4 <sub>H</sub>	Interrupt control register 04	ICR04	R/W		00000111
B5 <sub>H</sub>	Interrupt control register 05	ICR05	R/W		00000111
B6 <sub>H</sub>	Interrupt control register 06	ICR06	R/W		00000111
B7 <sub>H</sub>	Interrupt control register 07	ICR07	R/W		00000111
B8 <sub>H</sub>	Interrupt control register 08	ICR08	R/W		00000111
B9 <sub>H</sub>	Interrupt control register 09	ICR09	R/W		00000111
BA <sub>H</sub>	Interrupt control register 10	ICR10	R/W		00000111
BB <sub>H</sub>	Interrupt control register 11	ICR11	R/W		00000111
BC <sub>H</sub>	Interrupt control register 12	ICR12	R/W		00000111
BD <sub>H</sub>	Interrupt control register 13	ICR13	R/W		00000111
BE <sub>H</sub>	Interrupt control register 14	ICR14	R/W		00000111
BF <sub>H</sub>	Interrupt control register 15	ICR15	R/W		00000111
C0 <sub>H</sub> to FF <sub>H</sub>	External area	—	—	—	*3

## Initial values

0: The initial value for the bit is "0."

1: The initial value for the bit is "1."

X: The initial value for the bit is undefined.

—: The bit is not used; the initial value is undefined.

\*1: Access inhibited

\*2: The initial value depends on each bus mode.

\*3: Only this area can be used as the external access area in the area that follows address 0000FF<sub>H</sub>. Access to any address in reserved areas specified in the I/O map table is handled as access to an internal area. An access signal to the external bus is not generated.

## ■ INTERRUPT VECTORS AND INTERRUPT CONTROL REGISTERS FOR INTERRUPT SOURCES

Interrupt source	I <sup>2</sup> OS support	Interrupt vector			Interrupt control register	
		No.	Address	ICR	Address	
Reset	×	#08	08 <sub>H</sub>	FFFFDCH	—	—
INT9 instruction	×	#09	09 <sub>H</sub>	FFFFD8 <sub>H</sub>	—	—
Exceptional	×	#10	0A <sub>H</sub>	FFFFD4 <sub>H</sub>	—	—
External interrupt (INT0) 0 ch	○	#11	0B <sub>H</sub>	FFFFD0 <sub>H</sub>	ICR00	0000B0 <sub>H</sub>
External interrupt (INT1) 1 ch	○	#12	0C <sub>H</sub>	FFFFCCH		
External interrupt (INT2) 2 ch	○	#13	0D <sub>H</sub>	FFFFC8 <sub>H</sub>	ICR01	0000B1 <sub>H</sub>
External interrupt (INT3) 3 ch	○	#14	0E <sub>H</sub>	FFFFC4 <sub>H</sub>		
Extended serial I/O interface	○	#15	0F <sub>H</sub>	FFFFC0 <sub>H</sub>	ICR02	0000B2 <sub>H</sub>
Serial E <sup>2</sup> PROM interface	○	#17	11 <sub>H</sub>	FFFFB8 <sub>H</sub>	ICR03	0000B3 <sub>H</sub>
Input capture channel 0	○	#19	13 <sub>H</sub>	FFFFB0 <sub>H</sub>	ICR04	0000B4 <sub>H</sub>
Input capture channel 1	○	#21	15 <sub>H</sub>	FFFFA8 <sub>H</sub>	ICR05	0000B5 <sub>H</sub>
Input capture channel 2	○	#23	17 <sub>H</sub>	FFFFA0 <sub>H</sub>	ICR06	0000B6 <sub>H</sub>
Input capture channel 3	○	#24	18 <sub>H</sub>	FFFF9C <sub>H</sub>		
Output compare channel 0	○	#25	19 <sub>H</sub>	FFFF98 <sub>H</sub>	ICR07	0000B7 <sub>H</sub>
Output compare channel 1	○	#26	1A <sub>H</sub>	FFFF94 <sub>H</sub>		
Output compare channel 2	○	#27	1B <sub>H</sub>	FFFF90 <sub>H</sub>	ICR08	0000B8 <sub>H</sub>
Output compare channel 3	○	#28	1C <sub>H</sub>	FFFF8C <sub>H</sub>		
Output compare channel 4	○	#29	1D <sub>H</sub>	FFFF88 <sub>H</sub>	ICR09	0000B9 <sub>H</sub>
Output compare channel 5	○	#30	1E <sub>H</sub>	FFFF84 <sub>H</sub>		
16-bit free run timer overflow	○	#31	1F <sub>H</sub>	FFFF80 <sub>H</sub>	ICR10	0000BA <sub>H</sub>
Timebase timer overflow	○	#32	20 <sub>H</sub>	FFFF7C <sub>H</sub>		
8-bit PPG timer	○	#33	21 <sub>H</sub>	FFFF78 <sub>H</sub>	ICR11	0000BB <sub>H</sub>
Level comparator	○	#34	22 <sub>H</sub>	FFFF74 <sub>H</sub>		
UART reception	○	#35	23 <sub>H</sub>	FFFF70 <sub>H</sub>	ICR12	0000BC <sub>H</sub>
UART transmission	○	#37	25 <sub>H</sub>	FFFF68 <sub>H</sub>	ICR13	0000BD <sub>H</sub>
End of A/D conversion	○	#39	27 <sub>H</sub>	FFFF60 <sub>H</sub>	ICR14	0000BE <sub>H</sub>
Delayed interrupt	×	#42	2A <sub>H</sub>	FFFF54 <sub>H</sub>	ICR15	0000BF <sub>H</sub>
Stack fault	×	#256	FF <sub>H</sub>	FFFC00 <sub>H</sub>	—	—

○: The request flag is cleared by the EI<sup>2</sup>OS interrupt clear signal.

○: The request flag is cleared by the EI<sup>2</sup>OS interrupt clear signal. The stop request is available.


×: The request flag is not cleared by the EI<sup>2</sup>OS interrupt clear signal.

## ■ PERIPHERAL RESOURCES


### 1. I/O Ports

Each pin in each port can be specified for input or output by setting the direction register when the corresponding peripheral resource is not set to use that pin. When the data register is read, the value depending on the pin level is read whenever the pin serves for input. When the data register is read with the pin serving for output, the latch value of the data register is read. This also applies to read operation by the read modify write instruction.


- General-purpose I/O port

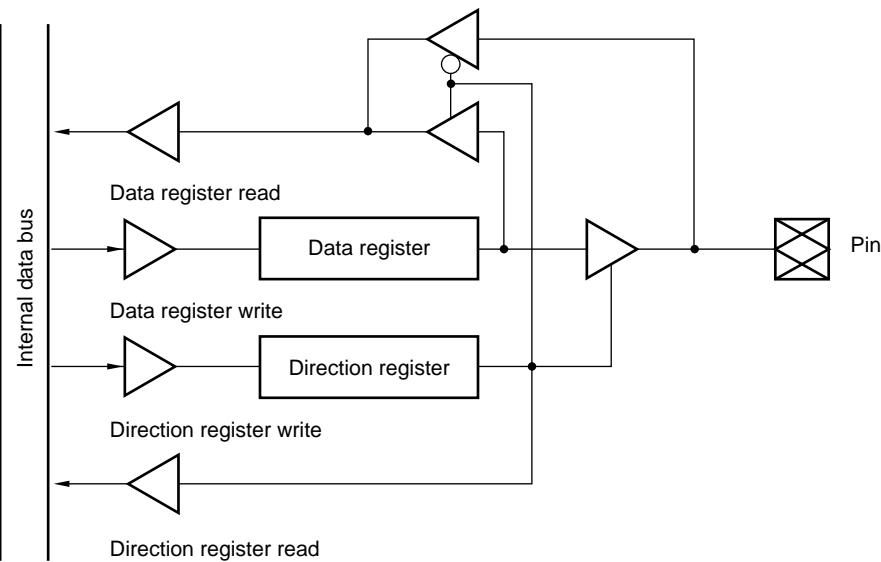

- Port with pull-up resistor setting register

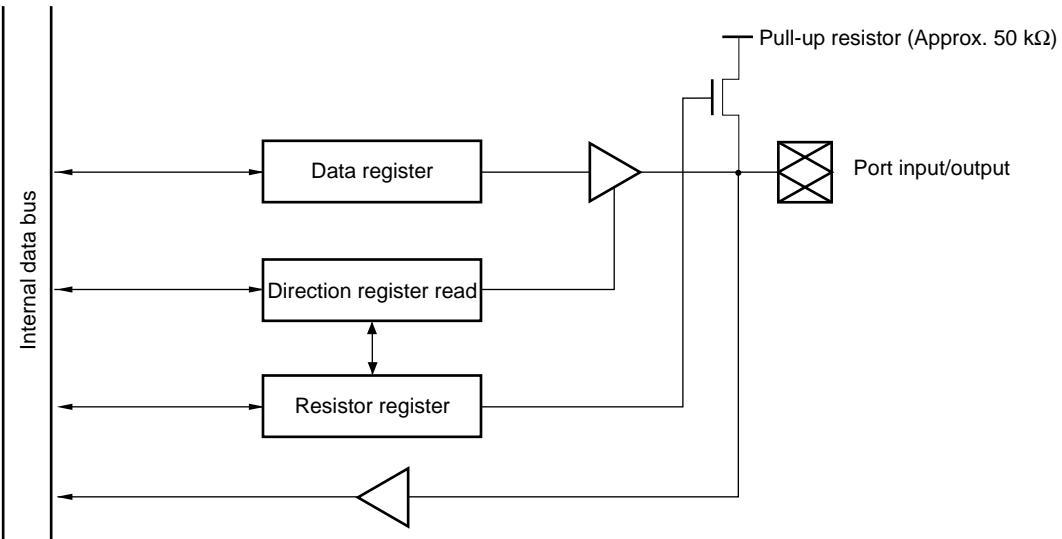

- Port with open-drain setting register

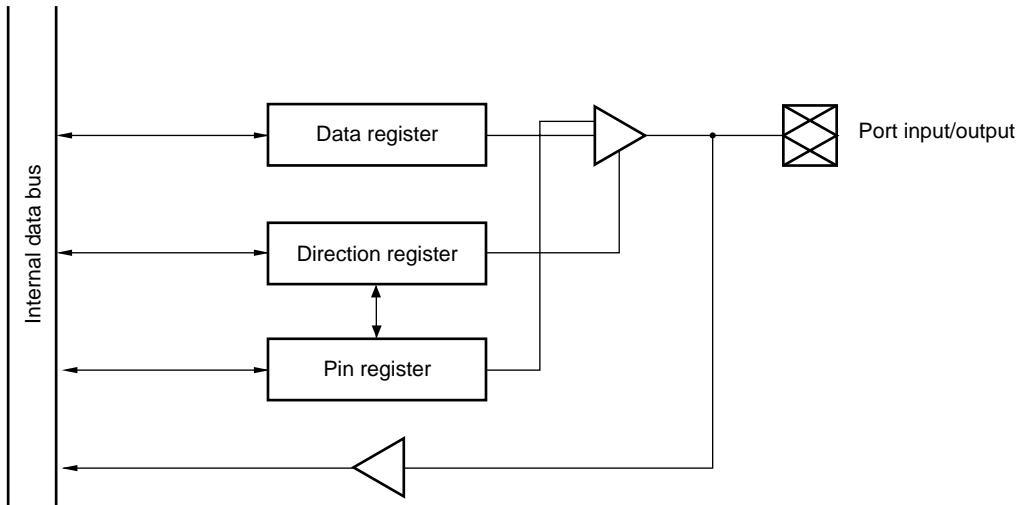

# MB90230 Series

## (1) Register Configuration

bit	15/7	14/6	13/5	12/4	11/3	10/2	9/1	8/0	
Address: 000000H	P07	P06	P05	P04	P03	P02	P01	P00	Port 0 data register (PDR0)
Address: 000001H	P17	P16	P15	P14	P13	P12	P11	P10	Port 1 data register (PDR1)
Address: 000002H	P27	P26	P25	P24	P23	P22	P21	P20	Port 2 data register (PDR2)
Address: 000003H	P37	P36	P35	P34	P33	P32	P31	P30	Port 3 data register (PDR3)
Address: 000004H	P47	P46	P45	P44	P43	P42	P41	P40	Port 4 data register (PDR4)
Address: 000005H	P57	P56	P55	P54	P53	P52	P51	P50	Port 5 data register (PDR5)
Address: 000006H	P67	P66	P65	P64	P63	P62	P61	P60	Port 6 data register (PDR6)
Address: 000007H	—	P76	P75	P74	P73	P72	P71	P70	Port 7 data register (PDR7)
Address: 000008H	P87	P86	P85	P84	P83	P82	P81	P80	Port 8 data register (PDR8)
Address: 000009H	—	P96	P95	P94	P93	P92	P91	P90	Port 9 data register (PDR9)
Address: 00000AH	—	—	PA5	PA4	PA3	PA2	PA1	PA0	Port A data register (PDRA)
bit	15/7	14/6	13/5	12/4	11/3	10/2	9/1	8/0	
Address: 000010H	P07	P06	P05	P04	P03	P02	P01	P00	Port 0 direction register (DDR0)
Address: 000011H	P17	P16	P15	P14	P13	P12	P11	P10	Port 1 direction register (DDR1)
Address: 000012H	P27	P26	P25	P24	P23	P22	P21	P20	Port 2 direction register (DDR2)
Address: 000013H	P37	P36	P35	P34	P33	P32	P31	P30	Port 3 direction register (DDR3)
Address: 000014H	P47	P46	P45	P44	P43	P42	P41	P40	Port 4 direction register (DDR4)
Address: 000015H	P57	P56	P55	P54	P53	P52	P51	P50	Port 5 direction register (DDR5)
Address: 000016H	P67	P66	P65	P64	P63	P62	P61	P60	Port 6 direction register (DDR6)
Address: 000017H	—	P76	P75	P74	P73	P72	P71	P70	Port 7 direction register (DDR7)
Address: 000018H	P87	P86	P85	P84	P83	P82	P81	P80	Port 8 direction register (DDR8)
Address: 000019H	—	P96	P95	P94	P93	P92	P91	P90	Port 9 direction register (DDR9)
Address: 00001AH	—	—	PA5	PA4	PA3	PA2	PA1	PA0	Port A direction register (DDRA)
bit	15	14	13	12	11	10	9	8	
Address: 000034H	ADE7	ADE6	ADE5	ADE4	ADE3	ADE2	ADE1	ADE0	Analog input enable register (ADER)
bit	15/7	14/6	13/5	12/4	11/3	10/2	9/1	8/0	
Address: 00001BH	P07	P06	P05	P04	P03	P02	P01	P00	Port 0 resistor register (RDR0)
Address: 00001CH	P17	P16	P15	P14	P13	P12	P11	P10	Port 1 resistor register (RDR1)
Address: 00001DH	P27	P26	P25	P24	P23	P22	P21	P20	Port 2 resistor register (RDR2)
bit	15/7	14/6	13/5	12/4	11/3	10/2	9/1	8/0	
Address: 00001EH	—	P96	P95	P94	—	—	—	—	Port 9 pin register (ODR9)
Address: 00001FH	—	—	PA5	PA4	PA3	PA2	PA1	PA0	Port A pin register (ODRA)

Ports 0 to 5 in the MB90230 series share the external bus and pins. Each pin function is selected depending on the bus mode and register settings.

Pin name	Function				
	Single-chip mode	External bus extended mode		EPROM write	
		8 bits	16 bits		
P07 to P00	Port	D07 to D00		D07 to D00	
P17 to P10		Port	D15 to D08	D15 to D08	
P27 to P20		A07 to A00		A07 to A00	
P37 to P30		A15 to A08*1		A15 to A08	
P47 to P45		A23 to A16*1		A23 to A16	
P44		CLK*2		Not used	
P43 to P40		RDY*2			
P50		<u>HAK</u> *2			
P51		HRQ*2			
P52		Port	WRH*2	CE	
P53		WR	WRL*2	OE	
P54		RD		PGM	
P55		Port		“0”	
P56					
P57					

\*1: The pin can be used as an I/O port by setting the upper and middle address control registers.

\*2: The pin can be used as an I/O port by setting the external pin control register.


# MB90230 Series

## 2. 8-bit PWM (with 6 channels in this series)


The PWM module consists of a pair of 8-bit PWM output circuits. The MB90230 series incorporates a set of three PWM modules. They can output a waveform continuously from the port at an arbitrary duty factor according to the register settings.

- 8-bit down counter
- 8-bit data registers
- Compare circuit
- Control registers

### (1) Register Configuration

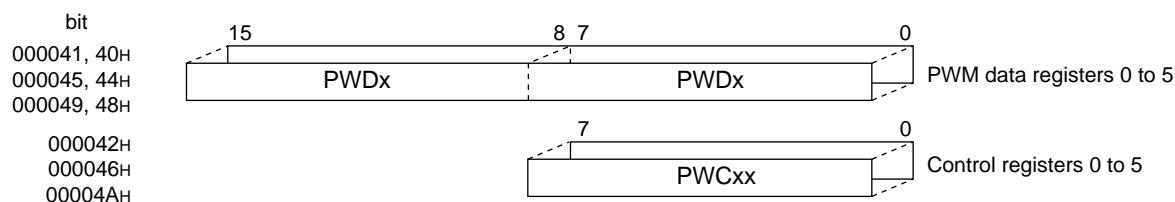

### (2) Block Diagram

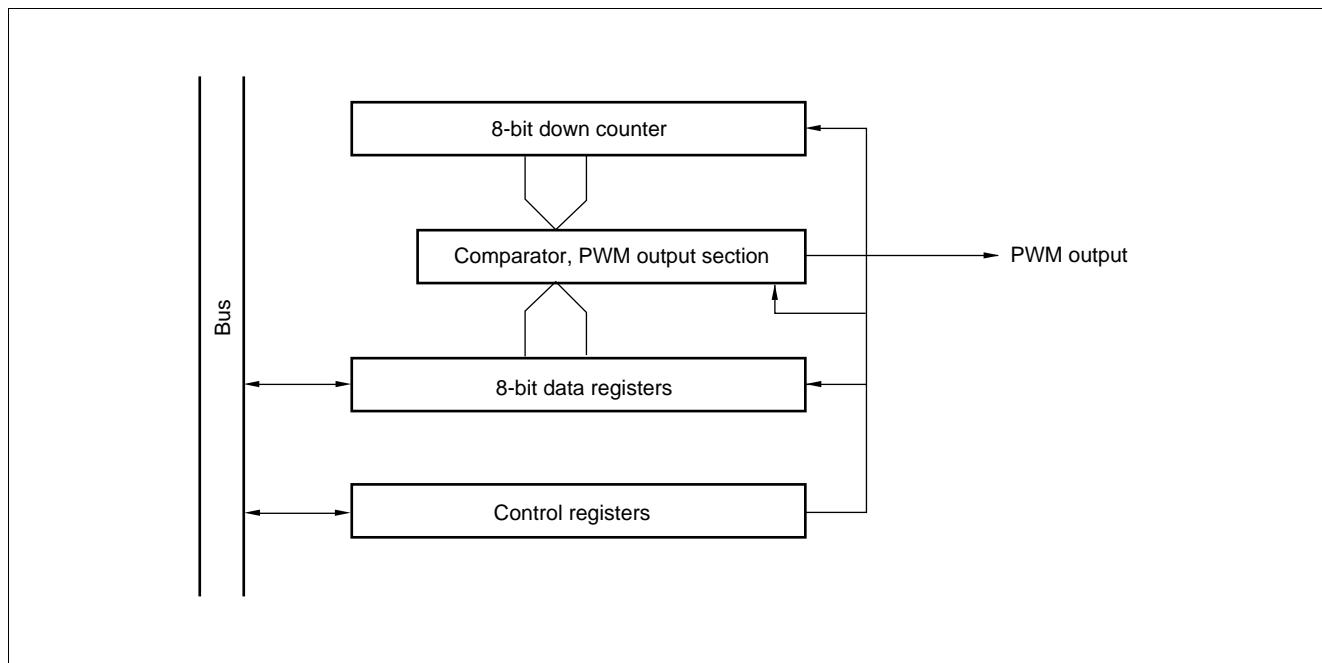


### 3. UART

The UART is a serial I/O port for synchronous or asynchronous communication with external resources. It has the following features:

- Full-duplex double buffering
- Data transfer synchronous or asynchronous with clock pulses
- Multiprocessor mode support (Mode 2)
- Internal dedicated baud-rate generator
- Arbitrary baud-rate setting from external clock input or internal timer
- Variable data length (7 to 9 bits (without parity bit); 6 to 8 bits (with parity bit))
- Error detection function (Framing, overrun, parity)
- Interrupt function (Two sources for transmission and reception)
- Transfer in NRZ format


## (1) Register Configuration

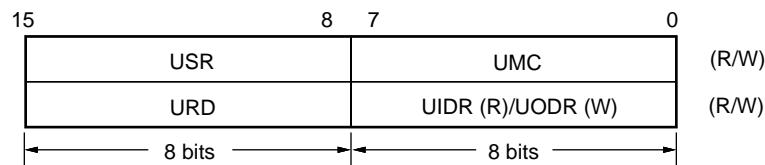

bit	7	6	5	4	3	2	1	0	
Address: 000020H	PEN	SBL	MC1	MC0	SMDE	RFC	SCKE	SOE	Mode control register (UMC)
bit	15	14	13	12	11	10	9	8	
Address: 000021H	RDRF	ORFE	PE	TDRE	RIE	TIE	RBF	TBF	Status register (USR)
bit	7	6	5	4	3	2	1	0	
Address: 000022H	D7	D6	D5	D4	D3	D2	D1	D0	Serial input data register Serial output data register (UIDR/UODR)
bit	15	14	13	12	11	10	9	8	
Address: 000023H	—	RC2	RC1	RC0	—	—	P	D8	Rate and data register (URD)
bit	15	14	13	12	11	10	9	8	
Address: 00002DH	MD	—	—	—	DIV3	DIV2	DIV1	DIV0	Communication prescaler (CDCR)

# MB90230 Series

## (2) Block Diagram

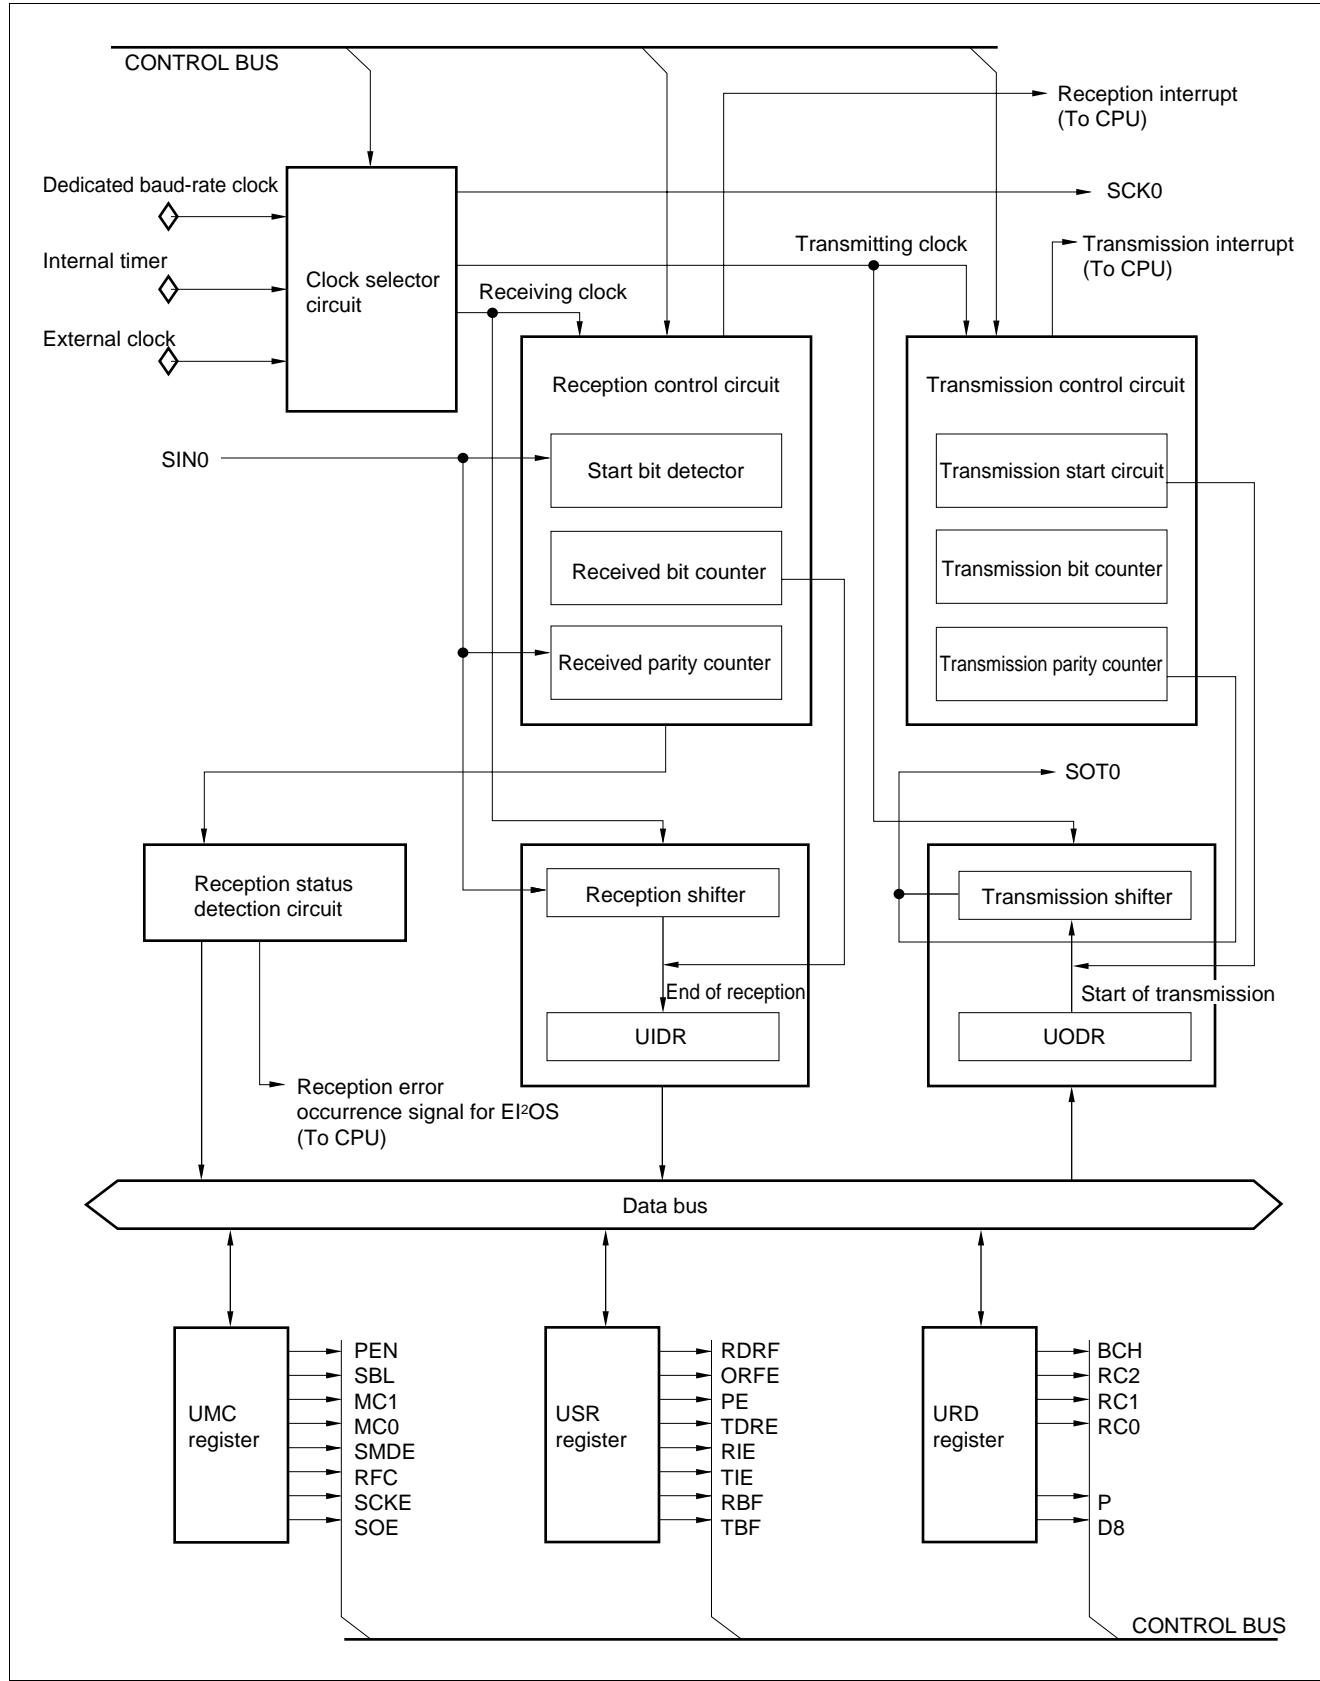

## 4. Extended Serial I/O Interface

This block is a serial I/O interface implemented on a single 8-bit channel that can transfer data in synchronization with clock pulses. It allows the “LSB first” or “MSB first” option to be selected for data transfer. The serial I/O port to be used can also be selected.


There are two serial I/O operation modes available:

- Internal shift clock mode: Transfers data in synchronization with internal clock pulses.
- External shift clock mode: Transfers data in synchronization with clock pulses entered from an external pin (SCK<sub>x</sub>). In this mode, data can be transferred by instructions from the CPU by operating the general-purpose port that shares the external pin (SCK<sub>x</sub>).

### (1) Register Configuration

bit	15	14	13	12	11	10	9	8	
Address: 000025H	SMD2	SMD1	SMD0	SIE	SIR	BUSY	STOP	STRT	
bit	7	6	5	4	3	2	1	0	
Address: 000024H	—	—	—	OUTC	MODE	BDS	SOE	SCOE	Serial mode control status register (SMCS)
bit	7	6	5	4	3	2	1	0	
Address: 000026H	D7	D6	D5	D4	D3	D2	D1	D0	Serial data register (SDR)

### (2) Block Diagram

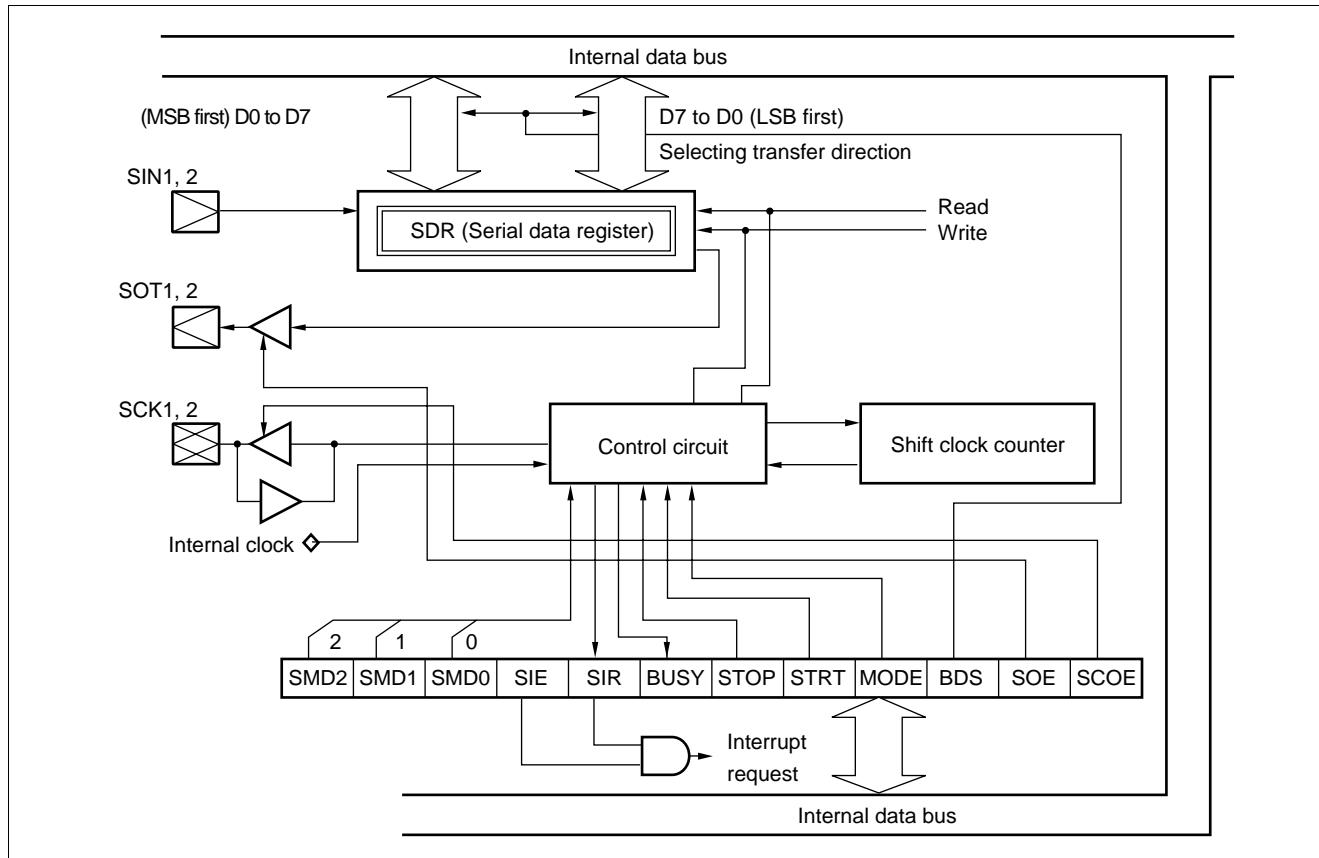


# MB90230 Series

## 5. A/D Converter


The A/D converter converts the analog input voltage to a digital value. It has the following features:

- Conversion time: 5  $\mu$ s min. per channel (at 16 MHz machine clock)
- RC-type successive approximation with sample-and-hold circuit
- 8-bit or 10-bit resolution
- Eight analog input channels programmable for selection
- A/D conversion mode selectable from the following three:
  - One-shot conversion mode: Converts a specified channel once.
  - Consecutive conversion mode: Converts a specified channel repeatedly.
  - Stop conversion mode: Converts one channel and suspends its own operation until the next activation (allowing synchronized conversion start).
- Conversion mode:
  - Single conversion mode: Converts one channel (when the start and stop channels are the same).
  - Scan conversion mode: Converts multiple consecutive channels (when the start and stop channels are different).
- On completion of A/D conversion, the converter can generate an interrupt request for termination of A/D conversion to the CPU. This interrupt generation can activate the EI<sup>2</sup>OS to transfer the A/D conversion result to memory, making the converter suitable for continuous operation.
- Conversion can be activated by software, external trigger (falling edge), and/or timer (rising edge) as selected.

### (1) Register Configuration

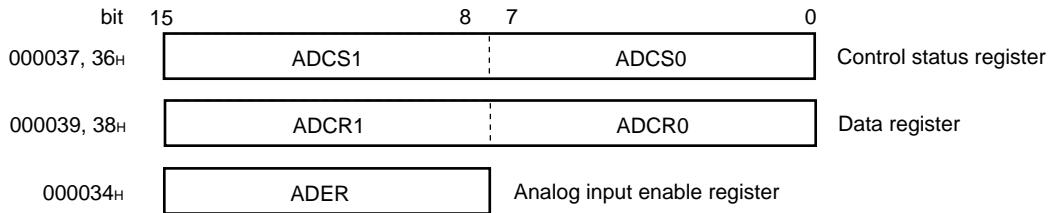

## (2) Block Diagram

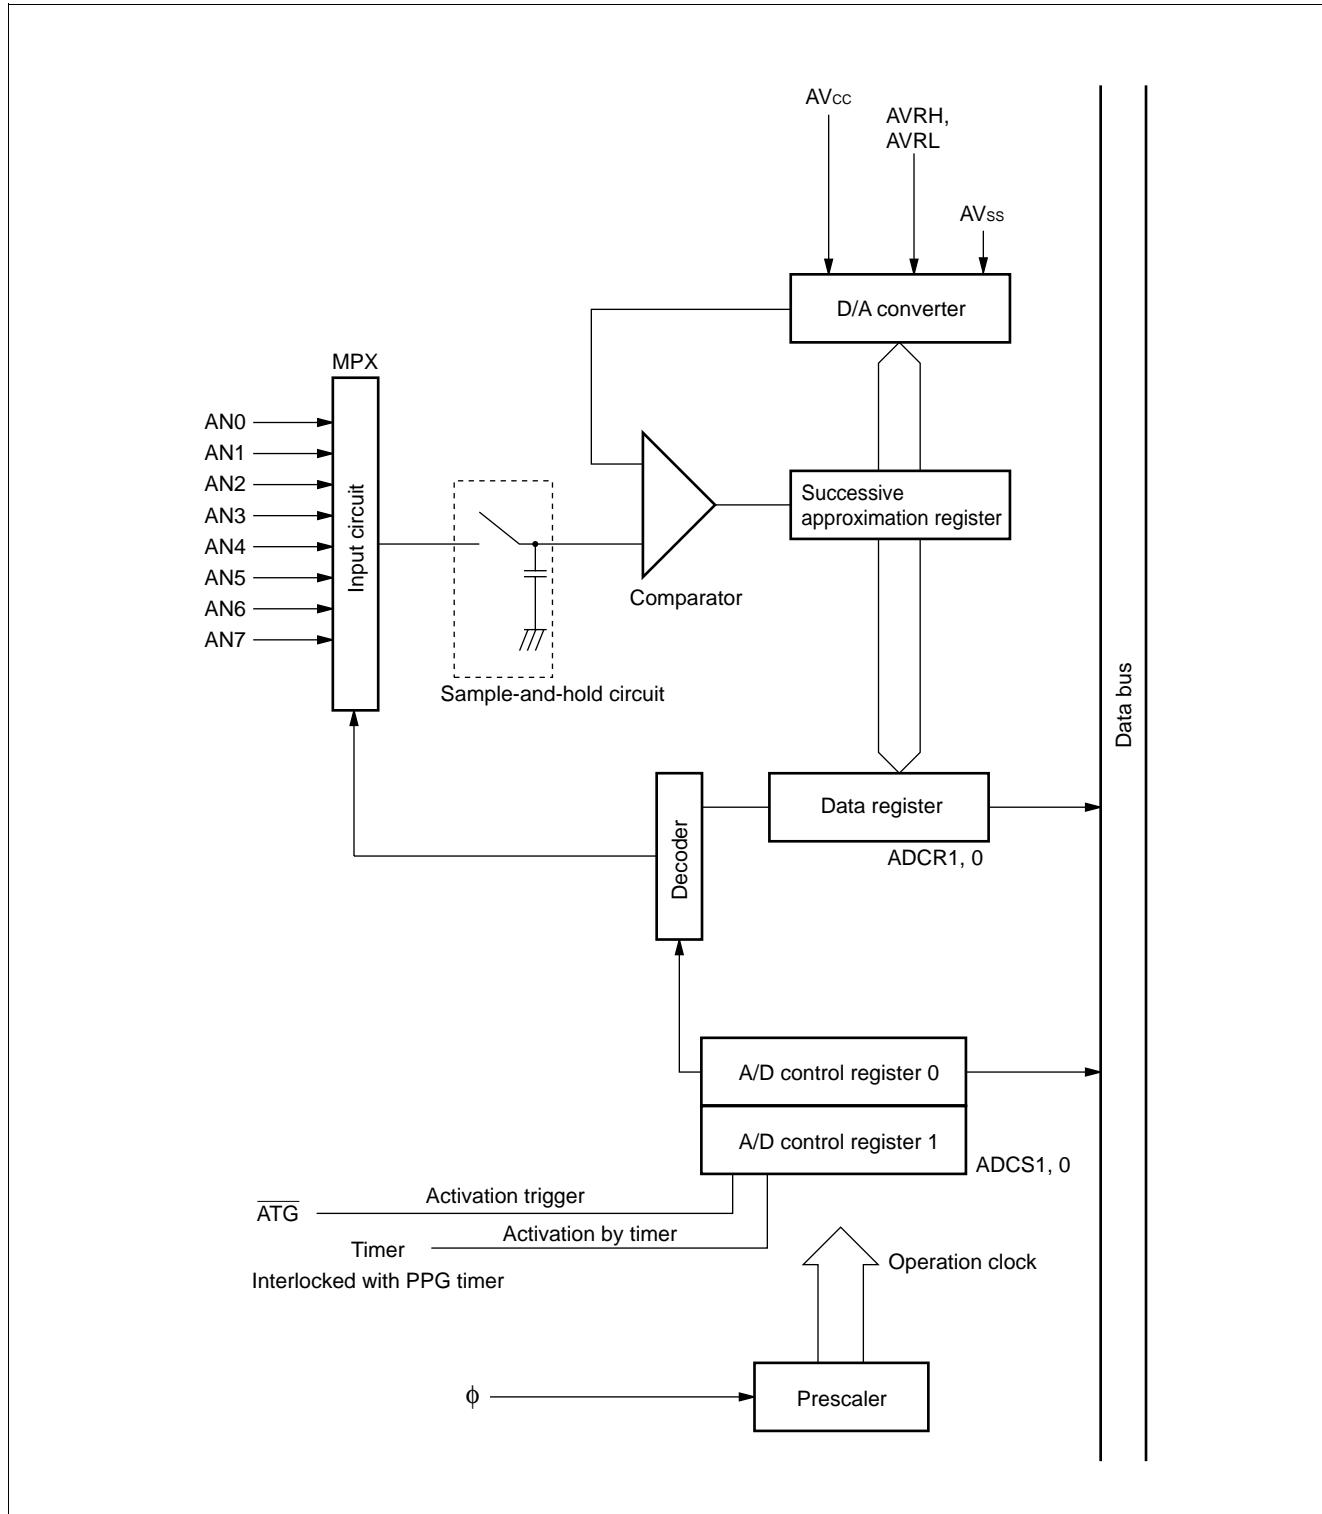

## 6. 16-bit I/O Timer

The 16-bit I/O timer consists of 16-bit free run timer, 6-line output compare, and 4-line input capture modules.

The 16-bit I/O timer can output six independent waveforms based on the 16-bit free run timer, allowing the input pulse width and external clock cycle to be measured.

### (1) Outline of Functions

#### 16-bit free run timer (× 1)

The 16-bit free run timer consists of a 16-bit up-count timer, a control register, and a prescaler. The value output from this timer/counter is used as the base time by the input capture and output compare modules.

- The counter operation clock cycle can be selected from the following four:  
Four internal clock cycles ( $\phi/4$ ,  $\phi/16$ ,  $\phi/32$ ,  $\phi/64$ )
- The interrupt counter value can be generated by compare/match operation with the overflow register and compare register 0 (compare/match operation requires the mode setting).
- The counter value can be initialized to “0000H” by compare/match operation with the reset register, software clear register, and compare register 0.

#### Output compare module (× 6)

The output compare module consists of six 16-bit compare registers, compare output latches, and control registers. When the compare value matches the 16-bit free run timer value, this module can generates an interrupt while inverting the output level.

- Six compare registers can operate independently, and have each output pin and interrupt flag.
- Two compare registers can be used to control the same output pin.
- The initial value for each output pin can be set.
- The interrupt can be generated by compare/match operation.


#### Input capture module (× 4)

The input capture module consists of four external input pins and associated capture and control registers. This module can detect an arbitrary edge of the signal input from each external input pin to generate an interrupt while holding the 16-bit free run timer value in the capture register.


- The external input signal edge can be selected from the rising edge, falling edge or both edges.
- Four input capture lines can operate independently.
- The interrupts can be generated by a valid edge of external input signals. The extended intelligent I/O service (EI<sup>2</sup>OS) can be activated.

## (2) Register Configuration


- **16-bit free run timer**

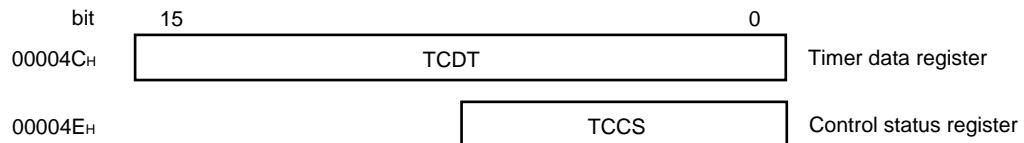

- **16-bit output compare module**

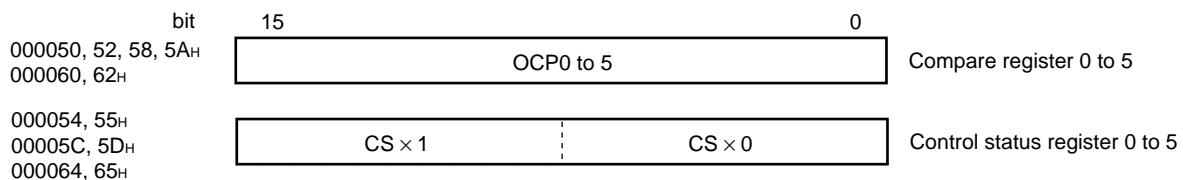


- **16-bit input capture module**

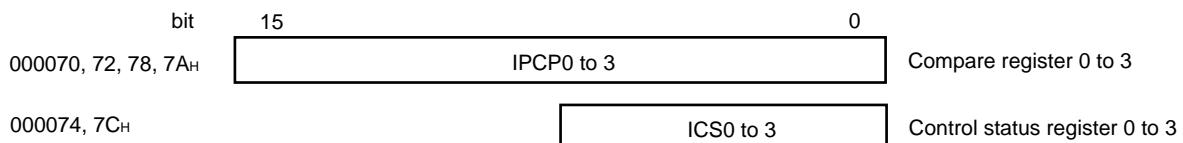

# MB90230 Series

## (3) Block Diagram

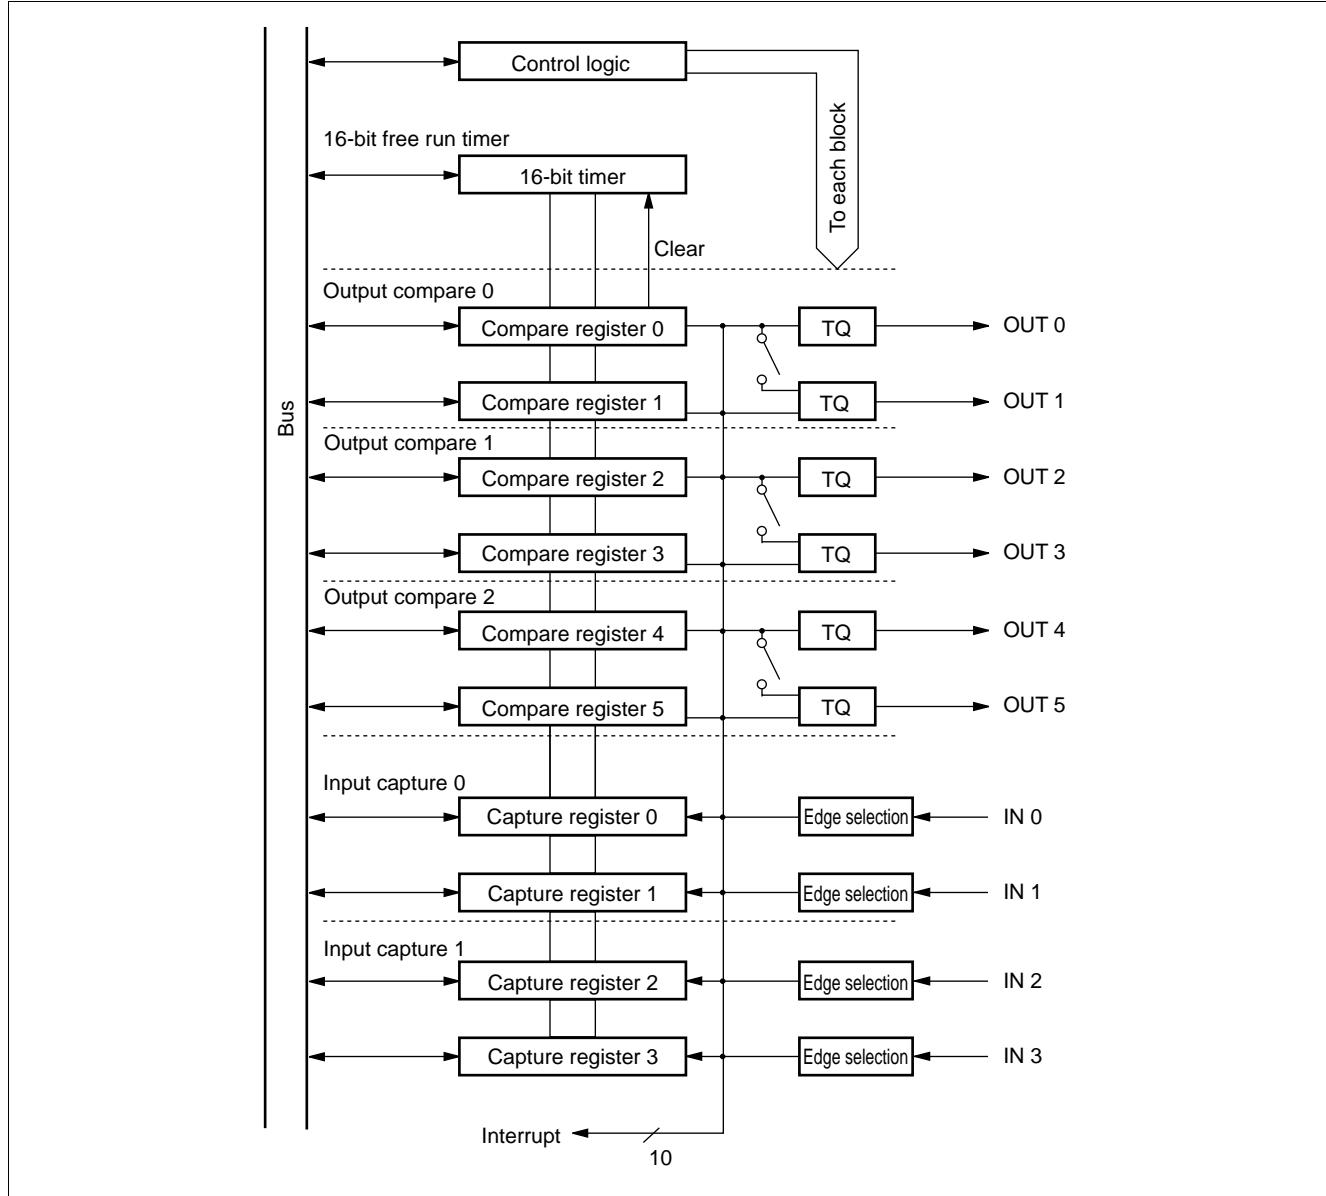

## 7. PPG Timer (Programmable Pulse Generator)

This module can output the pulse synchronized with an external or software trigger. The cycle and duty factor of the output pulse can be changed arbitrarily by changing the values in two 8-bit registers.

PWM function: Outputs a pulse in programmable mode while changing the values in the two registers in synchronization with the input trigger.


This module can also be used as a D/A converter using an external circuit.

Single-shot function: Detects the trigger input edge to output a single pulse.

### (1) Module Configuration


This module consists of an 8-bit down counter, prescaler, 8-bit cycle setting register, 8-bit duty factor setting register, 16-bit control register, external trigger input pin, and PPG output pin.

### (2) Register Configuration

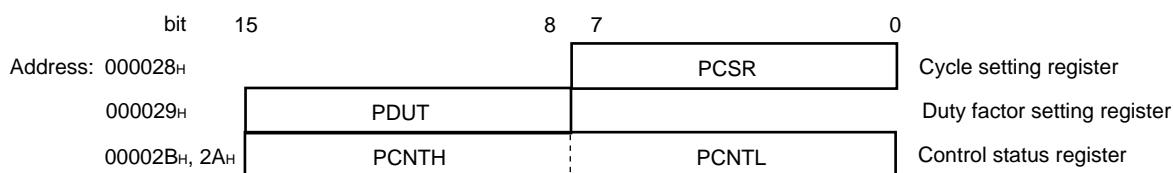

# MB90230 Series

## (3) Block Diagram

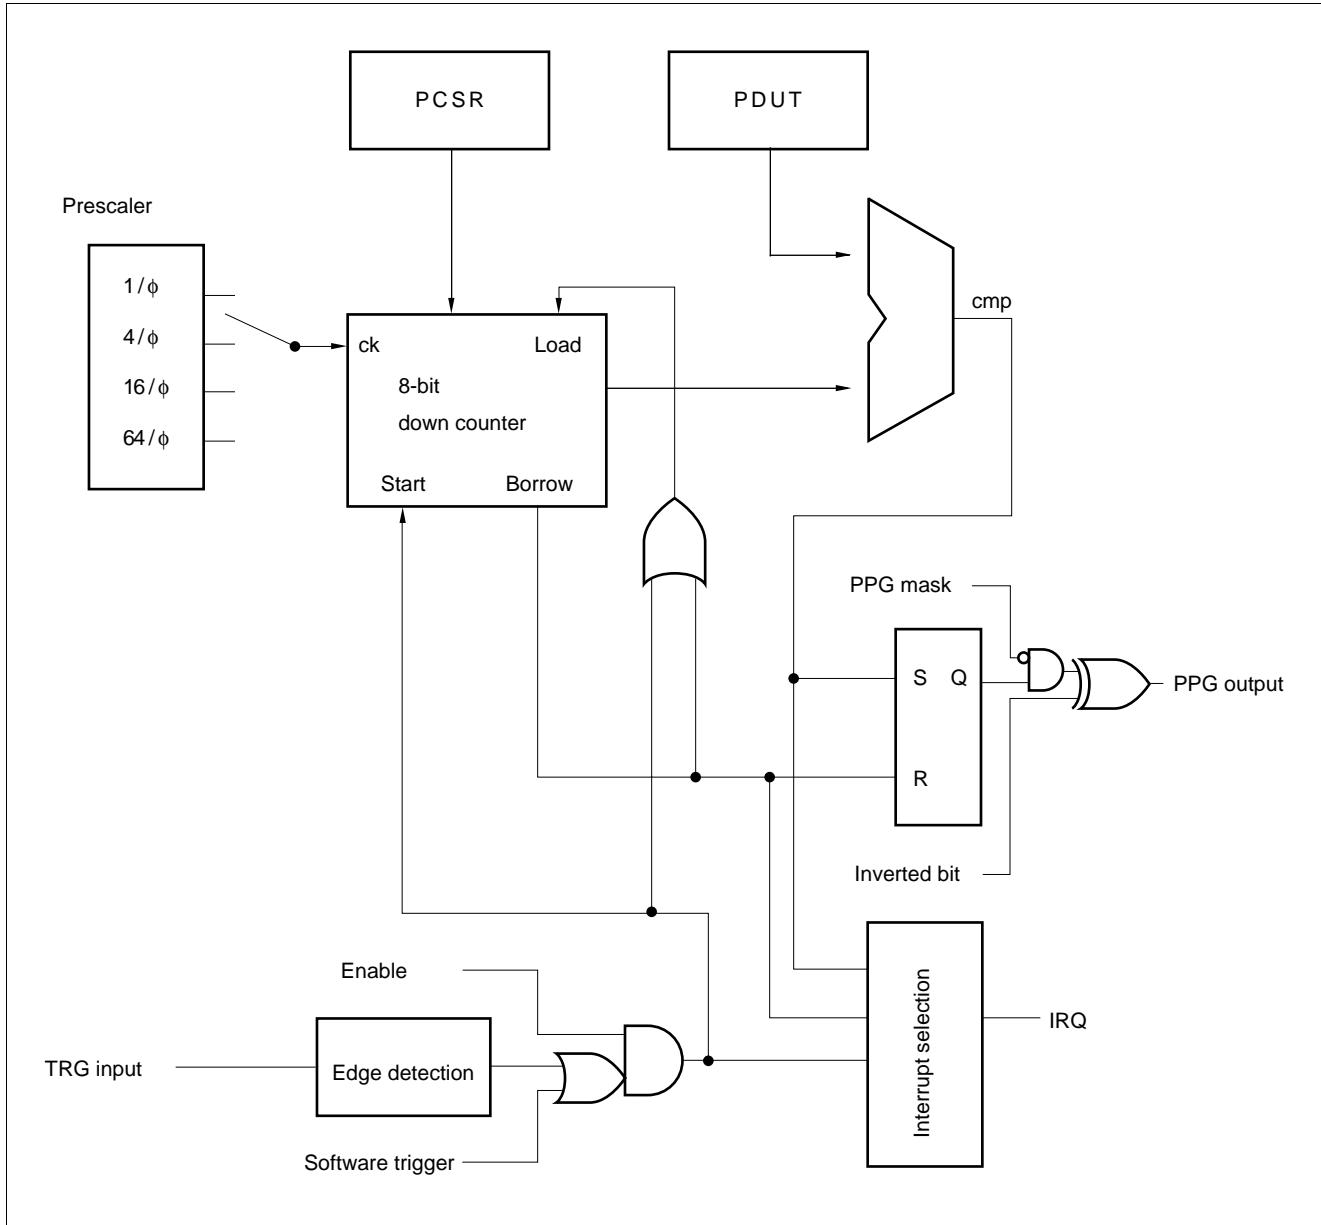

## 8. Serial E<sup>2</sup>PROM Interface

This module is the interface circuit dedicated to external bit-serial E<sup>2</sup>PROM.

### (1) Features


- Instruction code support (compatible with the MB8557).
- Selectable address length: 8 to 11 bits
- Selectable data length: 8 or 16 bits
- Automatic address increment function
- Transmit/receive data transfer enabled by EI<sup>2</sup>OS
- Up to 2048-by-16 bit access enabled (at an address length of 11 bits and a data length of 16 bits)

### (2) Register Configuration

bit	15	8	7	0	Status format register				
						Data register			
		Address register							
bit	15	14	13	12	11	10	9	8	Format status register (ECTS)
Address: 000081H	IFEN	INT	INTE	BUSY	ADL1	ADL0	DTL	CON	
bit	7	6	5	4	3	2	1	0	Op code register (EOPC)
Address: 000080H	—	—	—	—	OP3	OP2	OP1	OP0	
bit	15	14	13	12	11	10	9	8	Data register (EDAT)
Address: 000083H	D15	D14	D13	D12	D11	D10	D9	D8	
bit	7	6	5	4	3	2	1	0	Data register (EDAT)
Address: 000082H	D7	D6	D5	D4	D3	D2	D1	D0	
bit	15	14	13	12	11	10	9	8	Address register (EADR)
Address: 000085H	CLK	FRQ	—	—	—	A10	A9	A8	
bit	7	6	5	4	3	2	1	0	Address register (EADR)
Address: 000084H	A7	A6	A5	A4	A3	A2	A1	A0	

# MB90230 Series


## (3) Block Diagram

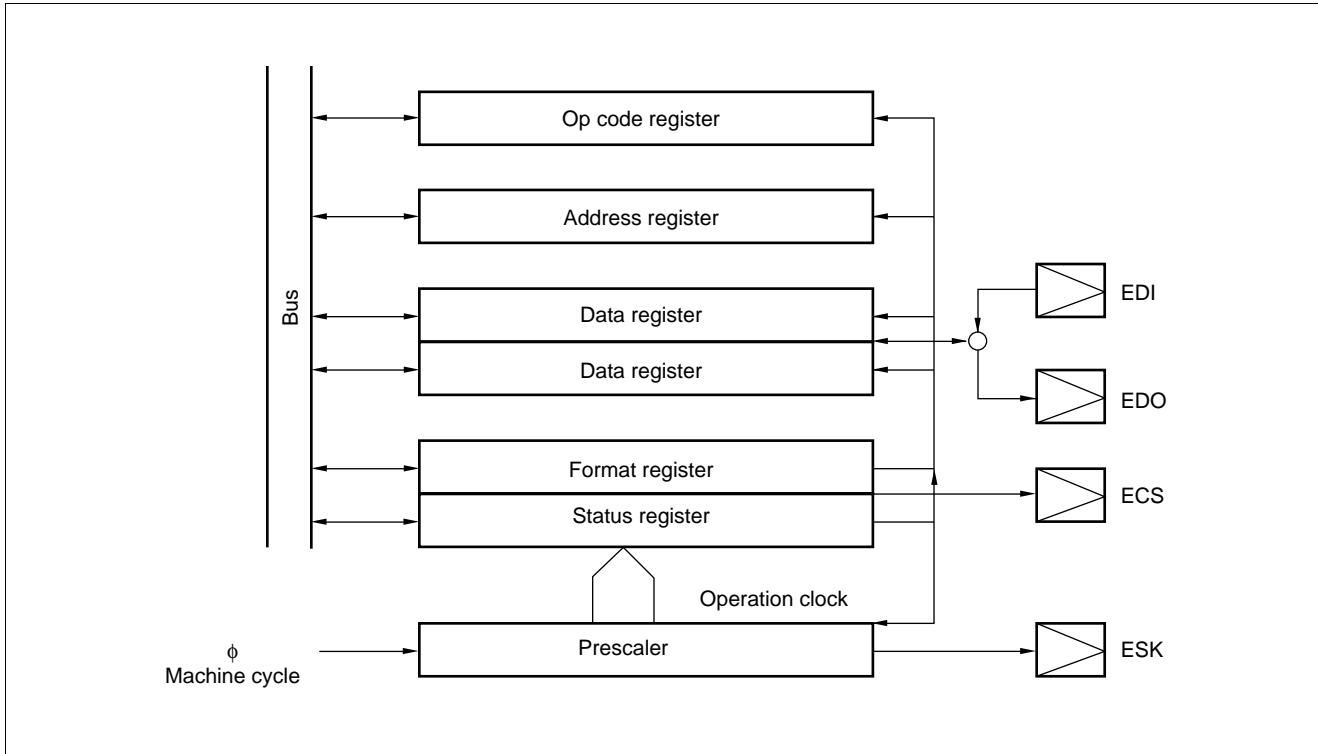


## 9. DTP/External Interrupt

The data transfer peripheral (DTP) is located between external peripherals and the F<sup>2</sup>MC-16F CPU. It receives a DMA request or interrupt request generated by the external peripherals and reports it to the F<sup>2</sup>MC-16F CPU to activate the extended intelligent I/O service or interrupt handler. The user can select two request levels of "H" and "L" for extended intelligent I/O service (EI<sup>2</sup>OS) or, four request levels of "H," "L," rising edge, and falling edge for external interrupt requests.

### (1) Register Configuration

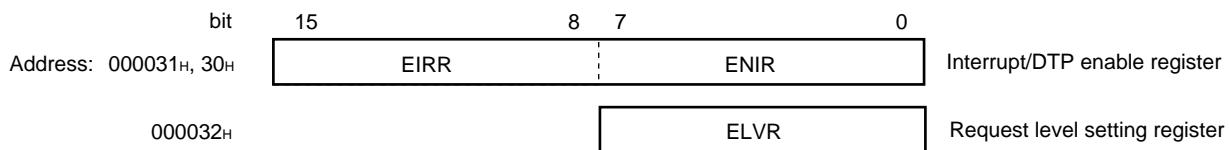

### (2) Block Diagram

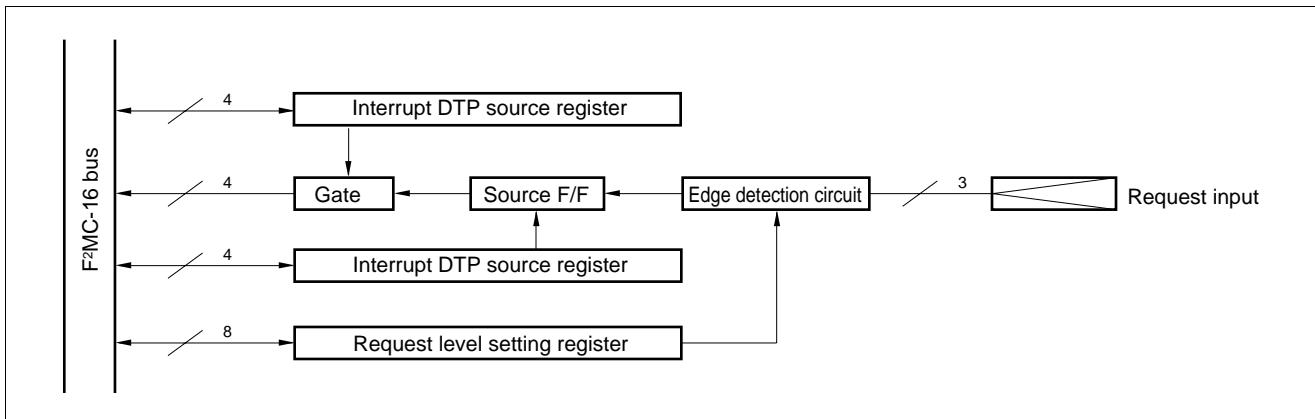

# MB90230 Series

## 10. D/A Converter

This block is an R-2R type D/A converter with 8-bit resolution.

The D/A converter incorporates two channels, each of which can be controlled for output independently by the D/A control register.


### (1) Register Configuration

DAT1	bit	15	14	13	12	11	10	9	8	
	Address: 00003DH	DA17	DA16	DA15	DA14	DA13	DA12	DA11	DA10	D/A converter data register 1
DAT0		7	6	5	4	3	2	1	0	
	Address: 00003CH	DA07	DA06	DA05	DA04	DA03	DA02	DA01	DA00	D/A converter data register 2

DACR	bit	7	6	5	4	3	2	1	0	
	Address: 00003EH	—	—	—	—	—	—	DAE1	DAE0	D/A control register

### (2) Block Diagram

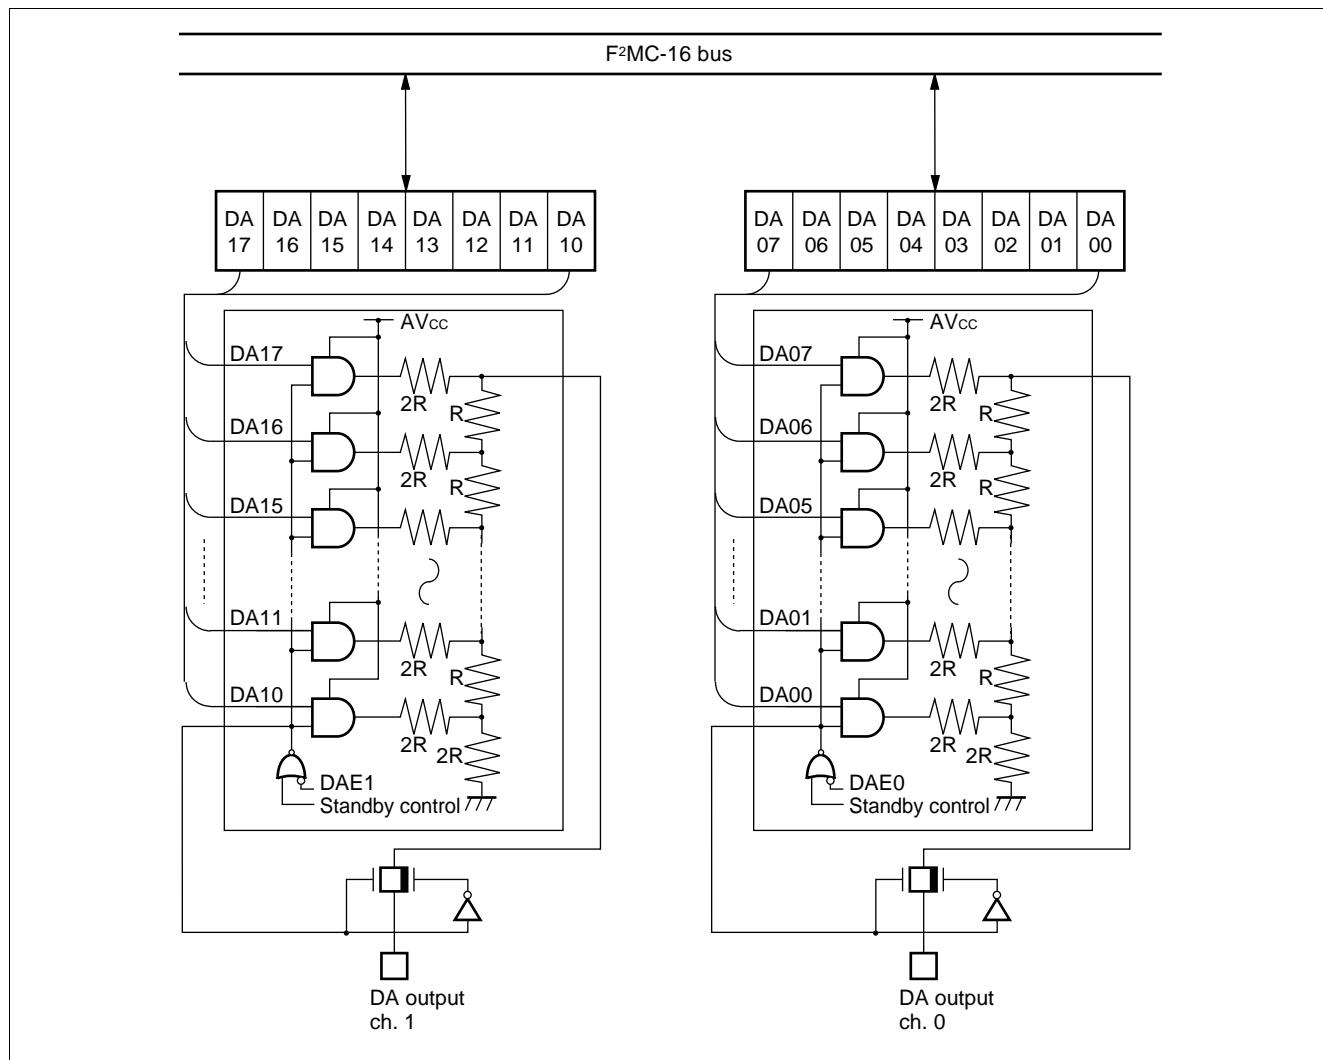


## 11. Level Comparator

This module compares the input level (by checking whether it is high or low).


The module consists of a comparator, 4-bit resistor ladder, and control register.

- The external input can be compared to the internal 4-bit resistor ladder.

## (1) Register Configuration




## (2) Block Diagram

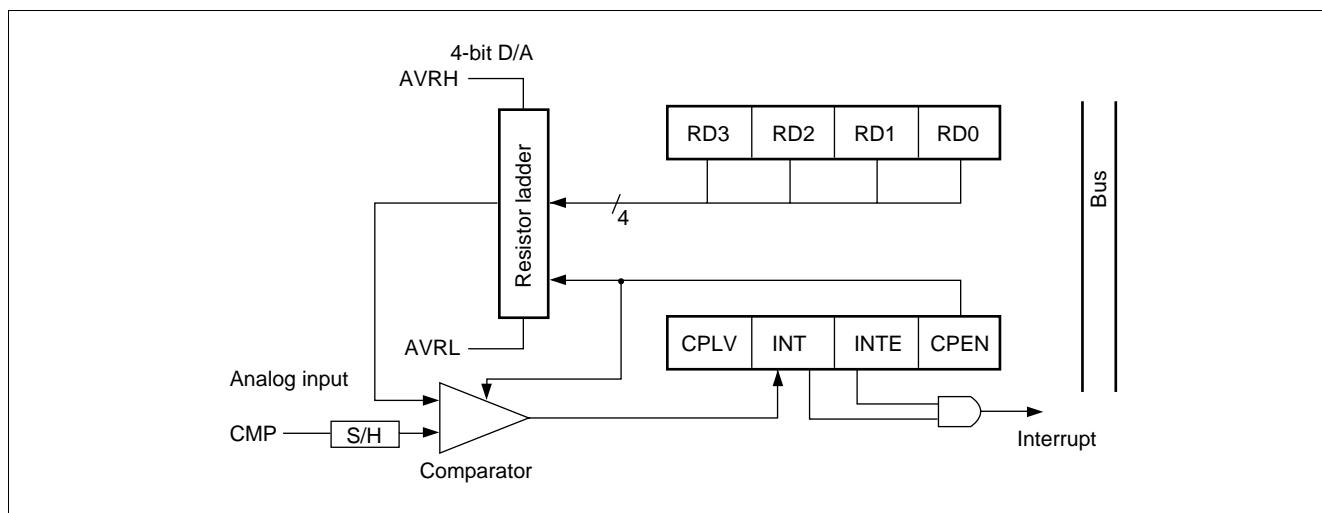


## 12. Watchdog Timer and Timebase Timer

The watchdog timer consists of a 2-bit watchdog counter using carry signals from an 18-bit timebase counter as the clock source, a control register, and a watchdog reset control section. The timebase timer consists of an 18-bit timer and an interval interrupt control circuit.

### (1) Register Configuration



### (2) Block Diagram

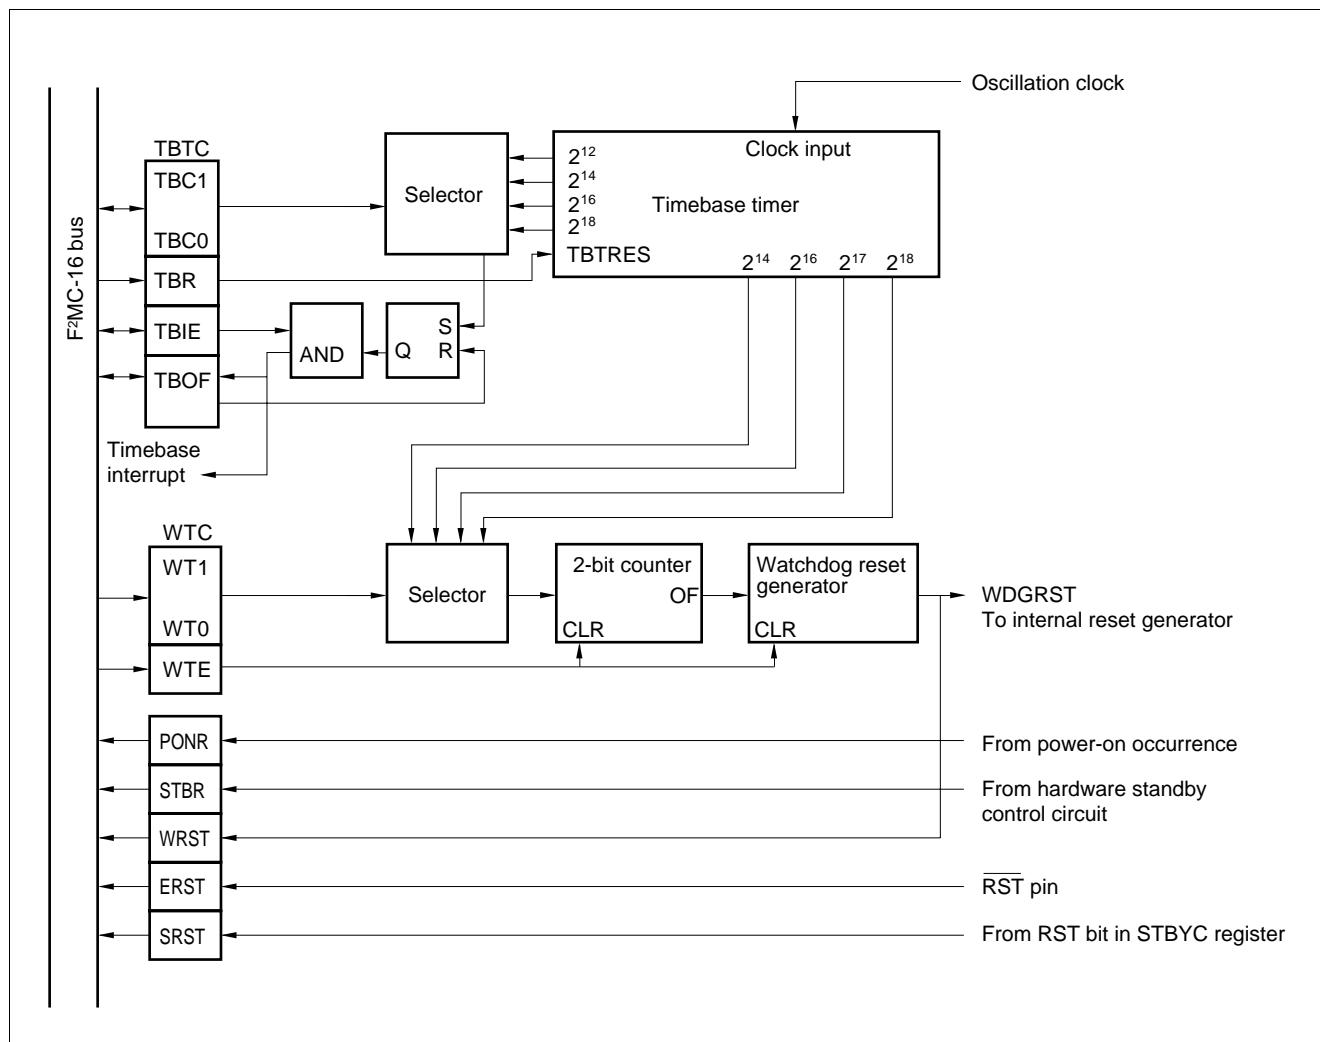


## 13. Delay Interrupt Generation Module

The delayed interrupt generation module is used to generate an interrupt for task switching. Using this module allows an interrupt request to the F<sup>2</sup>MC-16F CPU to be generated or canceled by software.

### (1) Register Configuration

bit	15	14	13	12	11	10	9	8	
Delayed interrupt source generate/release register	—	—	—	—	—	—	—	—	DIRR
Address: 00009F <sub>H</sub>	(—)	(—)	(—)	(—)	(—)	(—)	(—)	(—)	
Read/write →	(X)	(R/W)	Initial value → (0)						

### (2) Block Diagram

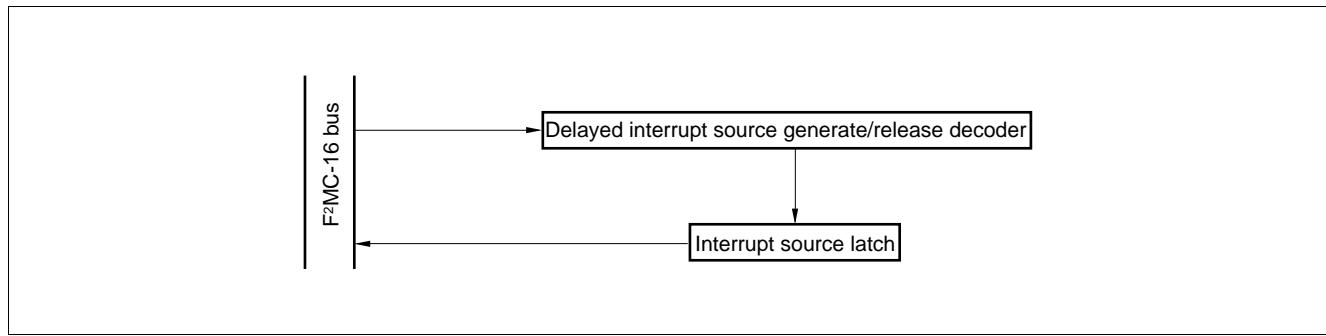

## 14. Clock Output Control Register

The clock output control register outputs the output from the communication prescaler to the pin.


### (1) Register Configuration

bit	15	14	13	12	11	10	9	8	
Clock control register	—	—	—	—	—	CKEN	FRQ1	FRQ0	CLKR
Address: 00002E <sub>H</sub>	(—)	(—)	(—)	(—)	(—)	(R/W)	(R/W)	(R/W)	
Read/write →	(—)	(—)	(—)	(—)	(—)	(0)	(0)	(0)	Initial value →


## 15.Low-power Consumption Control Circuit

The low-power consumption control circuit consists of a low-power consumption control register, clock generator, standby status control circuit, and gear divider circuit. These internal circuits implements the sleep, stop, and hardware standby modes as well as the clock gear function. The gear function allows the machine clock cycle to be selected as a division of the frequency of crystal oscillation or external clock input by 1, 2, 4, or 16.

### (1) Register Configuration



### (2) Block Diagram

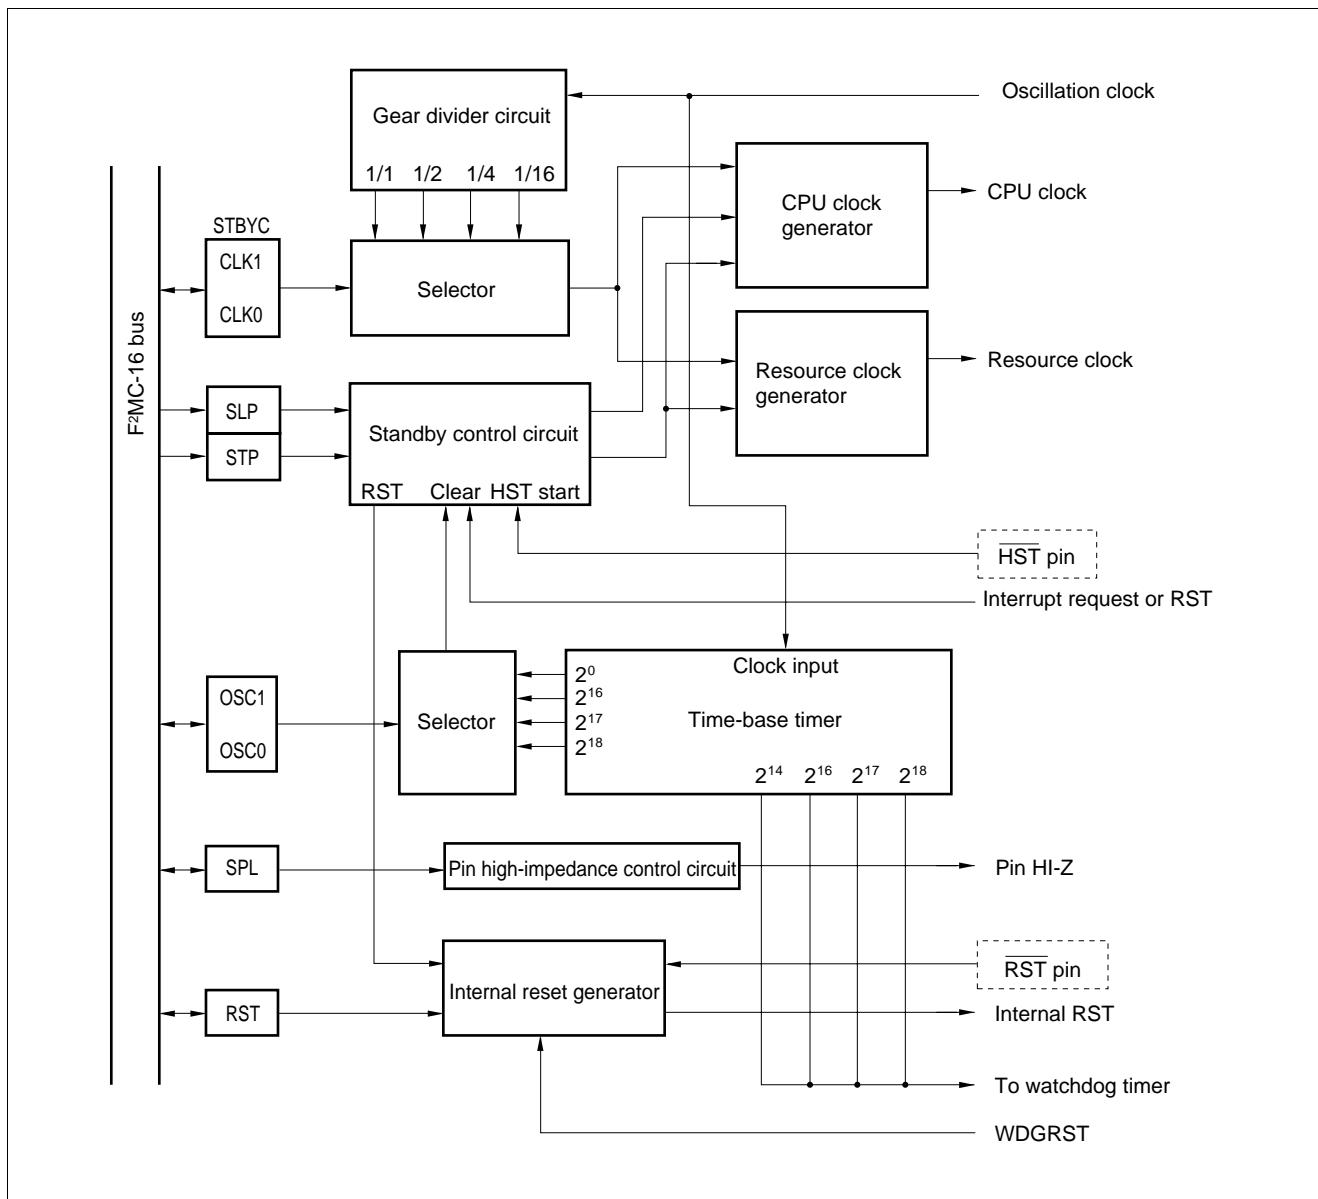

## ■ ELECTRICAL CHARACTERISTICS

### 1. Absolute Maximum Ratings

Parameter	Symbol	Value		Unit	Remarks
		Min.	Max.		
Power supply voltage	V <sub>CC</sub>	V <sub>SS</sub> – 0.3	V <sub>SS</sub> + 7.0	V	
	AV <sub>CC</sub> , AV <sub>SS</sub> AVRH, AVRL	V <sub>CC</sub> – 0.3 <sup>*1</sup>	V <sub>SS</sub> + 7.0	V	
Input voltage	V <sub>I</sub> <sup>*2</sup>	V <sub>SS</sub> – 0.3	V <sub>CC</sub> + 0.3	V	
Output voltage	V <sub>O</sub> <sup>*2</sup>	V <sub>SS</sub> – 0.3	V <sub>CC</sub> + 0.3	V	
“L” level output current	I <sub>OL</sub>	—	20	mA	
“L” level average output current	I <sub>OLAV</sub>	—	4	mA	
“L” level total output current	ΣI <sub>OL</sub>	—	50	mA	
“H” level output current	I <sub>OH</sub>	—	-10	mA	
“H” level average output current	I <sub>OHAV</sub>	—	-4	mA	
“H” level total output current	ΣI <sub>OH</sub>	—	-50	mA	
Power consumption	P <sub>D</sub>	—	400	mW	
Operating temperature	T <sub>A</sub>	-40	+70	°C	
Storage temperature	T <sub>STG</sub>	-55	+150	°C	

\*1: AVRH, AVRL, or AV<sub>CC</sub> must not exceed V<sub>CC</sub>.

AV<sub>SS</sub> and AVRH must not exceed AVRH and AV<sub>CC</sub>, respectively.

V<sub>CC</sub> ≥ AV<sub>CC</sub> ≥ AVRH > AVRL ≥ AV<sub>SS</sub> ≥ V<sub>SS</sub>

\*2: V<sub>I</sub> or V<sub>O</sub> must not exceed “V<sub>CC</sub> + 0.3 V.”

**WARNING:** Permanent device damage may occur if the above “Absolute Maximum Ratings” are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### 2. Recommended Operating Conditions

Parameter	Symbol	Value		Unit	Remarks
		Min.	Max.		
Power supply voltage	V <sub>CC</sub>	4.75	5.25	V	During normal operation
		3.0	5.5	V	In stop mode
Operating temperature	T <sub>A</sub>	-40	+70	°C	

# MB90230 Series

## 3. DC Characteristics

( $V_{CC} = 5.0 \text{ V} \pm 5\%$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+70^\circ\text{C}$ )

Parameter	Symbol	Pin name	Condition	Value			Unit	Remarks
				Min.	Typ.	Max.		
"H" level input voltage	$V_{IH}$	*1	$V_{CC} = 5.0 \text{ V} \pm 5\%$	0.7 $V_{CC}$	—	$V_{CC} + 0.3$	V	
	$V_{IHS}$	*2		0.8 $V_{CC}$	—	$V_{CC} + 0.3$	V	Hysteresis input
	$V_{IHM}$	*3		$V_{CC} - 0.3$	—	$V_{CC} + 0.3$	V	MD0 to 2
"L" level input voltage	$V_{IL}$	*1	$V_{CC} = 5.0 \text{ V} \pm 5\%$	$V_{SS} - 0.3$	—	0.3 $V_{CC}$	V	
	$V_{ILS}$	*2		$V_{SS} - 0.3$	—	0.2 $V_{CC}$	V	Hysteresis input
	$V_{ILM}$	*3		$V_{SS} - 0.3$	—	$V_{SS} + 0.3$	V	MD0 to 2
"H" level output voltage	$V_{OH}$	*1, *2	$V_{CC} = 4.75 \text{ V}$ $I_{OH} = -2.0 \text{ mA}$	2.4	—	—	V	
"L" level output voltage	$V_{OL}$	*1, *2	$V_{CC} = 4.75 \text{ V}$ $I_{OL} = 1.8 \text{ mA}$	—	—	0.4	V	
Input leakage current	$I_{IH}$	*1, *2, *3	$V_{SS} + 4.75 \text{ V}$ $< V_i < V_{CC}$	-10	—	10	$\mu\text{A}$	
Power supply current	$I_{CC}$	$V_{CC}$	$V_{CC} = 5.0 \text{ V} \pm 5\%$ $f_C = 16 \text{ MHz}$	—	48	80	mA	
	$I_{CCS}$			—	15	25	mA	In sleep mode
	$I_{CCH}$			—	10	—	$\mu\text{A}$	In stop mode
Input capacity	$C_{IN}$	Other than $V_{CC}$ and $V_{SS}$	—	—	10	—	$\text{pF}$	
Open-drain output leakage current (N-channel Tr OFF)	$I_{LEAK}$	*4	—	—	0.1	10	$\mu\text{A}$	
Pull-up current	$I_{PULL}$	*5	—	-250	—	-50	$\mu\text{A}$	

\*1: CMOS I/O pin (Other than hysteresis pins)

\*2: Hysteresis input pins: P46/TRG, P70/ATG, P71/ESI, P80/INT0, P81/INT1, P82/OUT0/INT2, P83/OUT1/INT3, P90/IN0, P91/IN1, P92/IN2, P93/IN3/CKOT, P94/SIN0, P96/SCK0, PA0/SIN1, PA2/SCK1, PA3/SIN2, PA5/SCK2

\*3: Mode pins MD2 to MD0

\*4: Open-drain pins P94 to P96 and PA0 to PA5: Set by registers


\*5: Pins with pull-up resistor RST and P00 to P27: Set by registers

#### 4. AC Characteristics

##### (1) Clock Timing Standards

( $V_{CC} = +5.0\text{ V} \pm 5\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+70^\circ\text{C}$ )

Parameter	Symbol	Pin name	Condition	Value		Unit	Remarks
				Min.	Max.		
Clock frequency	$f_C$	X0 X1	$V_{CC} = 5.0\text{ V} \pm 5\%$	1	16	MHz	
Clock cycle time	$t_C$	X0 X1	$V_{CC} = 5.0\text{ V} \pm 5\%$	62.5	—	ns	
Input clock pulse width	$P_{WH}$ $P_{WL}$	X0	$V_{CC} = 5.0\text{ V} \pm 5\%$	25.0	—	ns	Duty = 60%
Input clock rising/falling time	$t_{cr}$ $t_{cf}$	X0	—	5	10	ns	

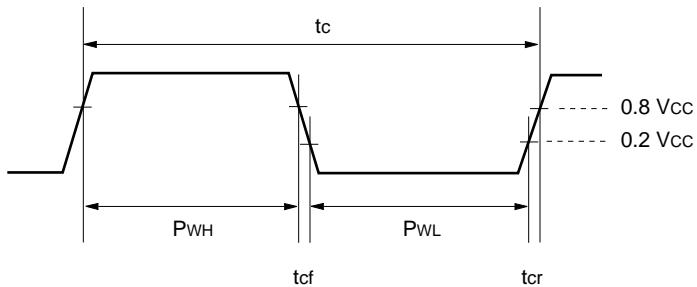

# MB90230 Series

## (2) Reset, Hardware Standby, and Trigger Input Standards

( $V_{CC} = +5.0\text{ V} \pm 5\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+70^\circ\text{C}$ )

Parameter	Symbol	Pin name	Condition	Value		Unit	Remarks
				Min.	Max.		
Reset input time	$t_{RSTL}$	$\overline{RST}$	—	5	—	Machine cycle*	
Hardware standby input time	$t_{HSTL}$	$\overline{HST}$	—	5	—	Machine cycle*	
A/D start trigger input time	$t_{ATGX}$	$\overline{ATG}$	—	5	—	Machine cycle*	
PPG start trigger input time	$t_{PPGL}$	TRG	—	5	—	Machine cycle*	
Input capture input trigger	$t_{INP}$	IN0 to IN3	—	5	—	Machine cycle*	


\*Machine cycle:  $t_{CYC} = 1/\text{machine clock} = 1/(f_c \div N)$

$f_c$ : Oscillation frequency

N: Gear divide ratio (1, 2, 4, 16)

Note: Clock input is required during reset.


The machine cycle at hardware standby input is set to 1/32 divided oscillation.

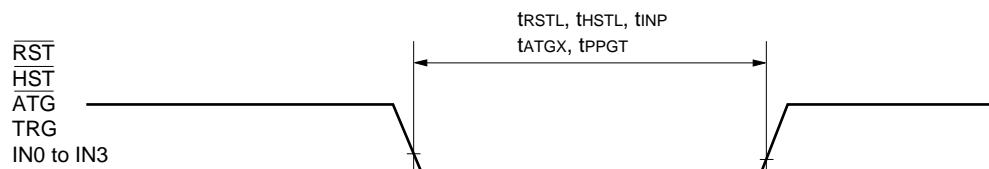


### (3) Power-on Reset

( $V_{CC} = +5.0 \text{ V} \pm 5\%$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+70^\circ\text{C}$ )

Parameter	Symbol	Pin name	Condition	Value		Unit	Remarks
				Min.	Max.		
Power supply riseing time	$t_R$	$V_{CC}$	—	—	50	ms	
Power-off time	$t_{OFF}$		—	1	—	ms	

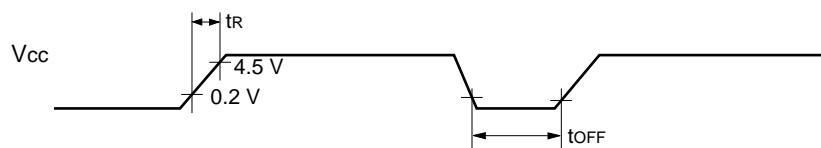

Keep in mind that abrupt changes in supply voltage may cause a power-on reset.

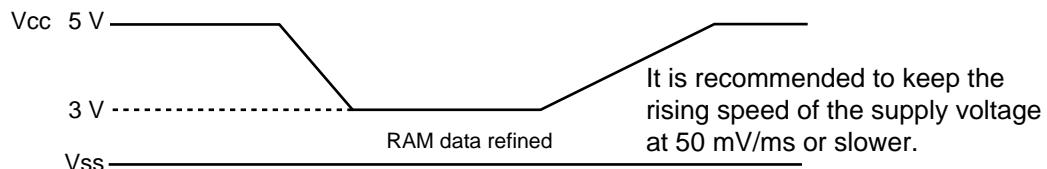

# MB90230 Series


## (4) UART Timing

( $V_{CC} = +5.0 \text{ V} \pm 5\%$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+70^\circ\text{C}$ )


Parameter	Symbol	Pin name	Condition	Value		Unit	Remarks
				Min.	Max.		
Serial clock cycle time	tSCYC	—	Internal clock operation output pin: $C_L = 80 \text{ pF}$	8 tCyc	—	ns	
SCK $\downarrow \rightarrow$ SOT delay time	tsLOV	—		-80	80	ns	
Valid SIN $\rightarrow$ SCK $\uparrow$	tIVSH	—		100	—	ns	
SCK $\uparrow \rightarrow$ Valid SIN hold time	tSHIX	—		60	—	ns	
Serial clock "H" pulse width	tSHSL	—	External clock operation output pin: $C_L = 80 \text{ pF}$	4 tCyc	—	ns	
Serial clock "L" pulse width	tSLSH	—		4 tCyc	—	ns	
SCK $\downarrow \rightarrow$ SOT delay time	tsLOV	—		—	150	ns	
Valid SIN $\rightarrow$ SCK $\uparrow$	tIVSH	—		60	—	ns	
SCK $\uparrow \rightarrow$ Valid SIN hold time	tSHIX	—		60	—	ns	

Notes: • These AC characteristics assume the CLK synchronous mode.  
 •  $C_L$  is the value for load capacity applied to the pin under testing.  
 • tCyc is the machine cycle (in nanoseconds).

### • Internal shift clock mode

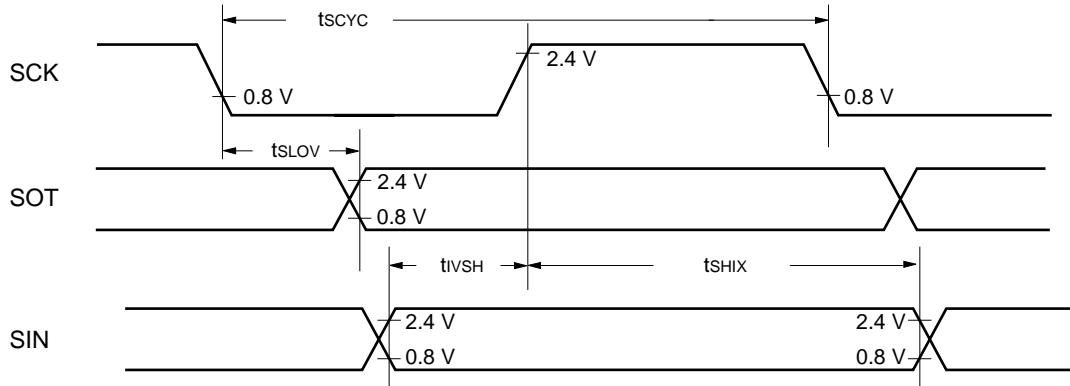

### • External shift clock mode

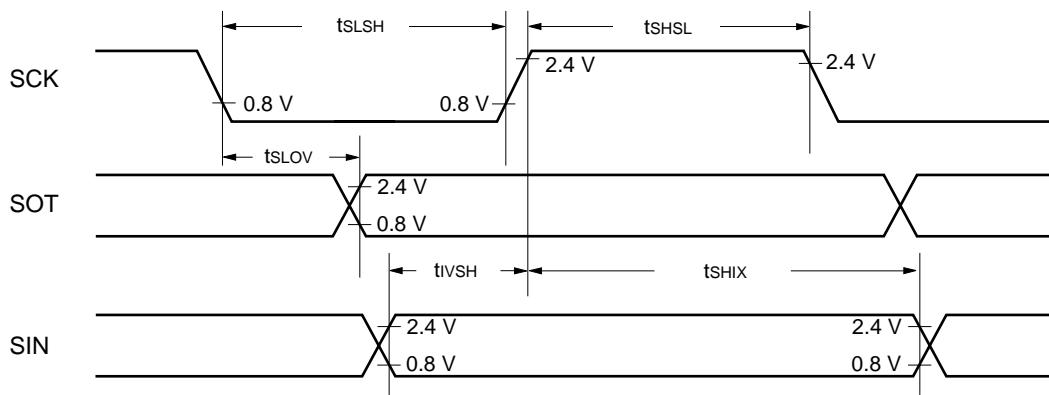

## (5) Extended Serial I/O Timing


( $V_{CC} = +5.0 \text{ V} \pm 5\%$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+70^\circ\text{C}$ )

Parameter	Symbol	Pin name	Condition	Value		Unit	Remarks
				Min.	Max.		
Serial clock cycle time	tscyc	—	Internal clock operation output pin: $C_L = 80 \text{ pF}$	8 t <sub>cyc</sub>	—	ns	
SCK $\downarrow \rightarrow$ SOT delay time	tslov	—		50	—	ns	
Valid SIN $\rightarrow$ SCK $\uparrow$	tivsh	—		1 t <sub>cyc</sub>	—	ns	
SCK $\uparrow \rightarrow$ Valid SIN hold time	tshix	—		1 t <sub>cyc</sub>	—	ns	
Serial clock "H" pulse width	tshsl	—	External clock operation output pin: $C_L = 80 \text{ pF}$	250	—	ns	External clock: 2 MHz max.
Serial clock "L" pulse width	tslsh	—		250	—	ns	
SCK $\downarrow \rightarrow$ SOT delay time	tslov	—		2 t <sub>cyc</sub>	—	ns	
Valid SIN $\rightarrow$ SCK $\uparrow$	tivsh	—		1 t <sub>cyc</sub>	—	ns	
SCK $\uparrow \rightarrow$ Valid SIN hold time	tshix	—		2 t <sub>cyc</sub>	—	ns	


Notes: •  $C_L$  is the value for load capacity applied to the pin under testing.

• t<sub>cyc</sub> is the machine cycle (in nanoseconds).

### • Internal shift clock mode

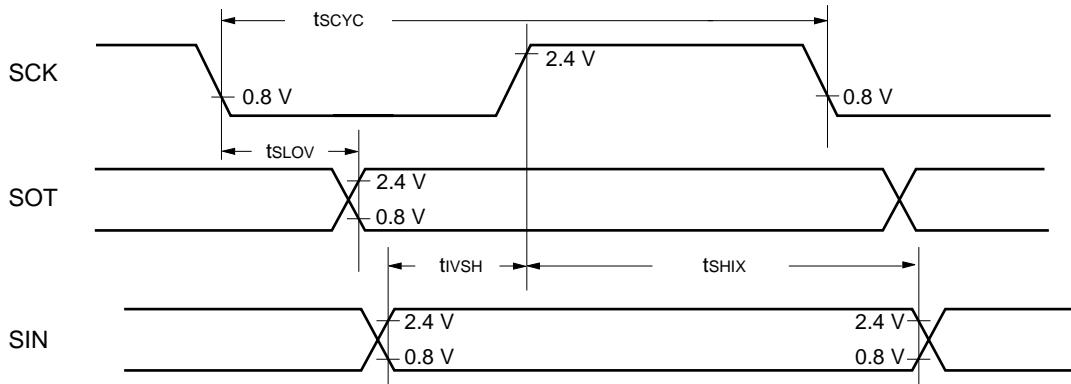

### • External shift clock mode

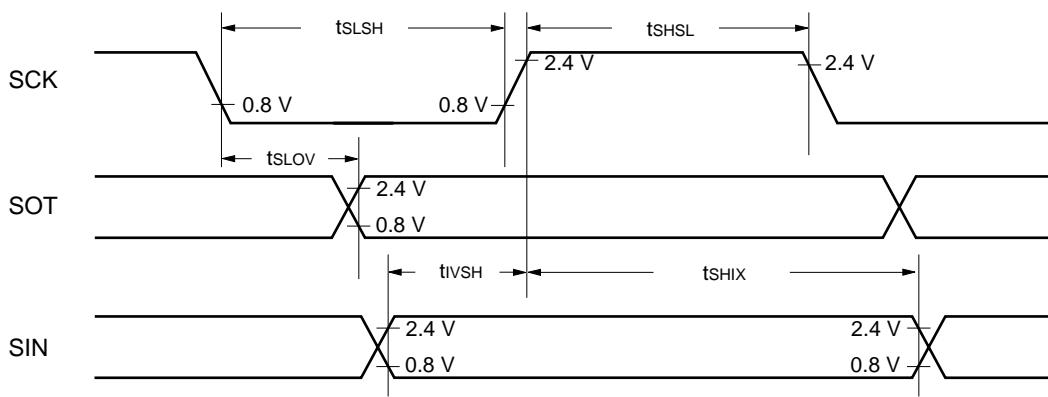

# MB90230 Series

## 5. A/D Converter Electrical Characteristics

( $AV_{CC} = V_{CC} = +5.0 \text{ V} \pm 5\%$ ,  $AV_{SS} = V_{SS} = 0.0 \text{ V}$ ,  $+3.0 \text{ V} \leq AVRH - AVRL$ ,  $T_A = -40^\circ\text{C}$  to  $+70^\circ\text{C}$ )


Parameter	Symbol	Pin name	Value			Unit	
			Min.	Typ.	Max.		
Resolution	—	—	—	10	10	bit	
Total error			—	—	$\pm 3.0$	LSB	
Linearity error			—	—	$\pm 2.0$	LSB	
Differential linearity error			—	—	$\pm 1.5$	LSB	
Zero transition voltage	$V_{OT}$	AN0 to AN7	-1.5	+0.5	+2.5	LSB	
Full-scale transition voltage	$V_{FST}$		AVRH -4.5	AVRH -1.5	AVRH +0.5	LSB	
Conversion time	—	$f_c = 16 \text{ MHz}$	5.00	—	—	$\mu\text{s}$	
Analog port input current	$I_{AIN}$	AN0 to AN7	—	—	10	$\mu\text{A}$	
Analog input voltage	—		AVRL	—	AVRH	V	
Reference voltage			AVRH	AVRL	AV <sub>CC</sub>	V	
Power supply current	$I_A$	AV <sub>CC</sub>	—	5	—	$\text{mA}$	
	$I_{AS}$		—	—	$5^*$	$\mu\text{A}$	
Reference voltage supply current	$I_R$	AVRH	—	200	—	$\mu\text{A}$	
	$I_{RS}$		—	—	$5^*$	$\mu\text{A}$	
Variation between channels	—	AN0 to AN7	—	—	4	LSB	

\* : Current applied in CPU stop mode with the A/D converter inactive ( $V_{CC} = AV_{CC} = AVRH = 5.5 \text{ V}$ ).

Notes: • The error becomes larger as  $|AVRH - AVRL|$  becomes smaller.

- Use the output impedance of the external circuit for analog input under the following conditions: External circuit output impedance < Approx.  $7 \text{ k}\Omega$
- If the output impedance the external circuit is too high, the analog voltage sampling time may be insufficient. (Sampling time =  $3.0 \mu\text{s}$  at a machine clock frequency of  $16 \text{ MHz}$ )

### • Analog Input Circuit Mode

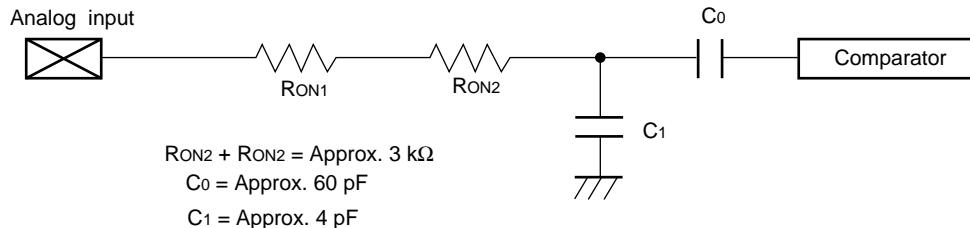

Note: The values shown here are reference values.

## 6. A/D Glossary

- Resolution

Analog changes that are identifiable with the A/D converter.

When the number of bits is 10, analog voltage can be divided into  $2^{10} = 1024$

- Total error


Difference between actual and logical values. This error is caused by a zero transition error, full-scale transition error, linearity error, differential linearity error, or by noise.

- Linearity error

The deviation of the straight line connecting the zero transition point ("00 0000 0000"  $\leftrightarrow$  "00 0000 0001") with the full-scale transition point ("11 1111 1111"  $\leftrightarrow$  "11 1111 1110") from actual conversion characteristics

- Differential linearity error

The deviation of input voltage needed to change the output code by 1 LSB from the theoretical value

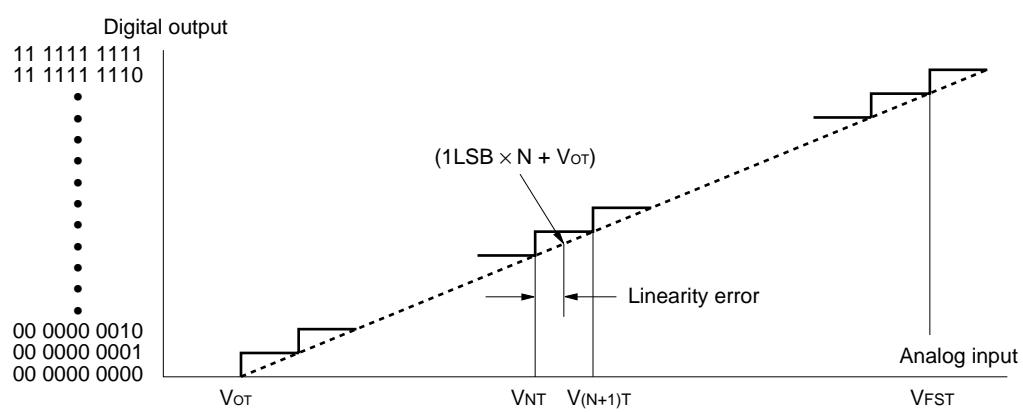

$$1\text{ LSB} = \frac{V_{FST} - V_{OT}}{1022}$$

$$\text{Linearity error} = \frac{V_{NT} - (1\text{ LSB} \times N + V_{OT})}{1\text{ LSB}} \text{ (LSB)}$$

$$\text{Differential linearity error} = \frac{V_{(N+1)T} - V_{NT}}{1\text{ LSB}} - 1 \text{ (LSB)}$$

# MB90230 Series

## 7. D/A Converter Electrical Characteristics

(AV<sub>CC</sub> = V<sub>CC</sub> = +5.0 V±5%, AV<sub>SS</sub> = V<sub>SS</sub> = 0.0 V, T<sub>A</sub> = -40°C to +70°C)

Parameter	Symbol	Pin name	Value			Unit
			Min.	Typ.	Max.	
Resolution	—	—	—	8	8	bit
Differential linearity error	—	—	—	—	±0.9	LSB
Conversion time	—	—	—	10*	20*	μs
Analog output impedance	—	—	—	28	—	KΩ

\*: A load capacity of 20 pF is assumed.

## 8. Serial E<sup>2</sup>PROM Interface Timing

### (1) E<sup>2</sup>PROM interface at an operation clock frequency of 1 MHz

( $V_{CC} = +5.0 \text{ V} \pm 5\%$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+70^\circ\text{C}$ )


Parameter	Symbol	Value			Unit	Remarks
		Min.	Typ.	Max.		
Operation cycle	tsk	1.0	—	—	μs	
Clock "H" time	tskh	0.4	0.5	—	μs	
Clock "L" time	tskl	0.4	0.5	—	μs	
ECS setup time	tcss	0.3	—	—	μs	
ECS hold time	tcsesh	0.0	—	—	μs	
EDO data decision time	t <sub>PD</sub>	0.3	—	—	μs	
EDO output hold time	t <sub>OH</sub>	0.5	—	—	μs	
EDI setup time	t <sub>DIS</sub>	0.0	—	—	μs	
EDI hold time	t <sub>DIH</sub>	0.4	—	—	μs	
READY ↑ → ECS ↓	t <sub>RCSEH</sub>	0.4	—	—	μs	
ECS "L" time	t <sub>CSL</sub>	0.8	1.0	—	μs	

### (2) E<sup>2</sup>PROM interface at an operation clock frequency of 2 MHz

( $V_{CC} = +5.0 \text{ V} \pm 5\%$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+70^\circ\text{C}$ )

Parameter	Symbol	Value			Unit	Remarks
		Min.	Typ.	Max.		
Operation cycle	tsk	0.5	—	—	μs	
Clock "H" time	tskh	0.2	0.25	—	μs	
Clock "L" time	tskl	0.2	0.25	—	μs	
ECS setup time	tcss	0.15	—	—	μs	
ECS hold time	tcsesh	0.0	—	—	μs	
EDO data decision time	t <sub>PD</sub>	0.15	—	—	μs	
EDO output hold time	t <sub>OH</sub>	0.25	—	—	μs	
EDI setup time	t <sub>DIS</sub>	0.0	—	—	μs	
EDI hold time	t <sub>DIH</sub>	0.2	—	—	μs	
READY ↑ → ECS ↓	t <sub>RCSEH</sub>	0.2	—	—	μs	
ECS "L" time	t <sub>CSL</sub>	0.4	0.5	—	μs	

# MB90230 Series

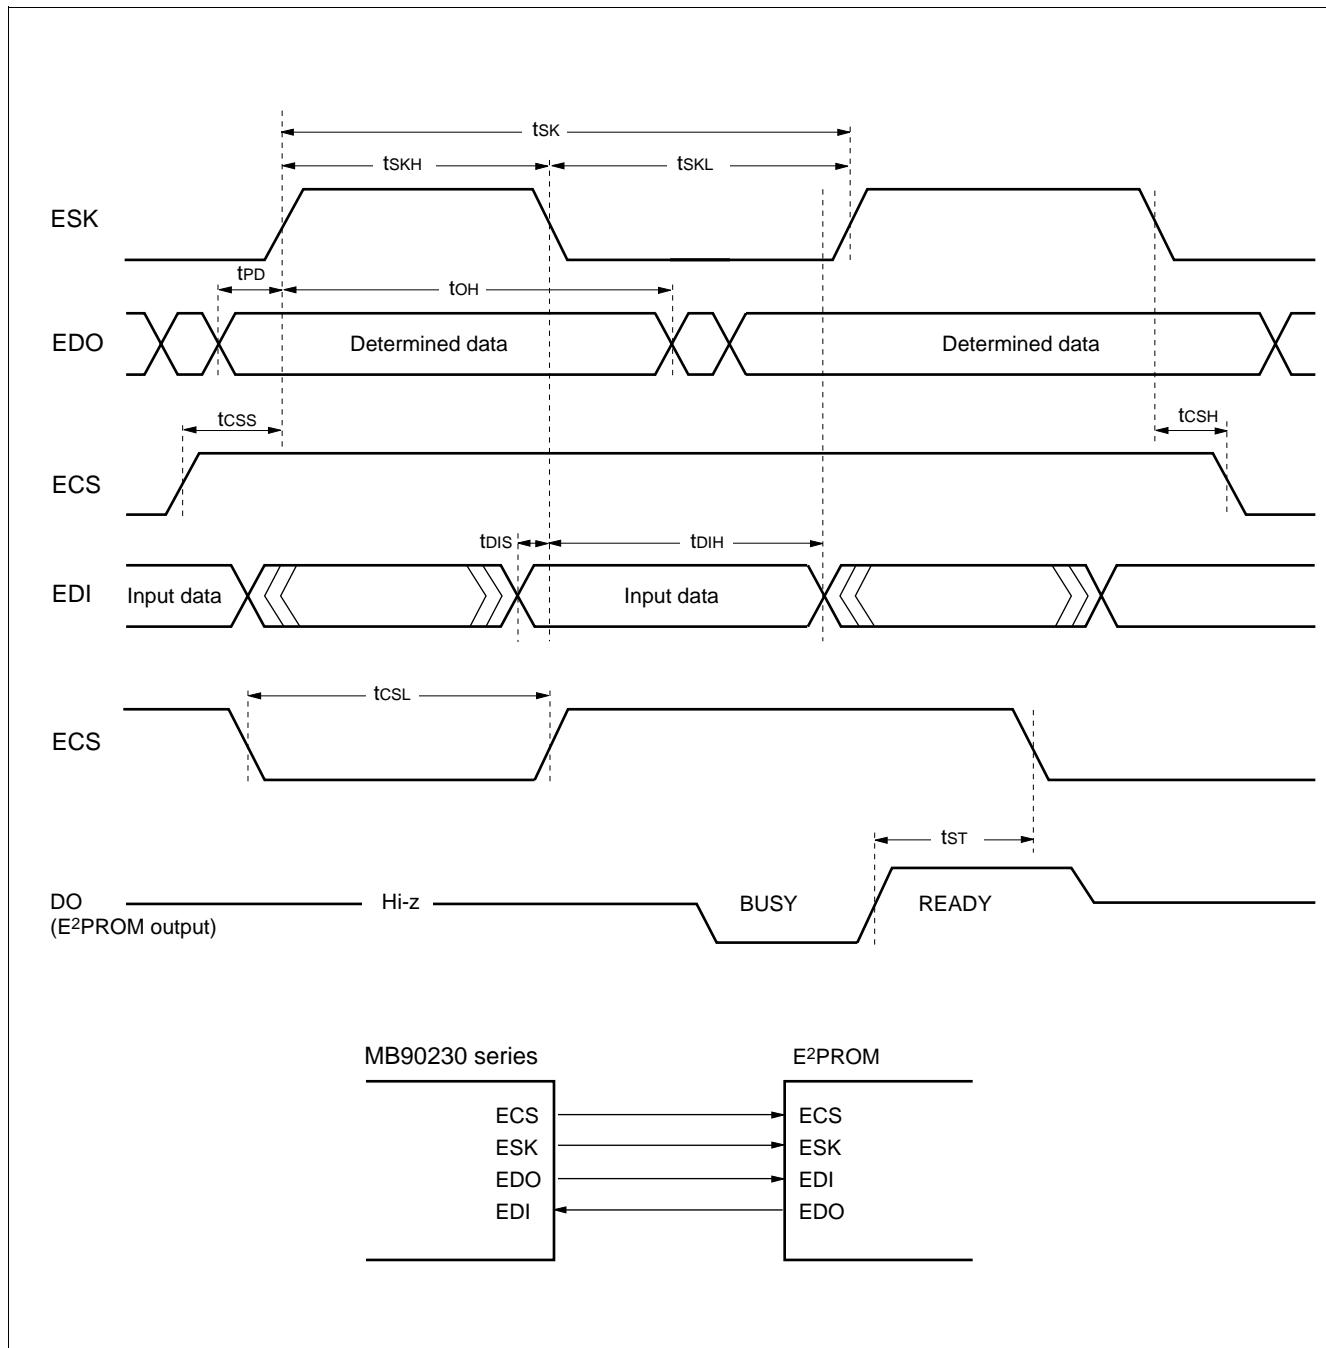

## ■ INSTRUCTIONS (412 INSTRUCTIONS)

Table 1 Description of Instruction Table

Item	Description
Mnemonic	Upper-case letters and symbols: Described directly in assembly code Lower-case letters: Replaced when described in assembly code Numbers after lower-case letters: Indicates the bit width within the code
#	Indicates the number of bytes
~	Indicates the number of cycles See Table 4 for details about meanings of letters in items.
B	Indicates the compensation value for calculating the number of actual cycles during execution of instruction. The number of actual cycles during execution of instruction is summed with the value in the "cycles" column.
Operation	Indicates operation of instruction.
LH	Indicates special operations involving the bits 15 through 08 of the accumulator. Z: Transfers "0" X: Extends before transferring —: No transfer
AH	Indicates special operations involving the high-order 16 bits in the accumulator. *: Transfers from AL to AH —: No transfer Z: Transfers $00_H$ to AH. X: Transfers $00_H$ or $FF_H$ to AH by extending AL
I	Indicates the status of each of the following flags: I (interrupt enable), S (stack), T (sticky bit), N (negative), Z (zero), V (overflow), and C (carry). *: Changes due to execution of instruction. —: No change.
S	S: Set by execution of instruction. R: Reset by execution of instruction.
T	
N	
Z	
V	
C	
RMW	Indicates whether the instruction is a read-modify-write instruction (a single instruction that reads data from memory, etc., processes the data, and then writes the result to memory.). *: Instruction is a read-modify-write instruction —: Instruction is not a read-modify-write instruction Note: Cannot be used for addresses that have different meanings depending on whether they are read or written.

# MB90230 Series

**Table 2 Explanation of Symbols in Table of Instructions**

Symbol	Description
A	32-bit accumulator The number of bits used varies according to the instruction. Byte: Low order 8 bits of AL Word: 16 bits of AL Long: 32 bits of AL, AH
AH	High-order 16 bits of A
AL	Low-order 16 bits of A
SP	Stack pointer (USP or SSP)
PC	Program counter
SPCU	Stack pointer upper limit register
SPCL	Stack pointer lower limit register
PCB	Program bank register
DTB	Data bank register
ADB	Additional data bank register
SSB	System stack bank register
USB	User stack bank register
SPB	Current stack bank register (SSB or USB)
DPR	Direct page register
brg1	DTB, ADB, SSB, USB, DPR, PCB, SPB
brg2	DTB, ADB, SSB, USB, DPR, SPB
Ri	R0, R1, R2, R3, R4, R5, R6, R7
RWi	RW0, RW1, RW2, RW3, RW4, RW5, RW6, RW7
RWj	RW0, RW1, RW2, RW3
RLi	RL0, RL1, RL2, RL3
dir addr16 addr24 addr24 0 to 15 addr24 16 to 23	Compact direct addressing Direct addressing Physical direct addressing Bits 0 to 15 of addr24 Bits 16 to 23 of addr24
io	I/O area (000000 <sub>H</sub> to 0000FF <sub>H</sub> )
#imm4 #imm8 #imm16 #imm32 ext (imm8)	4-bit immediate data 8-bit immediate data 16-bit immediate data 32-bit immediate data 16-bit data signed and extended from 8-bit immediate data
disp8 disp16	8-bit displacement 16-bit displacement
bp	Bit offset value
vct4 vct8	Vector number (0 to 15) Vector number (0 to 255)
( )b	Bit address
rel ear eam	Branch specification relative to PC Effective addressing (codes 00 to 07) Effective addressing (codes 08 to 1F)
rlst	Register list

**Table 3 Effective Address Fields**

Code	Notation	Address format	Number of bytes in address extension*
00	R0	Register direct	—
01	R1	“ea” corresponds to byte, word, and long-word types, starting from the left	—
02	R2	“ea” corresponds to byte, word, and long-word types, starting from the left	—
03	R3	“ea” corresponds to byte, word, and long-word types, starting from the left	—
04	R4	“ea” corresponds to byte, word, and long-word types, starting from the left	—
05	R5	“ea” corresponds to byte, word, and long-word types, starting from the left	—
06	R6	“ea” corresponds to byte, word, and long-word types, starting from the left	—
07	R7	“ea” corresponds to byte, word, and long-word types, starting from the left	—
08	@RW0	Register indirect	0
09	@RW1	Register indirect	0
0A	@RW2	Register indirect	0
0B	@RW3	Register indirect	0
0C	@RW0 +	Register indirect with post-increment	0
0D	@RW1 +	Register indirect with post-increment	0
0E	@RW2 +	Register indirect with post-increment	0
0F	@RW3 +	Register indirect with post-increment	0
10	@RW0 + disp8	Register indirect with 8-bit displacement	1
11	@RW1 + disp8	Register indirect with 8-bit displacement	1
12	@RW2 + disp8	Register indirect with 8-bit displacement	1
13	@RW3 + disp8	Register indirect with 8-bit displacement	1
14	@RW4 + disp8	Register indirect with 8-bit displacement	1
15	@RW5 + disp8	Register indirect with 8-bit displacement	1
16	@RW6 + disp8	Register indirect with 8-bit displacement	1
17	@RW7 + disp8	Register indirect with 8-bit displacement	1
18	@RW0 + disp16	Register indirect with 16-bit displacement	2
19	@RW1 + disp16	Register indirect with 16-bit displacement	2
1A	@RW2 + disp16	Register indirect with 16-bit displacement	2
1B	@RW3 + disp16	Register indirect with 16-bit displacement	2
1C	@RW0 + RW7	Register indirect with index	0
1D	@RW1 + RW7	Register indirect with index	0
1E	@PC + dip16	PC indirect with 16-bit displacement	2
1F	addr16	Direct address	2

\* : The number of bytes for address extension is indicated by the “+” symbol in the “#” (number of bytes) column in the Table of Instructions.

# MB90230 Series

**Table 4 Number of Execution Cycles for Each Form of Addressing**

Code	Operand	(a)*
		Number of execution cycles for each form of addressing
00 to 07	Ri RWi RLi	Listed in Table of Instructions
08 to 0B	@RWj	1
0C to 0F	@RWj +	4
10 to 17	@RWi + disp8	1
18 to 1B	@RWj + disp16	1
1C 1D 1E 1F	@RW0 + RW7 @RW1 + RW7 @PC + dip16 @addr16	2 2 2 1

\* : "(a)" is used in the "cycles" (number of cycles) column and column B (correction value) in the Table of Instructions.

**Table 5 Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles**

Operand	(b)*		(c)*		(d)*	
	byte	word	word	long	long	long
Internal register	+	0	+	0	+	0
Internal RAM even address	+	0	+	0	+	0
Internal RAM odd address	+	0	+	1	+	2
Even address not in internal RAM	+	1	+	1	+	2
Odd address not in internal RAM	+	1	+	3	+	6
External data bus (8 bits)	+	1	+	3	+	6

\* : "(b)", "(c)", and "(d)" are used in the "cycles" (number of cycles) column and column B (correction value) in the Table of Instructions.

Table 6 Transfer Instructions (Byte) [50 Instructions]

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
MOV A, dir	2	2	(b)	byte (A) ← (dir)	Z	*	—	—	—	*	*	—	—	—
MOV A, addr16	3	2	(b)	byte (A) ← (addr16)	Z	*	—	—	—	*	*	—	—	—
MOV A, Ri	1	1	0	byte (A) ← (Ri)	Z	*	—	—	—	*	*	—	—	—
MOV A, ear	2	1	0	byte (A) ← (ear)	Z	*	—	—	—	*	*	—	—	—
MOV A, eam	2+	2+(a)	(b)	byte (A) ← (eam)	Z	*	—	—	—	*	*	—	—	—
MOV A, io	2	2	(b)	byte (A) ← (io)	Z	*	—	—	—	*	*	—	—	—
MOV A, #imm8	2	2	0	byte (A) ← imm8	Z	*	—	—	—	*	*	—	—	—
MOV A, @A	2	2	(b)	byte (A) ← ((A))	Z	—	—	—	—	*	*	—	—	—
MOV A, @RLi+disp8	3	6	(b)	byte (A) ← ((RLi))+disp8	Z	*	—	—	—	*	*	—	—	—
MOV A, @SP+disp8	3	3	(b)	byte (A) ← ((SP))+disp8	Z	*	—	—	—	*	*	—	—	—
MOVPA, addr24	5	3	(b)	byte (A) ← (addr24)	Z	*	—	—	—	*	*	—	—	—
MOVPA, @A	2	2	(b)	byte (A) ← ((A))	Z	—	—	—	—	*	*	—	—	—
MOVN A, #imm4	1	1	0	byte (A) ← imm4	Z	*	—	—	—	R	*	—	—	—
MOVX A, dir	2	2	(b)	byte (A) ← (dir)	X	*	—	—	—	*	*	—	—	—
MOVX A, addr16	3	2	(b)	byte (A) ← (addr16)	X	*	—	—	—	*	*	—	—	—
MOVX A, Ri	2	1	0	byte (A) ← (Ri)	X	*	—	—	—	*	*	—	—	—
MOVX A, ear	2	1	0	byte (A) ← (ear)	X	*	—	—	—	*	*	—	—	—
MOVX A, eam	2+	2+(a)	(b)	byte (A) ← (eam)	X	*	—	—	—	*	*	—	—	—
MOVX A, io	2	2	(b)	byte (A) ← (io)	X	*	—	—	—	*	*	—	—	—
MOVX A, #imm8	2	2	0	byte (A) ← imm8	X	*	—	—	—	*	*	—	—	—
MOVX A, @A	2	2	(b)	byte (A) ← ((A))	X	—	—	—	—	*	*	—	—	—
MOVX A, @RWi+disp8	2	3	(b)	byte (A) ← ((RWi))+disp8	X	*	—	—	—	*	*	—	—	—
MOVX A, @RLi+disp8	3	6	(b)	byte (A) ← ((RLi))+disp8	X	*	—	—	—	*	*	—	—	—
MOVX A, @SP+disp8	3	3	(b)	byte (A) ← ((SP))+disp8	X	*	—	—	—	*	*	—	—	—
MOVPA, addr24	5	3	(b)	byte (A) ← (addr24)	X	*	—	—	—	*	*	—	—	—
MOVPA, @A	2	2	(b)	byte (A) ← ((A))	X	—	—	—	—	*	*	—	—	—
MOV dir, A	2	2	(b)	byte (dir) ← (A)	—	—	—	—	—	*	*	—	—	—
MOV addr16, A	3	2	(b)	byte (addr16) ← (A)	—	—	—	—	—	*	*	—	—	—
MOV Ri, A	1	1	0	byte (Ri) ← (A)	—	—	—	—	—	*	*	—	—	—
MOV ear, A	2	2	0	byte (ear) ← (A)	—	—	—	—	—	*	*	—	—	—
MOV eam, A	2+	2+(a)	(b)	byte (eam) ← (A)	—	—	—	—	—	*	*	—	—	—
MOV io, A	2	2	(b)	byte (io) ← (A)	—	—	—	—	—	*	*	—	—	—
MOV @RLi+disp8, A	3	6	(b)	byte ((RLi))+disp8 ← (A)	—	—	—	—	—	*	*	—	—	—
MOV @SP+disp8, A	3	3	(b)	byte ((SP))+disp8 ← (A)	—	—	—	—	—	*	*	—	—	—
MOVPA, addr24, A	5	3	(b)	byte (addr24) ← (A)	—	—	—	—	—	*	*	—	—	—
MOV Ri, ear	2	2	0	byte (Ri) ← (ear)	—	—	—	—	—	*	*	—	—	—
MOV Ri, eam	2+	3+(a)	(b)	byte (Ri) ← (eam)	—	—	—	—	—	*	*	—	—	—
MOVPA, @A, Ri	2	3	(b)	byte ((A)) ← (Ri)	—	—	—	—	—	*	*	—	—	—
MOV ear, Ri	2	3	0	byte (ear) ← (Ri)	—	—	—	—	—	*	*	—	—	—
MOV eam, Ri	2+	3+(a)	(b)	byte (eam) ← (Ri)	—	—	—	—	—	*	*	—	—	—
MOV Ri, #imm8	2	2	0	byte (Ri) ← imm8	—	—	—	—	—	*	*	—	—	—
MOV io, #imm8	3	3	(b)	byte (io) ← imm8	—	—	—	—	—	—	—	—	—	—
MOV dir, #imm8	3	3	(b)	byte (dir) ← imm8	—	—	—	—	—	—	—	—	—	—
MOV ear, #imm8	3	2	0	byte (ear) ← imm8	—	—	—	—	—	*	*	—	—	—
MOV eam, #imm8	3+	2+(a)	(b)	byte (eam) ← imm8	—	—	—	—	—	—	—	—	—	—
MOV @AL, AH	2	2	(b)	byte ((A)) ← (AH)	—	—	—	—	—	*	*	—	—	—
XCH A, ear	2	3	0	byte (A) ↔ (ear)	Z	—	—	—	—	—	—	—	—	—
XCH A, eam	2+	3+(a)	2×(b)	byte (A) ↔ (eam)	Z	—	—	—	—	—	—	—	—	—
XCH Ri, ear	2	4	0	byte (Ri) ↔ (ear)	—	—	—	—	—	—	—	—	—	—
XCH Ri, eam	2+	5+(a)	2×(b)	byte (Ri) ↔ (eam)	—	—	—	—	—	—	—	—	—	—

For an explanation of “(a)” and “(b)”, refer to Table 4, “Number of Execution Cycles for Each Form of Addressing,” and Table 5, “Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles.”

# MB90230 Series

**Table 7 Transfer Instructions (Word) [40 Instructions]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
MOVW A, dir	2	2	(c)	word (A) ← (dir)	—	*	—	—	—	*	*	—	—	—
MOVW A, addr16	3	2	(c)	word (A) ← (addr16)	—	*	—	—	—	*	*	—	—	—
MOVW A, SP	1	2	0	word (A) ← (SP)	—	*	—	—	—	*	*	—	—	—
MOVW A, RWi	1	1	0	word (A) ← (RWi)	—	*	—	—	—	*	*	—	—	—
MOVW A, ear	2	1	0	word (A) ← (ear)	—	*	—	—	—	*	*	—	—	—
MOVW A, eam	2+	2+(a)	(c)	word (A) ← (eam)	—	*	—	—	—	*	*	—	—	—
MOVW A, io	2	2	(c)	word (A) ← (io)	—	*	—	—	—	*	*	—	—	—
MOVW A, @A	2	2	(c)	word (A) ← ((A))	—	—	—	—	—	*	*	—	—	—
MOVW A, #imm16	3	2	0	word (A) ← imm16	—	*	—	—	—	*	*	—	—	—
MOVW A, @RWi+disp8	2	3	(c)	word (A) ← ((RWi) +disp8)	—	*	—	—	—	*	*	—	—	—
MOVW A, @RLi+disp8	3	6	(c)	word (A) ← ((RLi) +disp8)	—	*	—	—	—	*	*	—	—	—
MOVW A, @SP+disp8	3	3	(c)	word (A) ← ((SP) +disp8)	—	*	—	—	—	*	*	—	—	—
MOVW A, addr24	5	3	(c)	word (A) ← (addr24)	—	*	—	—	—	*	*	—	—	—
MOVW A, @A	2	2	(c)	word (A) ← ((A))	—	—	—	—	—	*	*	—	—	—
MOVW dir, A	2	2	(c)	word (dir) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW addr16, A	3	2	(c)	word (addr16) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW SP, # imm16	4	2	0	word (SP) ← imm16	—	—	—	—	—	*	*	—	—	—
MOVW SP, A	1	2	0	word (SP) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW RWi, A	1	1	0	word (RWi) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW ear, A	2	2	0	word (ear) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW eam, A	2+	2+(a)	(c)	word (eam) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW io, A	2	2	(c)	word (io) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW @RWi+disp8, A	2	3	(c)	word ((RWi) +disp8) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW @RLi+disp8, A	3	6	(c)	word ((RLi) +disp8) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW @SP+disp8, A	3	3	(c)	word ((SP) +disp8) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW @addr24, A	5	3	(c)	word (addr24) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVW @A, RWi	2	3	(c)	word ((A)) ← (RWi)	—	—	—	—	—	*	*	—	—	—
MOVW RWi, ear	2	2	0	word (RWi) ← (ear)	—	—	—	—	—	*	*	—	—	—
MOVW RWi, eam	2+	3+(a)	(c)	word (RWi) ← (eam)	—	—	—	—	—	*	*	—	—	—
MOVW ear, RWi	2	3	0	word (ear) ← (RWi)	—	—	—	—	—	*	*	—	—	—
MOVW eam, RWi	2+	3+(a)	(c)	word (eam) ← (RWi)	—	—	—	—	—	*	*	—	—	—
MOVW RWi, #imm16	3	2	0	word (RWi) ← imm16	—	—	—	—	—	*	*	—	—	—
MOVW io, #imm16	4	3	(c)	word (io) ← imm16	—	—	—	—	—	—	—	—	—	—
MOVW ear, #imm16	4	2	0	word (ear) ← imm16	—	—	—	—	—	*	*	—	—	—
MOVW eam, #imm16	4+	2+(a)	(c)	word (eam) ← imm16	—	—	—	—	—	—	—	—	—	—
MOVW @AL, AH	2	2	(c)	word ((A)) ← (AH)	—	—	—	—	—	*	*	—	—	—
XCHW A, ear	2	3	0	word (A) ↔ (ear)	—	—	—	—	—	—	—	—	—	—
XCHW A, eam	2+	3+(a)	2×(c)	word (A) ↔ (eam)	—	—	—	—	—	—	—	—	—	—
XCHW RWi, ear	2	4	0	word (RWi) ↔ (ear)	—	—	—	—	—	—	—	—	—	—
XCHW RWi, eam	2+	5+(a)	2×(c)	word (RWi) ↔ (eam)	—	—	—	—	—	—	—	—	—	—

Note: For an explanation of “(a)” and “(c)”, refer to Table 4, “Number of Execution Cycles for Each Form of Addressing,” and Table 5, “Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles.”

**Table 8 Transfer Instructions (Long Word) [11 Instructions]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
MOVL A, ear	2	1	0	long (A) ← (ear)	—	—	—	—	—	*	*	—	—	—
MOVL A, eam	2+	3+ (a)	(d)	long (A) ← (eam)	—	—	—	—	—	*	*	—	—	—
MOVL A, # imm32	5	3	0	long (A) ← imm32	—	—	—	—	—	*	*	—	—	—
MOVL A, @SP + disp8	3	4	(d)	long (A) ← ((SP) + disp8)	—	—	—	—	—	*	*	—	—	—
MOVPL A, addr24	5	4	(d)	long (A) ← (addr24)	—	—	—	—	—	*	*	—	—	—
MOVPL A, @A	2	3	(d)	long (A) ← ((A))	—	—	—	—	—	*	*	—	—	—
MOVPL @A, RLi	2	5	(d)	long ((A)) ← (RLi)	—	—	—	—	—	*	*	—	—	—
MOVL @SP + disp8, A	3	4	(d)	long ((SP) + disp8) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVPL addr24, A	5	4	(d)	long (addr24) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVL ear, A	2	2	0	long (ear) ← (A)	—	—	—	—	—	*	*	—	—	—
MOVL eam, A	2+	3+ (a)	(d)	long (eam) ← (A)	—	—	—	—	—	*	*	—	—	—

For an explanation of “(a)” and “(d)”, refer to Table 4, “Number of Execution Cycles for Each Form of Addressing,” and Table 5, “Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles.”

# MB90230 Series

**Table 9 Addition and Subtraction Instructions (Byte/Word/Long Word) [42 Instructions]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
ADD A, #imm8	2	2	0	byte (A) $\leftarrow$ (A) + imm8	Z	—	—	—	—	*	*	*	*	—
ADD A, dir	2	3	(b)	byte (A) $\leftarrow$ (A) + (dir)	Z	—	—	—	—	*	*	*	*	—
ADD A, ear	2	2	0	byte (A) $\leftarrow$ (A) + (ear)	Z	—	—	—	—	*	*	*	*	—
ADD A, eam	2+	3+ (a)	(b)	byte (A) $\leftarrow$ (A) + (eam)	Z	—	—	—	—	*	*	*	*	—
ADD ear, A	2	2	0	byte (ear) $\leftarrow$ (ear) + (A)	—	—	—	—	—	*	*	*	*	*
ADD eam, A	2+	3+ (a)	2× (b)	byte (eam) $\leftarrow$ (eam) + (A)	Z	—	—	—	—	*	*	*	*	*
ADDC A	1	2	0	byte (A) $\leftarrow$ (AH) + (AL) + (C)	Z	—	—	—	—	*	*	*	*	—
ADDC A, ear	2	2	0	byte (A) $\leftarrow$ (A) + (ear) + (C)	Z	—	—	—	—	*	*	*	*	—
ADDC A, eam	2+	3+ (a)	(b)	byte (A) $\leftarrow$ (A) + (eam) + (C)	Z	—	—	—	—	*	*	*	*	—
ADDC A	1	3	0	byte (A) $\leftarrow$ (AH) + (AL) + (C) (Decimal)	Z	—	—	—	—	*	*	*	*	—
SUB A, #imm8	2	2	0	byte (A) $\leftarrow$ (A) - imm8	Z	—	—	—	—	*	*	*	*	—
SUB A, dir	2	3	(b)	byte (A) $\leftarrow$ (A) - (dir)	Z	—	—	—	—	*	*	*	*	—
SUB A, ear	2	2	0	byte (A) $\leftarrow$ (A) - (ear)	Z	—	—	—	—	*	*	*	*	—
SUB A, eam	2+	3+ (a)	(b)	byte (A) $\leftarrow$ (A) - (eam)	Z	—	—	—	—	*	*	*	*	—
SUB ear, A	2	2	0	byte (ear) $\leftarrow$ (ear) - (A)	—	—	—	—	—	*	*	*	*	*
SUB eam, A	2+	3+ (a)	2× (b)	byte (eam) $\leftarrow$ (eam) - (A)	—	—	—	—	—	*	*	*	*	*
SUBC A	1	2	0	byte (A) $\leftarrow$ (AH) - (AL) - (C)	Z	—	—	—	—	*	*	*	*	—
SUBC A, ear	2	2	0	byte (A) $\leftarrow$ (A) - (ear) - (C)	Z	—	—	—	—	*	*	*	*	—
SUBC A, eam	2+	3+ (a)	(b)	byte (A) $\leftarrow$ (A) - (eam) - (C)	Z	—	—	—	—	*	*	*	*	—
SUBDC A	1	3	0	byte (A) $\leftarrow$ (AH) - (AL) - (C) (Decimal)	Z	—	—	—	—	*	*	*	*	—
ADDW A	1	2	0	word (A) $\leftarrow$ (AH) + (AL)	—	—	—	—	—	*	*	*	*	—
ADDW A, ear	2	2	0	word (A) $\leftarrow$ (A) + (ear)	—	—	—	—	—	*	*	*	*	—
ADDW A, eam	2+	3+ (a)	(c)	word (A) $\leftarrow$ (A) + (eam)	—	—	—	—	—	*	*	*	*	—
ADDW A, #imm16	3	2	0	word (A) $\leftarrow$ (A) + imm16	—	—	—	—	—	*	*	*	*	—
ADDW ear, A	2	2	0	word (ear) $\leftarrow$ (ear) + (A)	—	—	—	—	—	*	*	*	*	*
ADDW eam, A	2+	3+ (a)	2× (c)	word (eam) $\leftarrow$ (eam) + (A)	—	—	—	—	—	*	*	*	*	*
ADDCW A, ear	2	2	0	word (A) $\leftarrow$ (A) + (ear) + (C)	—	—	—	—	—	*	*	*	*	—
ADDCW A, eam	2+	3+ (a)	(c)	word (A) $\leftarrow$ (A) + (eam) + (C)	—	—	—	—	—	*	*	*	*	—
SUBW A	1	2	0	word (A) $\leftarrow$ (AH) - (AL)	—	—	—	—	—	*	*	*	*	—
SUBW A, ear	2	2	0	word (A) $\leftarrow$ (A) - (ear)	—	—	—	—	—	*	*	*	*	—
SUBW A, eam	2+	3+ (a)	(c)	word (A) $\leftarrow$ (A) - (eam)	—	—	—	—	—	*	*	*	*	—
SUBW A, #imm16	3	2	0	word (A) $\leftarrow$ (A) - imm16	—	—	—	—	—	*	*	*	*	—
SUBW ear, A	2	2	0	word (ear) $\leftarrow$ (ear) - (A)	—	—	—	—	—	*	*	*	*	*
SUBW eam, A	2+	3+ (a)	2× (c)	word (eam) $\leftarrow$ (eam) - (A)	—	—	—	—	—	*	*	*	*	*
SUBCW A, ear	2	2	0	word (A) $\leftarrow$ (A) - (ear) - (C)	—	—	—	—	—	*	*	*	*	—
SUBCW A, eam	2+	3+ (a)	(c)	word (A) $\leftarrow$ (A) - (eam) - (C)	—	—	—	—	—	*	*	*	*	—
ADDL A, ear	2	5	0	long (A) $\leftarrow$ (A) + (ear)	—	—	—	—	—	*	*	*	*	—
ADDL A, eam	2+	6+ (a)	(d)	long (A) $\leftarrow$ (A) + (eam)	—	—	—	—	—	*	*	*	*	—
ADDL A, #imm32	5	4	0	long (A) $\leftarrow$ (A) + imm32	—	—	—	—	—	*	*	*	*	—
SUBL A, ear	2	5	0	long (A) $\leftarrow$ (A) - (ear)	—	—	—	—	—	*	*	*	*	—
SUBL A, eam	2+	6+ (a)	(d)	long (A) $\leftarrow$ (A) - (eam)	—	—	—	—	—	*	*	*	*	—
SUBL A, #imm32	5	4	0	long (A) $\leftarrow$ (A) - imm32	—	—	—	—	—	*	*	*	*	—

For an explanation of "(a)", "(b)", "(c)" and "(d)", refer to Table 4, "Number of Execution Cycles for Each Form of Addressing," and Table 5, "Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles."

**Table 10 Increment and Decrement Instructions (Byte/Word/Long Word) [12 Instructions]**

Mnemonic		#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
INC	ear	2	2	0	byte (ear) $\leftarrow$ (ear) +1	—	—	—	—	—	*	*	*	—	*
INC	eam	2+	3+ (a)	2 $\times$ (b)	byte (eam) $\leftarrow$ (eam) +1	—	—	—	—	—	*	*	*	—	*
DEC	ear	2	2	0	byte (ear) $\leftarrow$ (ear) -1	—	—	—	—	—	*	*	*	—	*
DEC	eam	2+	3+ (a)	2 $\times$ (b)	byte (eam) $\leftarrow$ (eam) -1	—	—	—	—	—	*	*	*	—	*
INCW	ear	2	2	0	word (ear) $\leftarrow$ (ear) +1	—	—	—	—	—	*	*	*	—	*
INCW	eam	2+	3+ (a)	2 $\times$ (c)	word (eam) $\leftarrow$ (eam) +1	—	—	—	—	—	*	*	*	—	*
DECW	ear	2	2	0	word (ear) $\leftarrow$ (ear) -1	—	—	—	—	—	*	*	*	—	*
DECW	eam	2+	3+ (a)	2 $\times$ (c)	word (eam) $\leftarrow$ (eam) -1	—	—	—	—	—	*	*	*	—	*
INCL	ear	2	4	0	long (ear) $\leftarrow$ (ear) +1	—	—	—	—	—	*	*	*	—	*
INCL	eam	2+	5+ (a)	2 $\times$ (d)	long (eam) $\leftarrow$ (eam) +1	—	—	—	—	—	*	*	*	—	*
DECL	ear	2	4	0	long (ear) $\leftarrow$ (ear) -1	—	—	—	—	—	*	*	*	—	*
DECL	eam	2+	5+ (a)	2 $\times$ (d)	long (eam) $\leftarrow$ (eam) -1	—	—	—	—	—	*	*	*	—	*

For an explanation of “(a)”, “(b)”, “(c)” and “(d)”, refer to Table 4, “Number of Execution Cycles for Each Form of Addressing,” and Table 5, “Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles.”

**Table 11 Compare Instructions (Byte/Word/Long Word) [11 Instructions]**

Mnemonic		#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
CMP	A	1	2	0	byte (AH) - (AL)	—	—	—	—	—	*	*	*	*	—
CMP	A, ear	2	2	0	byte (A) - (ear)	—	—	—	—	—	*	*	*	*	—
CMP	A, eam	2+	2+ (a)	(b)	byte (A) - (eam)	—	—	—	—	—	*	*	*	*	—
CMP	A, #imm8	2	2	0	byte (A) - imm8	—	—	—	—	—	*	*	*	*	—
CMPW	A	1	2	0	word (AH) - (AL)	—	—	—	—	—	*	*	*	*	—
CMPW	A, ear	2	2	0	word (A) - (ear)	—	—	—	—	—	*	*	*	*	—
CMPW	A, eam	2+	2+ (a)	(c)	word (A) - (eam)	—	—	—	—	—	*	*	*	*	—
CMPW	A, #imm16	3	2	0	word (A) - imm16	—	—	—	—	—	*	*	*	*	—
CMPL	A, ear	2	3	0	long (A) - (ear)	—	—	—	—	—	*	*	*	*	—
CMPL	A, eam	2+	4+ (a)	(d)	long (A) - (eam)	—	—	—	—	—	*	*	*	*	—
CMPL	A, #imm32	5	3	0	long (A) - imm32	—	—	—	—	—	*	*	*	*	—

For an explanation of “(a)”, “(b)”, “(c)” and “(d)”, refer to Table 4, “Number of Execution Cycles for Each Form of Addressing,” and Table 5, “Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles.”

# MB90230 Series

**Table 12 Unsigned Multiplication and Division Instructions (Word/Long Word) [11 Instructions]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
DIVU	A	1	*1	0 word (AH) /byte (AL) Quotient → byte (AL) Remainder → byte (AH)	—	—	—	—	—	—	—	*	*	—
DIVU	A, ear	2	*2	0 word (A)/byte (ear) Quotient → byte (A) Remainder → byte (ear)	—	—	—	—	—	—	—	*	*	—
DIVU	A, eam	2+	*3	*6 word (A)/byte (eam) Quotient → byte (A) Remainder → byte (eam)	—	—	—	—	—	—	—	*	*	—
DIVUW	A, ear	2	*4	0 long (A)/word (ear) Quotient → word (A) Remainder → word (ear)	—	—	—	—	—	—	—	*	*	—
DIVUW	A, eam	2+	*5	*7 long (A)/word (eam) Quotient → word (A) Remainder → word (eam)	—	—	—	—	—	—	—	*	*	—
MULU	A	1	*8	0 byte (AH) × byte (AL) → word (A)	—	—	—	—	—	—	—	—	—	—
MULU	A, ear	2	*9	0 byte (A) × byte (ear) → word (A)	—	—	—	—	—	—	—	—	—	—
MULU	A, eam	2+	*10	(b) byte (A) × byte (eam) → word (A)	—	—	—	—	—	—	—	—	—	—
MULUW	A	1	*11	0 word (AH) × word (AL) → long (A)	—	—	—	—	—	—	—	—	—	—
MULUW	A, ear	2	*12	0 word (A) × word (ear) → long (A)	—	—	—	—	—	—	—	—	—	—
MULUW	A, eam	2+	*13	(c) word (A) × word (eam) → long (A)	—	—	—	—	—	—	—	—	—	—

For an explanation of “(b)” and “(c), refer to Table 5, “Correction Values for Number of Cycle Used to Calculate Number of Actual Cycles.”

\*1: 3 when dividing into zero, 6 when an overflow occurs, and 14 normally.

\*2: 3 when dividing into zero, 5 when an overflow occurs, and 13 normally.

\*3: 5 + (a) when dividing into zero, 7 + (a) when an overflow occurs, and 17 + (a) normally.

\*4: 3 when dividing into zero, 5 when an overflow occurs, and 21 normally.

\*5: 4 + (a) when dividing into zero, 7 + (a) when an overflow occurs, and 25 + (a) normally.

\*6: (b) when dividing into zero or when an overflow occurs, and 2 × (b) normally.

\*7: (c) when dividing into zero or when an overflow occurs, and 2 × (c) normally.

\*8: 3 when byte (AH) is zero, and 7 when byte (AH) is not 0.

\*9: 3 when byte (ear) is zero, and 7 when byte (ear) is not 0.

\*10: 4 + (a) when byte (eam) is zero, and 8 + (a) when byte (eam) is not 0.

\*11: 3 when word (AH) is zero, and 11 when word (AH) is not 0.

\*12: 3 when word (ear) is zero, and 11 when word (ear) is not 0.

\*13: 4 + (a) when word (eam) is zero, and 12 + (a) when word (eam) is not 0.

Table 13 Signed Multiplication and Division Instructions (Word/Long Word) [11 Instructions]

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
DIV A	2	*1	0	word (AH) /byte (AL) Quotient → byte (AL) Remainder → byte (AH)	Z	—	—	—	—	—	—	*	*	—
DIV A, ear	2	*2	0	word (A)/byte (ear) Quotient → byte (A) Remainder → byte (ear)	Z	—	—	—	—	—	—	*	*	—
DIV A, eam	2+	*3	*6	word (A)/byte (eam) Quotient → byte (A) Remainder → byte (eam)	Z	—	—	—	—	—	—	*	*	—
DIVW A, ear	2	*4	0	long (A)/word (ear) Quotient → word (A) Remainder → word (ear)	—	—	—	—	—	—	—	*	*	—
DIVW A, eam	2+	*5	*7	long (A)/word (eam) Quotient → word (A) Remainder → word (eam)	—	—	—	—	—	—	—	*	*	—
MUL A	2	*8	0	byte (AH) × byte (AL) → word (A)	—	—	—	—	—	—	—	—	—	—
MUL A, ear	2	*9	0	byte (A) × byte (ear) → word (A)	—	—	—	—	—	—	—	—	—	—
MUL A, eam	2+	*10	(b)	byte (A) × byte (eam) → word (A)	—	—	—	—	—	—	—	—	—	—
MULW A	2	*11	0	word (AH) × word (AL) → long (A)	—	—	—	—	—	—	—	—	—	—
MULW A, ear	2	*12	0	word (A) × word (ear) → long (A)	—	—	—	—	—	—	—	—	—	—
MULW A, eam	2+	*13	(b)	word (A) × word (eam) → long (A)	—	—	—	—	—	—	—	—	—	—

For an explanation of "(b)" and "(c)", refer to Table 5, "Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles."

\*1: 3 when dividing into zero, 8 or 18 when an overflow occurs, and 18 normally.

\*2: 3 when dividing into zero, 10 or 21 when an overflow occurs, and 22 normally.

\*3: 4 + (a) when dividing into zero, 11 + (a) or 22 + (a) when an overflow occurs, and 23 + (a) normally.

\*4: When the dividend is positive: 4 when dividing into zero, 10 or 29 when an overflow occurs, and 30 normally.

When the dividend is negative: 4 when dividing into zero, 11 or 30 when an overflow occurs, and 31 normally.

\*5: When the dividend is positive: 4 + (a) when dividing into zero, 11 + (a) or 30 + (a) when an overflow occurs, and 31 + (a) normally.

When the dividend is negative: 4 + (a) when dividing into zero, 12 + (a) or 31 + (a) when an overflow occurs, and 32 + (a) normally.

\*6: (b) when dividing into zero or when an overflow occurs, and 2 × (b) normally.

\*7: (c) when dividing into zero or when an overflow occurs, and 2 × (c) normally.

\*8: 3 when byte (AH) is zero, 12 when the result is positive, and 13 when the result is negative.

\*9: 3 when byte (ear) is zero, 12 when the result is positive, and 13 when the result is negative.

\*10: 4 + (a) when byte (eam) is zero, 13 + (a) when the result is positive, and 14 + (a) when the result is negative.

\*11: 3 when word (AH) is zero, 12 when the result is positive, and 13 when the result is negative.

\*12: 3 when word (ear) is zero, 16 when the result is positive, and 19 when the result is negative.

\*13: 4 + (a) when word (eam) is zero, 17 + (a) when the result is positive, and 20 + (a) when the result is negative.

Note: Which of the two values given for the number of execution cycles applies when an overflow error occurs in a DIV or DIVW instruction depends on whether the overflow was detected before or after the operation.

# MB90230 Series

Table 14 Logical 1 Instructions (Byte, Word) [39 Instructions]

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
AND A, #imm8	2	2	0	byte (A) ← (A) and imm8	—	—	—	—	—	*	*	R	—	—
AND A, ear	2	2	0	byte (A) ← (A) and (ear)	—	—	—	—	—	*	*	R	—	—
AND A, eam	2+	3+ (a)	(b)	byte (A) ← (A) and (eam)	—	—	—	—	—	*	*	R	—	—
AND ear, A	2	3	0	byte (ear) ← (ear) and (A)	—	—	—	—	—	*	*	R	—	*
AND eam, A	2+	3+ (a)	2× (b)	byte (eam) ← (eam) and (A)	—	—	—	—	—	*	*	R	—	*
OR A, #imm8	2	2	0	byte (A) ← (A) or imm8	—	—	—	—	—	*	*	R	—	—
OR A, ear	2	2	0	byte (A) ← (A) or (ear)	—	—	—	—	—	*	*	R	—	—
OR A, eam	2+	3+ (a)	(b)	byte (A) ← (A) or (eam)	—	—	—	—	—	*	*	R	—	—
OR ear, A	2	3	0	byte (ear) ← (ear) or (A)	—	—	—	—	—	*	*	R	—	*
OR eam, A	2+	3+ (a)	2× (b)	byte (eam) ← (eam) or (A)	—	—	—	—	—	*	*	R	—	*
XOR A, #imm8	2	2	0	byte (A) ← (A) xor imm8	—	—	—	—	—	*	*	R	—	—
XOR A, ear	2	2	0	byte (A) ← (A) xor (ear)	—	—	—	—	—	*	*	R	—	—
XOR A, eam	2+	3+ (a)	(b)	byte (A) ← (A) xor (eam)	—	—	—	—	—	*	*	R	—	—
XOR ear, A	2	3	0	byte (ear) ← (ear) xor (A)	—	—	—	—	—	*	*	R	—	*
XOR eam, A	2+	3+ (a)	2× (b)	byte (eam) ← (eam) xor (A)	—	—	—	—	—	*	*	R	—	*
NOT A	1	2	0	byte (A) ← not (A)	—	—	—	—	—	*	*	R	—	—
NOT ear	2	2	0	byte (ear) ← not (ear)	—	—	—	—	—	*	*	R	—	*
NOT eam	2+	3+ (a)	2× (b)	byte (eam) ← not (eam)	—	—	—	—	—	*	*	R	—	*
ANDW A	1	2	0	word (A) ← (AH) and (A)	—	—	—	—	—	*	*	R	—	—
ANDW A, #imm16	3	2	0	word (A) ← (A) and imm16	—	—	—	—	—	*	*	R	—	—
ANDW A, ear	2	2	0	word (A) ← (A) and (ear)	—	—	—	—	—	*	*	R	—	—
ANDW A, eam	2+	3+ (a)	(c)	word (A) ← (A) and (eam)	—	—	—	—	—	*	*	R	—	—
ANDW ear, A	2	3	0	word (ear) ← (ear) and (A)	—	—	—	—	—	*	*	R	—	*
ANDW eam, A	2+	3+ (a)	2× (c)	word (eam) ← (eam) and (A)	—	—	—	—	—	*	*	R	—	*
ORW A	1	2	0	word (A) ← (AH) or (A)	—	—	—	—	—	*	*	R	—	—
ORW A, #imm16	3	2	0	word (A) ← (A) or imm16	—	—	—	—	—	*	*	R	—	—
ORW A, ear	2	2	0	word (A) ← (A) or (ear)	—	—	—	—	—	*	*	R	—	—
ORW A, eam	2+	3+ (a)	(c)	word (A) ← (A) or (eam)	—	—	—	—	—	*	*	R	—	—
ORW ear, A	2	3	0	word (ear) ← (ear) or (A)	—	—	—	—	—	*	*	R	—	*
ORW eam, A	2+	3+ (a)	2× (c)	word (eam) ← (eam) or (A)	—	—	—	—	—	*	*	R	—	*
XORW A	1	2	0	word (A) ← (AH) xor (A)	—	—	—	—	—	*	*	R	—	—
XORW A, #imm16	3	2	0	word (A) ← (A) xor imm16	—	—	—	—	—	*	*	R	—	—
XORW A, ear	2	2	0	word (A) ← (A) xor (ear)	—	—	—	—	—	*	*	R	—	—
XORW A, eam	2+	3+ (a)	(c)	word (A) ← (A) xor (eam)	—	—	—	—	—	*	*	R	—	—
XORW ear, A	2	3	0	word (ear) ← (ear) xor (A)	—	—	—	—	—	*	*	R	—	*
XORW eam, A	2+	3+ (a)	2× (c)	word (eam) ← (eam) xor (A)	—	—	—	—	—	*	*	R	—	*
NOTW A	1	2	0	word (A) ← not (A)	—	—	—	—	—	*	*	R	—	—
NOTW ear	2	2	0	word (ear) ← not (ear)	—	—	—	—	—	*	*	R	—	*
NOTW eam	2+	3+ (a)	2× (c)	word (eam) ← not (eam)	—	—	—	—	—	*	*	R	—	*

For an explanation of “(a)”, “(b)”, “(c)” and “(d)”, refer to Table 4, “Number of Execution Cycles for Each Form of Addressing,” and Table 5, “Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles.”

**Table 15 Logical 2 Instructions (Long Word) [6 Instructions]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
ANDL A, ear	2	5	0	long (A) $\leftarrow$ (A) and (ear)	—	—	—	—	—	*	*	R	—	—
ANDL A, eam	2+	6+ (a)	(d)	long (A) $\leftarrow$ (A) and (eam)	—	—	—	—	—	*	*	R	—	—
ORL A, ear	2	5	0	long (A) $\leftarrow$ (A) or (ear)	—	—	—	—	—	*	*	R	—	—
ORL A, eam	2+	6+ (a)	(d)	long (A) $\leftarrow$ (A) or (eam)	—	—	—	—	—	*	*	R	—	—
XORL A, ear	2	5	0	long (A) $\leftarrow$ (A) xor (ear)	—	—	—	—	—	*	*	R	—	—
XORL A, eam	2+	6+ (a)	(d)	long (A) $\leftarrow$ (A) xor (eam)	—	—	—	—	—	*	*	R	—	—

For an explanation of “(a)” and “(d)”, refer to Table 4, “Number of Execution Cycles for Each Form of Addressing,” and Table 5, “Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles.”

**Table 16 Sign Inversion Instructions (Byte/Word) [6 Instructions]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
NEG A	1	2	0	byte (A) $\leftarrow$ 0 – (A)	X	—	—	—	—	*	*	*	*	—
NEG ear	2	2	0	byte (ear) $\leftarrow$ 0 – (ear)	—	—	—	—	—	*	*	*	*	*
NEG eam	2+	3+ (a)	2× (b)	byte (eam) $\leftarrow$ 0 – (eam)	—	—	—	—	—	*	*	*	*	*
NEGW A	1	2	0	word (A) $\leftarrow$ 0 – (A)	—	—	—	—	—	*	*	*	*	—
NEGW ear	2	2	0	word (ear) $\leftarrow$ 0 – (ear)	—	—	—	—	—	*	*	*	*	*
NEGW eam	2+	3+ (a)	2× (c)	word (eam) $\leftarrow$ 0 – (eam)	—	—	—	—	—	*	*	*	*	*

For an explanation of “(a)”, “(b)” and “(c)” and refer to Table 4, “Number of Execution Cycles for Each Form of Addressing,” and Table 5, “Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles.”

**Table 17 Absolute Value Instructions (Byte/Word/Long Word) [3 Instructions]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
ABS A	2	2	0	byte (A) $\leftarrow$ absolute value (A)	Z	—	—	—	—	*	*	*	—	—
ABSW A	2	2	0	word (A) $\leftarrow$ absolute value (A)	—	—	—	—	—	*	*	*	—	—
ABSL A	2	4	0	long (A) $\leftarrow$ absolute value (A)	—	—	—	—	—	*	*	*	—	—

**Table 18 Normalize Instructions (Long Word) [1 Instruction]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
NRML A, R0	2	*	0	long (A) $\leftarrow$ Shifts to the position at which “1” was set first byte (R0) $\leftarrow$ current shift count	—	—	—	—	*	—	—	—	—	—

\* : 5 when the contents of the accumulator are all zeroes, 5 + (R0) in all other cases.

# MB90230 Series

Table 19 Shift Instructions (Byte/Word/Long Word) [27 Instructions]

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
RORC A	2	2	0	byte (A) $\leftarrow$ Right rotation with carry	—	—	—	—	—	*	*	—	*	—
ROLC A	2	2	0	byte (A) $\leftarrow$ Left rotation with carry	—	—	—	—	—	*	*	—	*	—
RORC ear	2	2	0	byte (ear) $\leftarrow$ Right rotation with carry	—	—	—	—	—	*	*	—	*	*
RORC eam	2+	3+ (a)	2x (b)	byte (eam) $\leftarrow$ Right rotation with carry	—	—	—	—	—	*	*	—	*	*
ROLC ear	2	2	0	byte (ear) $\leftarrow$ Left rotation with carry	—	—	—	—	—	*	*	—	*	*
ROLC eam	2+	3+ (a)	2x (b)	byte (eam) $\leftarrow$ Left rotation with carry	—	—	—	—	—	*	*	—	*	*
ASR A, R0	2	*1	0	byte (A) $\leftarrow$ Arithmetic right barrel shift (A, R0)	—	—	—	—	*	*	*	—	*	—
LSR A, R0	2	*1	0	byte (A) $\leftarrow$ Logical right barrel shift (A, R0)	—	—	—	—	*	*	*	—	*	—
LSL A, R0	2	*1	0	byte (A) $\leftarrow$ Logical left barrel shift (A, R0)	—	—	—	—	—	*	*	—	*	—
ASR A, #imm8	3	*3	0	byte (A) $\leftarrow$ Arithmetic right barrel shift (A, imm8)	—	—	—	—	*	*	*	—	*	—
LSR A, #imm8	3	*3	0	byte (A) $\leftarrow$ Logical right barrel shift (A, imm8)	—	—	—	—	*	*	*	—	*	—
LSL A, #imm8	3	*3	0	byte (A) $\leftarrow$ Logical left barrel shift (A, imm8)	—	—	—	—	*	*	*	—	*	—
ASRW A	1	2	0	word (A) $\leftarrow$ Arithmetic right shift (A, 1 bit)	—	—	—	—	*	*	*	—	*	—
LSRW A/SHRW A	1	2	0	word (A) $\leftarrow$ Logical right shift (A, 1 bit)	—	—	—	—	*	R	*	—	*	—
LSLW A/SHLW A	1	2	0	word (A) $\leftarrow$ Logical left shift (A, 1 bit)	—	—	—	—	*	*	*	—	*	—
ASRW A, R0	2	*1	0	word (A) $\leftarrow$ Arithmetic right barrel shift (A, R0)	—	—	—	—	*	*	*	—	*	—
LSRW A, R0	2	*1	0	word (A) $\leftarrow$ Logical right barrel shift (A, R0)	—	—	—	—	*	*	*	—	*	—
LSLW A, R0	2	*1	0	word (A) $\leftarrow$ Logical left barrel shift (A, R0)	—	—	—	—	*	*	*	—	*	—
ASRW A, #imm8	3	*3	0	word (A) $\leftarrow$ Arithmetic right barrel shift (A, imm8)	—	—	—	—	*	*	*	—	*	—
LSRW A, #imm8	3	*3	0	word (A) $\leftarrow$ Logical right barrel shift (A, imm8)	—	—	—	—	*	*	*	—	*	—
LSLW A, #imm8	3	*3	0	word (A) $\leftarrow$ Logical left barrel shift (A, imm8)	—	—	—	—	*	*	*	—	*	—
ASRL A, R0	2	*2	0	long (A) $\leftarrow$ Arithmetic right shift (A, R0)	—	—	—	—	*	*	*	—	*	—
LSRL A, R0	2	*2	0	long (A) $\leftarrow$ Logical right barrel shift (A, R0)	—	—	—	—	*	*	*	—	*	—
LSLL A, R0	2	*2	0	long (A) $\leftarrow$ Logical left barrel shift (A, R0)	—	—	—	—	*	*	*	—	*	—
ASRL A, #imm8	3	*4	0	long (A) $\leftarrow$ Arithmetic right shift (A, imm8)	—	—	—	—	*	*	*	—	*	—
LSRL A, #imm8	3	*4	0	long (A) $\leftarrow$ Logical right barrel shift (A, imm8)	—	—	—	—	*	*	*	—	*	—
LSLL A, #imm8	3	*4	0	long (A) $\leftarrow$ Logical left barrel shift (A, imm8)	—	—	—	—	*	*	*	—	*	—

For an explanation of “(a)” and “(b)”, refer to Table 4, “Number of Execution Cycles for Each Form of Addressing,” and Table 5, “Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles.”

\*1: 3 when R0 is 0, 3 + (R0) in all other cases.

\*2: 3 when R0 is 0, 4 + (R0) in all other cases.

\*3: 3 when imm8 is 0, 3 + (imm8) in all other cases.

\*4: 3 when imm8 is 0, 4 + (imm8) in all other cases.

Table 20 Branch 1 Instructions [31 Instructions]

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
BZ/BEQ rel	2	*1	0	Branch when (Z) = 1	—	—	—	—	—	—	—	—	—	—
BNZ/BNE rel	2	*1	0	Branch when (Z) = 0	—	—	—	—	—	—	—	—	—	—
BC/BLO rel	2	*1	0	Branch when (C) = 1	—	—	—	—	—	—	—	—	—	—
BNC/BHS rel	2	*1	0	Branch when (C) = 0	—	—	—	—	—	—	—	—	—	—
BN rel	2	*1	0	Branch when (N) = 1	—	—	—	—	—	—	—	—	—	—
BP rel	2	*1	0	Branch when (N) = 0	—	—	—	—	—	—	—	—	—	—
BV rel	2	*1	0	Branch when (V) = 1	—	—	—	—	—	—	—	—	—	—
BNV rel	2	*1	0	Branch when (V) = 0	—	—	—	—	—	—	—	—	—	—
BT rel	2	*1	0	Branch when (T) = 1	—	—	—	—	—	—	—	—	—	—
BNT rel	2	*1	0	Branch when (T) = 0	—	—	—	—	—	—	—	—	—	—
BLT rel	2	*1	0	Branch when (V) xor (N) = 1	—	—	—	—	—	—	—	—	—	—
BGE rel	2	*1	0	Branch when (V) xor (N) = 0	—	—	—	—	—	—	—	—	—	—
BLE rel	2	*1	0	( (V) xor (N) ) or (Z) = 1	—	—	—	—	—	—	—	—	—	—
BGT rel	2	*1	0	( (V) xor (N) ) or (Z) = 0	—	—	—	—	—	—	—	—	—	—
BLS rel	2	*1	0	Branch when (C) or (Z) = 1	—	—	—	—	—	—	—	—	—	—
BHI rel	2	*1	0	Branch when (C) or (Z) = 0	—	—	—	—	—	—	—	—	—	—
BRA rel	2	*1	0	Branch unconditionally	—	—	—	—	—	—	—	—	—	—
JMP @A	1	2	0	word (PC) $\leftarrow$ (A)	—	—	—	—	—	—	—	—	—	—
JMP addr16	3	2	0	word (PC) $\leftarrow$ addr16	—	—	—	—	—	—	—	—	—	—
JMP @ear	2	3	0	word (PC) $\leftarrow$ (ear)	—	—	—	—	—	—	—	—	—	—
JMP @eam	2+	4+ (a)	(c)	word (PC) $\leftarrow$ (eam)	—	—	—	—	—	—	—	—	—	—
JMPP @ear * <sup>3</sup>	2	3	0	word (PC) $\leftarrow$ (ear), (PCB) $\leftarrow$ (ear+2)	—	—	—	—	—	—	—	—	—	—
JMPP @eam * <sup>3</sup>	2+	4+ (a)	(d)	word (PC) $\leftarrow$ (eam), (PCB) $\leftarrow$ (eam+2)	—	—	—	—	—	—	—	—	—	—
JMPP addr24	4	3	0	word (PC) $\leftarrow$ ad24 0 to 15 (PCB) $\leftarrow$ ad24 16 to 23	—	—	—	—	—	—	—	—	—	—
CALL @ear * <sup>4</sup>	2	4	(c)	word (PC) $\leftarrow$ (ear)	—	—	—	—	—	—	—	—	—	—
CALL @eam * <sup>4</sup>	2+	5+ (a)	2×(c)	word (PC) $\leftarrow$ (eam)	—	—	—	—	—	—	—	—	—	—
CALL addr16 * <sup>5</sup>	3	5	(c)	word (PC) $\leftarrow$ addr16	—	—	—	—	—	—	—	—	—	—
CALLV #vct4 * <sup>5</sup>	1	5	2×(c)	Vector call linstuction	—	—	—	—	—	—	—	—	—	—
CALLP @ear * <sup>6</sup>	2	7	2×(c)	word (PC) $\leftarrow$ (ear) 0 to 15, (PCB) $\leftarrow$ (ear) 16 to 23	—	—	—	—	—	—	—	—	—	—
CALLP @eam * <sup>6</sup>	2+	8+ (a)	* <sup>2</sup>	word (PC) $\leftarrow$ (eam) 0 to 15, (PCB) $\leftarrow$ (eam) 16 to 23	—	—	—	—	—	—	—	—	—	—
CALLP addr24 * <sup>7</sup>	4	7	2×(c)	word (PC) $\leftarrow$ addr 0 to 15, (PCB) $\leftarrow$ addr 16 to 23	—	—	—	—	—	—	—	—	—	—

For an explanation of "(a)", "(c)" and "(d)", refer to Table 4, "Number of Execution Cycles for Each Form of Addressing," and Table 5, "Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles."

\*1: 3 when branching, 2 when not branching.

\*2:  $3 \times (c) + (b)$

\*3: Read (word) branch address.

\*4: W: Save (word) to stack; R: Read (word) branch address.

\*5: Save (word) to stack.

\*6: W: Save (long word) to W stack; R: Read (long word) branch address.

\*7: Save (long word) to stack.

# MB90230 Series

Table 21 Branch 2 Instructions [20 Instructions]

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
CBNE A, #imm8, rel	3	*1	0	Branch when byte (A) $\neq$ imm8	—	—	—	—	—	*	*	*	*	—
CWBNE A, #imm16, rel	4	*1	0	Branch when byte (A) $\neq$ imm16	—	—	—	—	—	*	*	*	*	—
CBNE ear, #imm8, rel	4	*1	0	Branch when byte (ear) $\neq$ imm8	—	—	—	—	—	*	*	*	*	—
CBNE eam, #imm8, rel	4+	*1	(b)	Branch when byte (eam) $\neq$ imm8	—	—	—	—	—	*	*	*	*	—
CWBNE ear, #imm16, rel	5	*3	0	Branch when word (ear) $\neq$ imm16	—	—	—	—	—	*	*	*	*	—
CWBNE eam, #imm16, rel	5+	*2	(c)	Branch when word (eam) $\neq$ imm16	—	—	—	—	—	*	*	*	*	—
DBNZ ear, rel	3	*4	0	Branch when byte (ear) = (ear) - 1, and (ear) $\neq$ 0	—	—	—	—	—	*	*	*	—	—
DBNZ eam, rel	3+	*2	2× (b)	Branch when byte (ear) = (eam) - 1, and (eam) $\neq$ 0	—	—	—	—	—	*	*	*	—	*
DWBNZ ear, rel	3	*4	0	Branch when word (ear) = (ear) - 1, and (ear) $\neq$ 0	—	—	—	—	—	*	*	*	—	—
DWBNZ eam, rel	3+	14	2× (c)	Branch when word (eam) = (eam) - 1, and (eam) $\neq$ 0	—	—	—	—	—	*	*	*	—	*
		12												
INT #vct8	2	13	8× (c)	Software interrupt	—	—	R	S	—	—	—	—	—	—
INT addr16	3	14	6× (c)	Software interrupt	—	—	R	S	—	—	—	—	—	—
INTP addr24	4	9	6× (c)	Software interrupt	—	—	R	S	—	—	—	—	—	—
INT9	1	11	8× (c)	Software interrupt	—	—	R	S	—	—	—	—	—	—
RETI	1	6× (c)	Return from interrupt	—	—	*	*	*	*	*	*	*	*	—
RETIQ *6	2	6	*5	Return from interrupt	—	—	*	*	*	*	*	*	*	—
LINK #imm8	2		(c)	At constant entry, save old frame pointer to stack, set new frame pointer, and allocate local pointer area	—	—	—	—	—	—	—	—	—	—
		5		At constant entry, retrieve old frame pointer from stack.	—	—	—	—	—	—	—	—	—	—
UNLINK	1	4	(c)		—	—	—	—	—	—	—	—	—	—
		5			—	—	—	—	—	—	—	—	—	—
RET *7	1		(c)	Return from subroutine	—	—	—	—	—	—	—	—	—	—
RETP *8	1		(d)	Return from subroutine	—	—	—	—	—	—	—	—	—	—

For an explanation of "(b)", "(c)" and "(d)", refer to Table 5, "Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles."

\*1: 4 when branching, 3 when not branching

\*2: 5 when branching, 4 when not branching

\*3: 5 + (a) when branching, 4 + (a) when not branching

\*4: 6 + (a) when branching, 5 + (a) when not branching

\*5: 3 × (b) + 2 × (c) when an interrupt request is generated, 6 × (c) when returning from the interrupt.

\*6: High-speed interrupt return instruction. When an interrupt request is detected during this instruction, the instruction branches to the interrupt vector without performing stack operations when the interrupt is generated.

\*7: Return from stack (word)

\*8: Return from stack (long word)

Table 22 Other Control Instructions (Byte/Word/Long Word) [36 Instructions]

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW	
PUSHW A	1	3	(c)	word (SP) ← (SP) -2, ((SP)) ← (A)	—	—	—	—	—	—	—	—	—	—	
PUSHW AH	1	3	(c)	word (SP) ← (SP) -2, ((SP)) ← (AH)	—	—	—	—	—	—	—	—	—	—	
PUSHW PS	1	3	(c)	word (SP) ← (SP) -2, ((SP)) ← (PS)	—	—	—	—	—	—	—	—	—	—	
PUSHW rlst	2	*3	*4	(SP) ← (SP) -2n, ((SP)) ← (rlst)	—	—	—	—	—	—	—	—	—	—	
POPW A	1	3	(c)	word (A) ← ((SP)), (SP) ← (SP) +2	—	*	—	—	—	—	—	—	—	—	
POPW AH	1	3	(c)	word (AH) ← ((SP)), (SP) ← (SP) +2	—	—	—	—	—	—	—	—	—	—	
POPW PS	1	3	(c)	word (PS) ← ((SP)), (SP) ← (SP) +2	—	—	*	*	*	*	*	*	*	—	
POPW rlst	2	*2	*4	(rlst) ← ((SP)), (SP) ← (SP)	—	—	—	—	—	—	—	—	—	—	
JCTX @A	1	9	6× (c)	Context switch instruction	—	—	*	*	*	*	*	*	*	*	—
AND CCR, #imm8	2	3	0	byte (CCR) ← (CCR) and imm8	—	—	*	*	*	*	*	*	*	*	—
OR CCR, #imm8	2	3	0	byte (CCR) ← (CCR) or imm8	—	—	*	*	*	*	*	*	*	*	—
MOV RP, #imm8	2	2	0	byte (RP) ← imm8	—	—	—	—	—	—	—	—	—	—	
MOV ILM, #imm8	2	2	0	byte (ILM) ← imm8	—	—	—	—	—	—	—	—	—	—	
MOVEA RWi, ear	2	3	0	word (RWi) ← ear	—	—	—	—	—	—	—	—	—	—	
MOVEA RWi, eam	2+	2+ (a)	0	word (RWi) ← eam	—	—	—	—	—	—	—	—	—	—	
MOVEA A, ear	2	2	0	word (A) ← ear	—	*	—	—	—	—	—	—	—	—	
MOVEA A, eam	2+	1+ (a)	0	word (A) ← eam	—	*	—	—	—	—	—	—	—	—	
ADDSP #imm8	2	3	0	word (SP) ← ext (imm8)	—	—	—	—	—	—	—	—	—	—	
ADDSP #imm16	3	3	0	word (SP) ← imm16	—	—	—	—	—	—	—	—	—	—	
MOV A, brgl	2	*1	0	byte (A) ← (brgl)	Z	*	—	—	—	*	*	—	—	—	
MOV brg2, A	2	1	0	byte (brg2) ← (A)	—	—	—	—	—	*	*	—	—	—	
MOV brg2, #imm8	3	2	0	byte (brg2) ← imm8	—	—	—	—	—	*	*	—	—	—	
NOP	1	1	0	No operation	—	—	—	—	—	—	—	—	—	—	
ADB	1	1	0	Prefix code for AD space access	—	—	—	—	—	—	—	—	—	—	
DTB	1	1	0	Prefix code for DT space access	—	—	—	—	—	—	—	—	—	—	
PCB	1	1	0	Prefix code for PC space access	—	—	—	—	—	—	—	—	—	—	
SPB	1	1	0	Prefix code for SP space access	—	—	—	—	—	—	—	—	—	—	
NCC	1	1	0	Prefix code for no flag change	—	—	—	—	—	—	—	—	—	—	
CMR	1	1	0	Prefix code for the common register bank	—	—	—	—	—	—	—	—	—	—	
MOVW SPCU, #imm16	4	2	0	word (SPCU) ← (imm16)	—	—	—	—	—	—	—	—	—	—	
MOVW SPCL, #imm16	4	2	0	word (SPCL) ← (imm16)	—	—	—	—	—	—	—	—	—	—	
SETSPC	2	2	0	Stack check operation enable	—	—	—	—	—	—	—	—	—	—	
CLRSPC	2	2	0	Stack check operation disable	—	—	—	—	—	—	—	—	—	—	
BTSCN A	2	*5	0	byte (A) ← position of "1" bit in word (A)	Z	—	—	—	—	*	—	—	—	—	
BTSCNSA	2	*6	0	byte (A) ← position of "1" bit in word (A) × 2	Z	—	—	—	—	*	—	—	—	—	
BTSCNDA	2	*7	0	byte (A) ← position of "1" bit in word (A) × 4	Z	—	—	—	—	*	—	—	—	—	

For an explanation of "(a)" and "(c)", refer to Tables 4 and 5.

\*1: PCB, ADB, SSB, USB, and SPB: 1 cycle

DTB: 2 cycles

DPR: 3 cycles

\*2: 3 + 4 × (pop count)

\*3: 3 + 4 × (push count)

\*4: Pop count × (c), or push count × (c)

\*5: 3 when AL is 0, 5 when AL is not 0.

\*6: 4 when AL is 0, 6 when AL is not 0.

\*7: 5 when AL is 0, 7 when AL is not 0.

# MB90230 Series

Table 23 Bit Manipulation Instructions [21 Instructions]

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
MOVB A, dir:bp	3	3	(b)	byte (A) ← (dir:bp) b	Z	*	—	—	—	*	*	—	—	—
MOVB A, addr16:bp	4	3	(b)	byte (A) ← (addr16:bp) b	Z	*	—	—	—	*	*	—	—	—
MOVB A, io:bp	3	3	(b)	byte (A) ← (io:bp) b	Z	*	—	—	—	*	*	—	—	—
MOVB dir:bp, A	3	4	2× (b)	bit (dir:bp) b ← (A)	—	—	—	—	—	*	*	—	—	*
MOVB addr16:bp, A	4	4	2× (b)	bit (addr16:bp) b ← (A)	—	—	—	—	—	*	*	—	—	*
MOVB io:bp, A	3	4	2× (b)	bit (io:bp) b ← (A)	—	—	—	—	—	*	*	—	—	*
SETB dir:bp	3	4	2× (b)	bit (dir:bp) b ← 1	—	—	—	—	—	—	—	—	—	*
SETB addr16:bp	4	4	2× (b)	bit (addr16:bp) b ← 1	—	—	—	—	—	—	—	—	—	*
SETB io:bp	3	4	2× (b)	bit (io:bp) b ← 1	—	—	—	—	—	—	—	—	—	*
CLRB dir:bp	3	4	2× (b)	bit (dir:bp) b ← 0	—	—	—	—	—	—	—	—	—	*
CLRB addr16:bp	4	4	2× (b)	bit (addr16:bp) b ← 0	—	—	—	—	—	—	—	—	—	*
CLRB io:bp	3	4	2× (b)	bit (io:bp) b ← 0	—	—	—	—	—	—	—	—	—	*
BBC dir:bp, rel	4	*1	(b)	Branch when (dir:bp) b = 0	—	—	—	—	—	—	*	—	—	—
BBC addr16:bp, rel	5	*1	(b)	Branch when (addr16:bp) b = 0	—	—	—	—	—	—	*	—	—	—
BBC io:bp, rel	4	*1	(b)	Branch when (io:bp) b = 0	—	—	—	—	—	—	*	—	—	—
BBS dir:bp, rel	4	*1	(b)	Branch when (dir:bp) b = 1	—	—	—	—	—	—	*	—	—	—
BBS addr16:bp, rel	5	*1	(b)	Branch when (addr16:bp) b = 1	—	—	—	—	—	—	*	—	—	—
BBS io:bp, rel	4	*1	(b)	Branch when (io:bp) b = 1	—	—	—	—	—	—	*	—	—	—
SBBS addr16:bp, rel	5	*2	2× (b)	Branch when (addr16:bp) b = 1, bit = 1	—	—	—	—	—	—	*	—	—	*
WBTS io:bp	3	*3	*4	Wait until (io:bp) b = 1	—	—	—	—	—	—	—	—	—	—
WBTC io:bp	3	*3	*4	Wait until (io:bp) b = 0	—	—	—	—	—	—	—	—	—	—

For an explanation of “(b)”, refer to Table 5, “Correction Values for Number of Cycles Used to Calculate Number of Actual Cycles.”

\*1: 5 when branching, 4 when not branching

\*2: 7 when condition is satisfied, 6 when not satisfied

\*3: Undefined count

\*4: Until condition is satisfied

**Table 24 Accumulator Manipulation Instructions (Byte/Word) [6 Instructions]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
SWAP	1	3	0	byte (A) 0 to 7 $\leftarrow \rightarrow$ (A) 8 to 15	—	—	—	—	—	—	—	—	—	—
SWAPW	1	2	0	word (AH) $\leftarrow \rightarrow$ (AL)	—	*	—	—	—	—	—	—	—	—
EXT	1	1	0	Byte code extension	X	—	—	—	—	*	*	—	—	—
EXTW	1	2	0	Word code extension	—	X	—	—	—	*	*	—	—	—
ZEXT	1	1	0	Byte zero extension	Z	—	—	—	—	R	*	—	—	—
ZEXTW	1	2	0	Word zero extension	—	Z	—	—	—	R	*	—	—	—

**Table 25 String Instructions [10 Instructions]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
MOVS/MOVS1	2	*2	*3	Byte transfer @AH+ $\leftarrow$ @AL+, counter = RW0	—	—	—	—	—	—	—	—	—	—
MOVSD	2	*2	*3	Byte transfer @AH- $\leftarrow$ @AL-, counter = RW0	—	—	—	—	—	—	—	—	—	—
SCEQ/SCEQI	2	*1	*4	Byte retrieval @AH+ – AL, counter = RW0	—	—	—	—	—	*	*	*	*	—
SCEQD	2	*1	*4	Byte retrieval @AH- – AL, counter = RW0	—	—	—	—	—	*	*	*	*	—
FILS/FILSI	2	5m +3	*5	Byte filling @AH+ $\leftarrow$ AL, counter = RW0	—	—	—	—	—	*	*	—	—	—
MOVSW/MOVSWI	2	*2	*6	Word transfer @AH+ $\leftarrow$ @AL+, counter = RW0	—	—	—	—	—	—	—	—	—	—
MOVSWD	2	*2	*6	Word transfer @AH- $\leftarrow$ @AL-, counter = RW0	—	—	—	—	—	—	—	—	—	—
SCWEQ/SCWEQI	2	*1	*7	Word retrieval @AH+ – AL, counter = RW0	—	—	—	—	—	*	*	*	*	—
SCWEQD	2	*1	*7	Word retrieval @AH- – AL, counter = RW0	—	—	—	—	—	*	*	*	*	—
FILSW/FILSWI	2	5m +3	*8	Word filling @AH+ $\leftarrow$ AL, counter = RW0	—	—	—	—	—	*	*	—	—	—

m: RW0 value (counter value)

\*1: 3 when RW0 is 0,  $2 + 6 \times (\text{RW0})$  for count out, and  $6n + 4$  when match occurs

\*2: 4 when RW0 is 0,  $2 + 6 \times (\text{RW0})$  in any other case

\*3: (b)  $\times$  (RW0)

\*4: (b)  $\times$  n

\*5: (b)  $\times$  (RW0)

\*6: (c)  $\times$  (RW0)

\*7: (c)  $\times$  n

\*8: (c)  $\times$  (RW0)

**Table 26 Multiple Data Transfer Instructions [18 Instructions]**

Mnemonic	#	~	B	Operation	LH	AH	I	S	T	N	Z	V	C	RMW
MOV M @A, @RLi, #imm8	3	*1	*3	Multiple data trasfer byte ((A)) $\leftarrow$ ((RLi))	—	—	—	—	—	—	—	—	—	—
MOV M @A, eam, #imm8	3+	*2	*3	Multiple data trasfer byte ((A)) $\leftarrow$ (eam)	—	—	—	—	—	—	—	—	—	—
MOV M addr16, @RLi, #imm8	5	*1	*3	Multiple data trasfer byte (addr16) $\leftarrow$ ((RLi))	—	—	—	—	—	—	—	—	—	—
MOV M addr16, eam, #imm8	5+	*2	*3	Multiple data trasfer byte (addr16) $\leftarrow$ (eam)	—	—	—	—	—	—	—	—	—	—
MOV MW @A, @RLi, #imm8	3	*1	*4	Multiple data trasfer word ((A)) $\leftarrow$ ((RLi))	—	—	—	—	—	—	—	—	—	—
MOV MW @A, eam, #imm8	3+	*2	*4	Multiple data trasfer word ((A)) $\leftarrow$ (eam)	—	—	—	—	—	—	—	—	—	—
MOV MW addr16, @RLi, #imm8	5	*1	*4	Multiple data trasfer word (addr16) $\leftarrow$ ((RLi))	—	—	—	—	—	—	—	—	—	—
MOV MW addr16, eam, #imm8	5+	*2	*4	Multiple data trasfer word (addr16) $\leftarrow$ (eam)	—	—	—	—	—	—	—	—	—	—
MOV M @RLi, @A, #imm8	3	*1	*3	Multiple data trasfer byte ((RLi)) $\leftarrow$ ((A))	—	—	—	—	—	—	—	—	—	—
MOV M eam, @A, #imm8	3+	*2	*3	Multiple data trasfer byte (eam) $\leftarrow$ ((A))	—	—	—	—	—	—	—	—	—	—
MOV M @RLi, addr16, #imm8	5	*1	*3	Multiple data transfer byte ((RLi)) $\leftarrow$ (addr16)	—	—	—	—	—	—	—	—	—	—
MOV M eam, addr16, #imm8	5+	*2	*3	Multiple data transfer byte (eam) $\leftarrow$ (addr16)	—	—	—	—	—	—	—	—	—	—
MOV MW @RLi, @A, #imm8	3	*1	*4	Multiple data trasfer word ((RLi)) $\leftarrow$ ((A))	—	—	—	—	—	—	—	—	—	—
MOV MW eam, @A, #imm8	3+	*2	*4	Multiple data trasfer word (eam) $\leftarrow$ ((A))	—	—	—	—	—	—	—	—	—	—
MOV MW @RLi, addr16, #imm8	5	*1	*4	Multiple data transfer word ((RLi)) $\leftarrow$ (addr16)	—	—	—	—	—	—	—	—	—	—
MOV MW eam, addr16, #imm8	5+	*2	*4	Multiple data transfer word (eam) $\leftarrow$ (addr16)	—	—	—	—	—	—	—	—	—	—
MOV M bnk : addr16, *5	7	*1	*3	Multiple data transfer	—	—	—	—	—	—	—	—	—	—
bnk : addr16, #imm8				byte (bnk:addr16) $\leftarrow$ (bnk:addr16)										
MOV MW bnk : addr16, *5	7	*1	*4	Multiple data transfer	—	—	—	—	—	—	—	—	—	—
bnk : addr16, #imm8				word (bnk:addr16) $\leftarrow$ (bnk:addr16)										

\*1: 5 + imm8  $\times$  5, 256 times when imm8 is zero.

\*2: 5 + imm8  $\times$  5 + (a), 256 times when imm8 is zero.

\*3: Number of transfers  $\times$  (b)  $\times$  2

\*4: Number of transfers  $\times$  (c)  $\times$  2

\*5: The bank register specified by "bnk" is the same as for the MOVS instruction.


## ■ ORDERING INFORMATION

Model	Package	Remarks
MB90233PFV-XXX	100-pin Plastic LQFP (FPT-100P-M05)	
MB90234PFV	100-pin Plastic LQFP (FPT-100P-M05)	Only ES
MB90W234ZFV	100-pin Ceramic SQFP (FPT-100C-C01)	Only ES

# MB90230 Series

## ■ PACKAGE DIMENSIONS


100-pin Plastic LQFP  
(FPT-100P-M05)

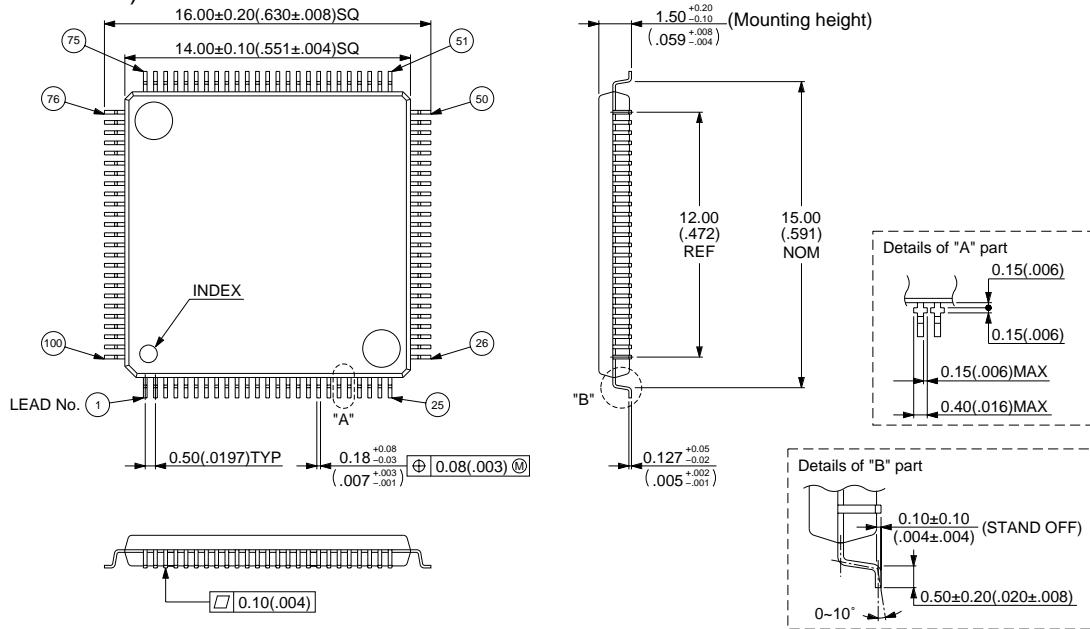

© 1995 FUJITSU LIMITED F10007S-2C-3

Dimensions in mm (inches)

100-pin Ceramic LQFP  
(FPT-100C-C01)

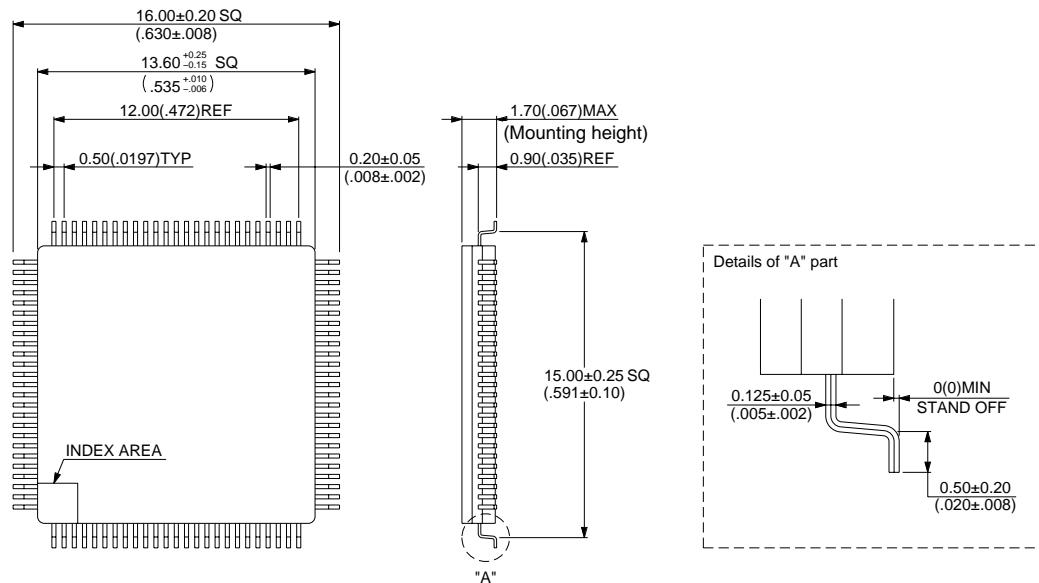

© 1995 FUJITSU LIMITED F10015SC-1-3

Dimensions in mm (inches)

## FUJITSU LIMITED

*For further information please contact:*

### **Japan**

FUJITSU LIMITED  
Corporate Global Business Support Division  
Electronic Devices  
KAWASAKI PLANT, 4-1-1, Kamikodanaka  
Nakahara-ku, Kawasaki-shi  
Kanagawa 211-8588, Japan  
Tel: 81(44) 754-3763  
Fax: 81(44) 754-3329

<http://www.fujitsu.co.jp/>

### **North and South America**

FUJITSU MICROELECTRONICS, INC.  
Semiconductor Division  
3545 North First Street  
San Jose, CA 95134-1804, USA  
Tel: (408) 922-9000  
Fax: (408) 922-9179

Customer Response Center  
Mon. - Fri.: 7 am - 5 pm (PST)  
Tel: (800) 866-8608  
Fax: (408) 922-9179

<http://www.fujitsumicro.com/>

### **Europe**

FUJITSU MIKROELEKTRONIK GmbH  
Am Siebenstein 6-10  
D-63303 Dreieich-Buchschlag  
Germany  
Tel: (06103) 690-0  
Fax: (06103) 690-122

<http://www.fujitsu-ede.com/>

### **Asia Pacific**

FUJITSU MICROELECTRONICS ASIA PTE LTD  
#05-08, 151 Lorong Chuan  
New Tech Park  
Singapore 556741  
Tel: (65) 281-0770  
Fax: (65) 281-0220  
<http://www.fmap.com.sg/>

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document are presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

FUJITSU semiconductor devices are intended for use in standard applications (computers, office automation and other office equipment, industrial, communications, and measurement equipment, personal or household devices, etc.).

### **CAUTION:**

Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Law of Japan, the prior authorization by Japanese government will be required for export of those products from Japan.