

30A and 50A, 48VDC EMI Filters

Features

- ◆ High Attenuation
- ◆ Stud Terminal Connection
- ◆ Compact Size




Last time buy - June 1, 2014


Specifications

Model		MBS4830	MBS4850
Rated Voltage	VDC	48VDC (72VDC Max)	
Rated Current	A	30A, 45A peak surge for 1 min	50A, 75A peak surge for 1 min
Test Voltage (For 1 min.)	V	Terminals to Case: 700VDC (20mA) at 25°C, 70% RH Between terminals 100VDC (20mA) at 25°C, 70% RH	
Isolation Resistance	MΩ	500MΩ minimum at 25°C, 70% RH	
Leakage Current	mA	Not Applicable	
DC Resistance	mΩ	8	4
Temperature Rise	°C	35	30
Operating Temperature	°C	-25° to +85°C (see derating curve)	
Storage Temperature	°C	-40° to +85°	
Operating Humidity	-	30 to 95% RH (non condensing)	
Storage Humidity	-	10 to 95% RH (non condensing)	
Vibration	-	10-55-10Hz, Amplitude 1.5mm (1 minute), X, Y, Z (2 hour each)	
Weight (Typ)	g	310	650
Warranty	-	1 Year	

MBS4830 Outline Drawing

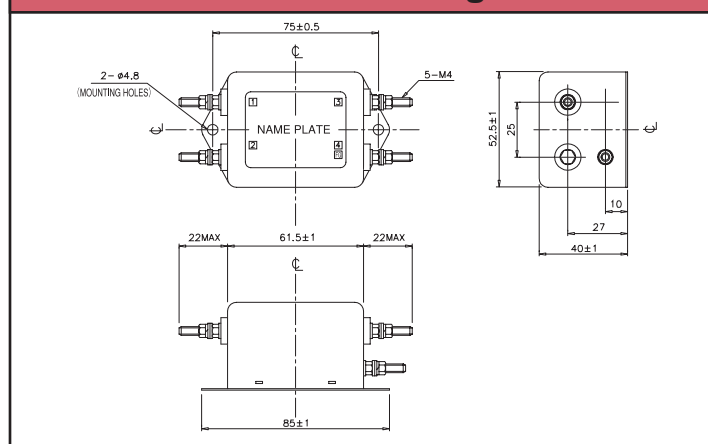


MBS4850 Outline Drawing

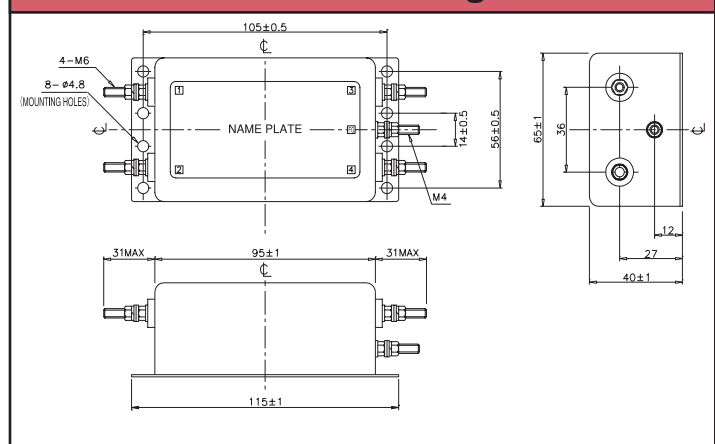


Circuit

Circuit

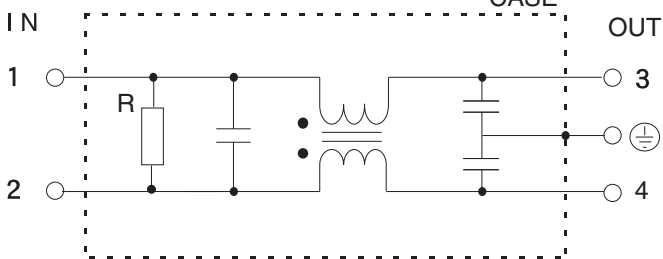

Derating


Derating

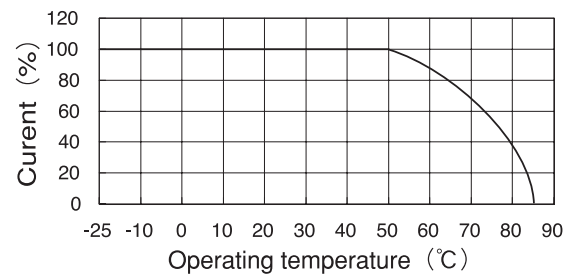

Typ. Insertion Loss, Symmetrical


(1) Asymmetrical

MBS4830

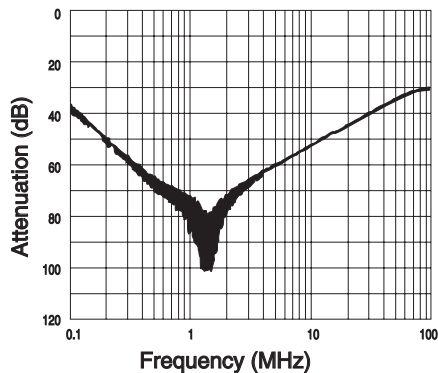


(2) Symmetrical


MBS4830

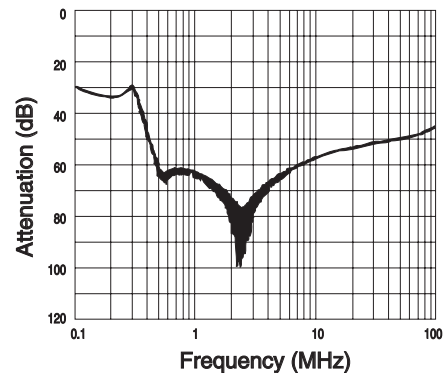

MBS4850

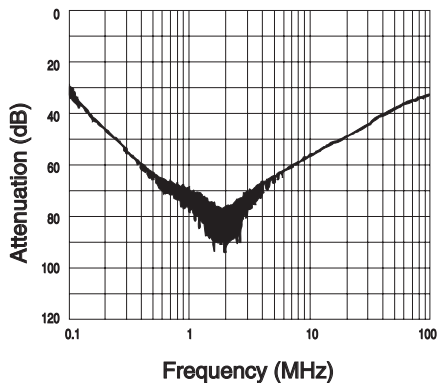

MBS4850

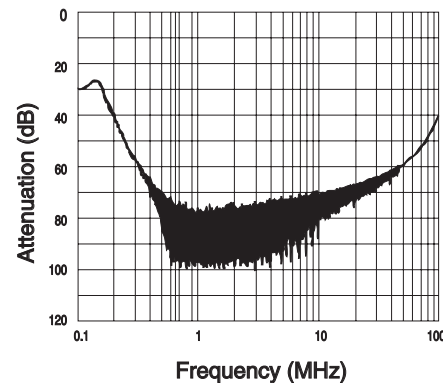

For Additional Information, please visit
us.tdk-lambda.com/lp/products/mbs-series.htm



Last time buy - June 1, 2014

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK-Lambda:](#)

[MBS-1210-22](#) [MBS-1215-22](#) [MBS-1220-22](#) [MBS-1230-22](#) [MBS-1320-33](#) [MBS-1330-33](#) [MBS4830](#) [MBS4850](#)
[MBS-1205-22](#) [MBS4850S](#)