



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DDC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
2075	A	RELEASED	JN	11/20/09	JN	11/20/09	JN	11/20/09



SPECIFICATIONS

Rated Voltage: AC 300V

Rated current: 15A

Wire Size: 26~14 AWG

Housing Material: Polyamide66 (UL94V-0)

Terminal: Brass, Tin Plated


Wire Protector: Stainless strip steel

Screw Size: M2.6, Steel, Zinc Plated

Operating Temperature: -40°C to +105°C

Torque: 2.5 lb-inch

PCB Hole Diameter: Ø1.4mm

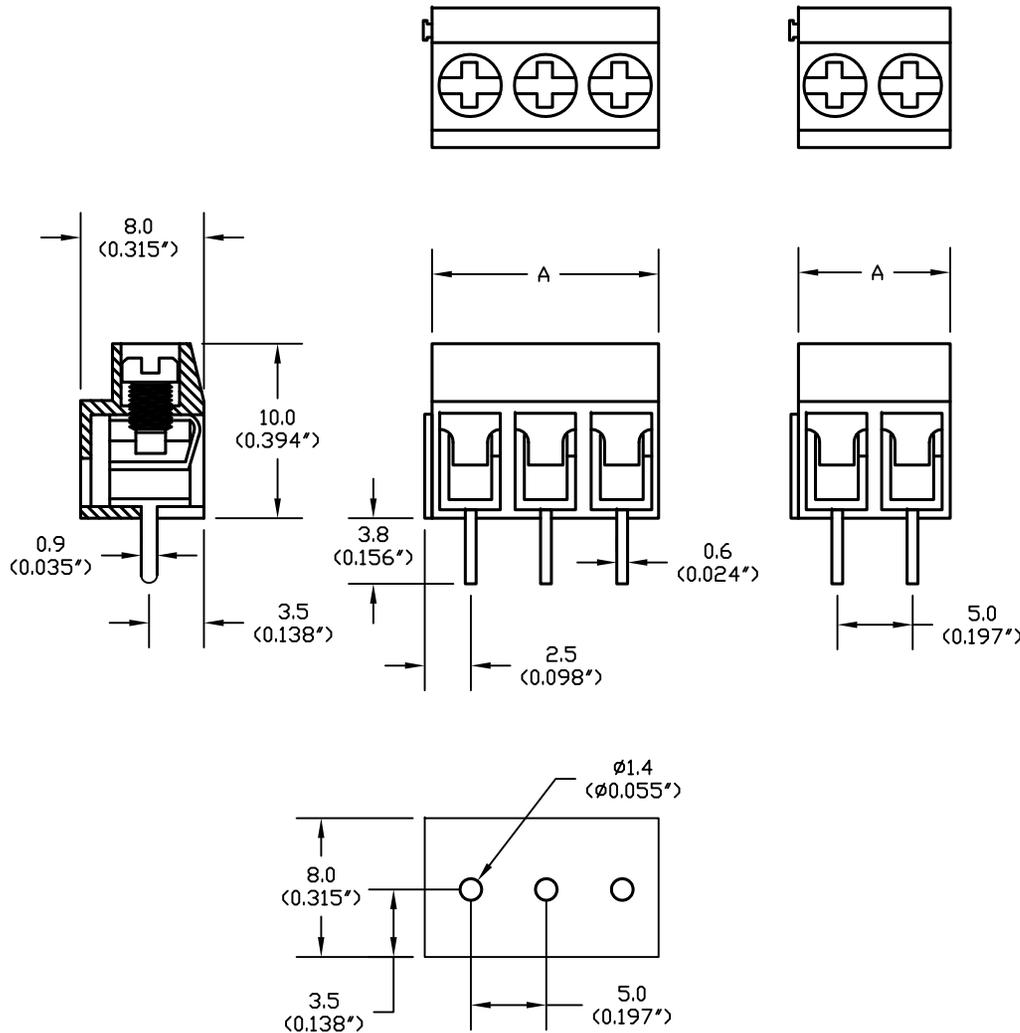

Pitch: 5.00mm (0.197inch)			
Mfg. P/N	No. of Pins	(A) mm	(A) inches
MA331-500M03	3	15	0.591
MA331-500M04	4	20	0.788
MA331-500M05	5	25	0.985
MA331-500M06	6	30	1.182
MA331-500M07	7	35	1.379
MA331-500M08	8	40	1.576
MA331-500M09	9	45	1.773
MA331-500M10	10	50	1.97
MA331-500M11	11	55	2.137
MA331-500M12	12	60	2.364

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jason Nash	11/20/09
CHECKED BY:	DATE:
Jason Nash	11/20/09
APPROVED BY:	DATE:
Jason Nash	11/20/09

DRAWING TITLE:			
Terminal Block			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	Ta-1208	Ta-1208.dwg	A
SCALE:	U.O.M.:	SHEET:	
NTS	INCHES [mm]	1 OF 1	