




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION,  
WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED  
WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC  
TECHNOLOGY.

SPC-F005.DWG

#### REVISIONS

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No. 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
2070	A	Released	JN	09-03-09	JWM	09-03-09	JWM	09-03-09

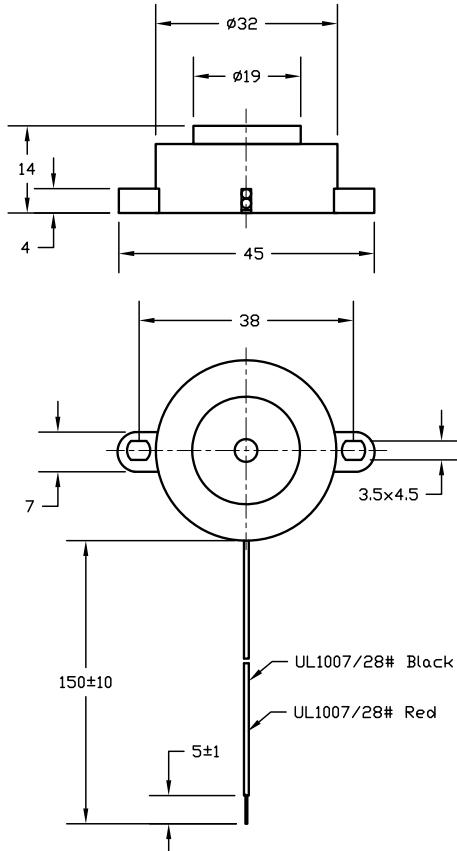

## Specification

1. Rated Voltage: 24VDC
2. Operating Voltage: 20 ~ 28VDC
3. Max. Rated Current: 20mA at 24VDC
4. Min. Sound Pressure Level: 90 dB at 24VDC/30cm
5. Resonant Frequency: 3.7±0.5KHz
6. Tone Nature: Continuous
7. Case Material: ABS/White
8. Operating Temperature: -20~+60°C
9. Store Temperature: -30~+70°C
10. Weight: 8g

DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED  
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE  
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE  
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE  
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT  
FOR THE INTENDED USE AND ASSUME ALL RISK AND  
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:  
UNLESS OTHERWISE  
SPECIFIED,  
DIMENSIONS ARE  
FOR REFERENCE  
PURPOSES ONLY.

DRAWN BY:	DATE:
Jason Nash	09-03-09
CHECKED BY:	DATE:
Jason Nash	09-03-09
APPROVED BY:	DATE:
Jason Nash	09-03-09

DRAWING TITLE:		Piezo Buzzer		
SIZE	DWG. NO.	ELECTRONIC FILE		REV
A	MCKPI-G3210L-24-3986	25R0666.dwg		A
SCALE:	NTS	U.O.M.:	INCHES [mm]	SHEET: 1 OF 1