
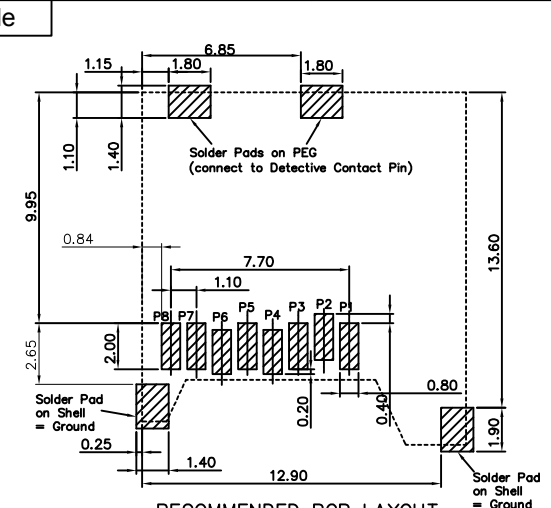
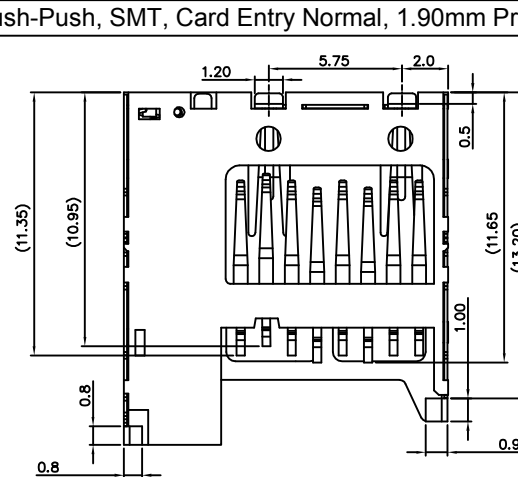


A horizontal number line with tick marks at each integer from 1 to 8. The numbers 1, 2, 3, 4, 5, 6, 7, and 8 are written above their respective tick marks.

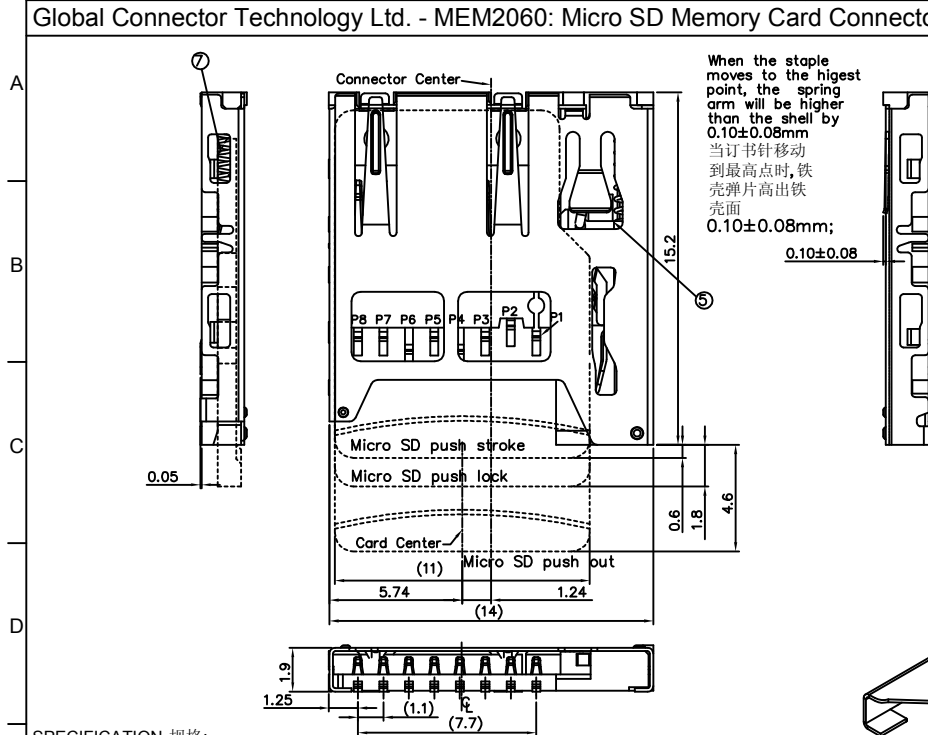

GENERAL TOLERANCE: ± 0.05



AS VIEWED FROM COMPONENT SIDE

Component Outline

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH & PLATING
1	Shell	1	Copper Alloy	Solder area Gold Flash
2	Housing	1	Thermoplastic UL94V-0	Color: Black
3	Cam Rod	1	Copper Alloy	_____
4	Detective Contact PIN	1	Copper Alloy	Gold
5	Slider	1	Thermoplastic UL94V-0	Color: Black
6	Retention Contact	1	Copper Alloy	_____
7	Spring	1	SWP #0.20	Nickel
8	Data Contact	8	Copper Alloy	15u" Gold

Scale	Revision	Material	Drawn by	E & OE	Sheet No.
NTS	C	See Note	PKN		1/3

By	PKN	ASE	ADS
DETAIL	DRAWING RELEASE	ECN080724A	ECN080808B
REV DATE	A 03/04/08	B 24/07/08	C 08/08/08

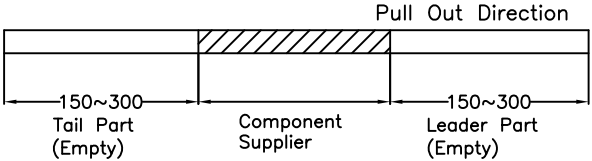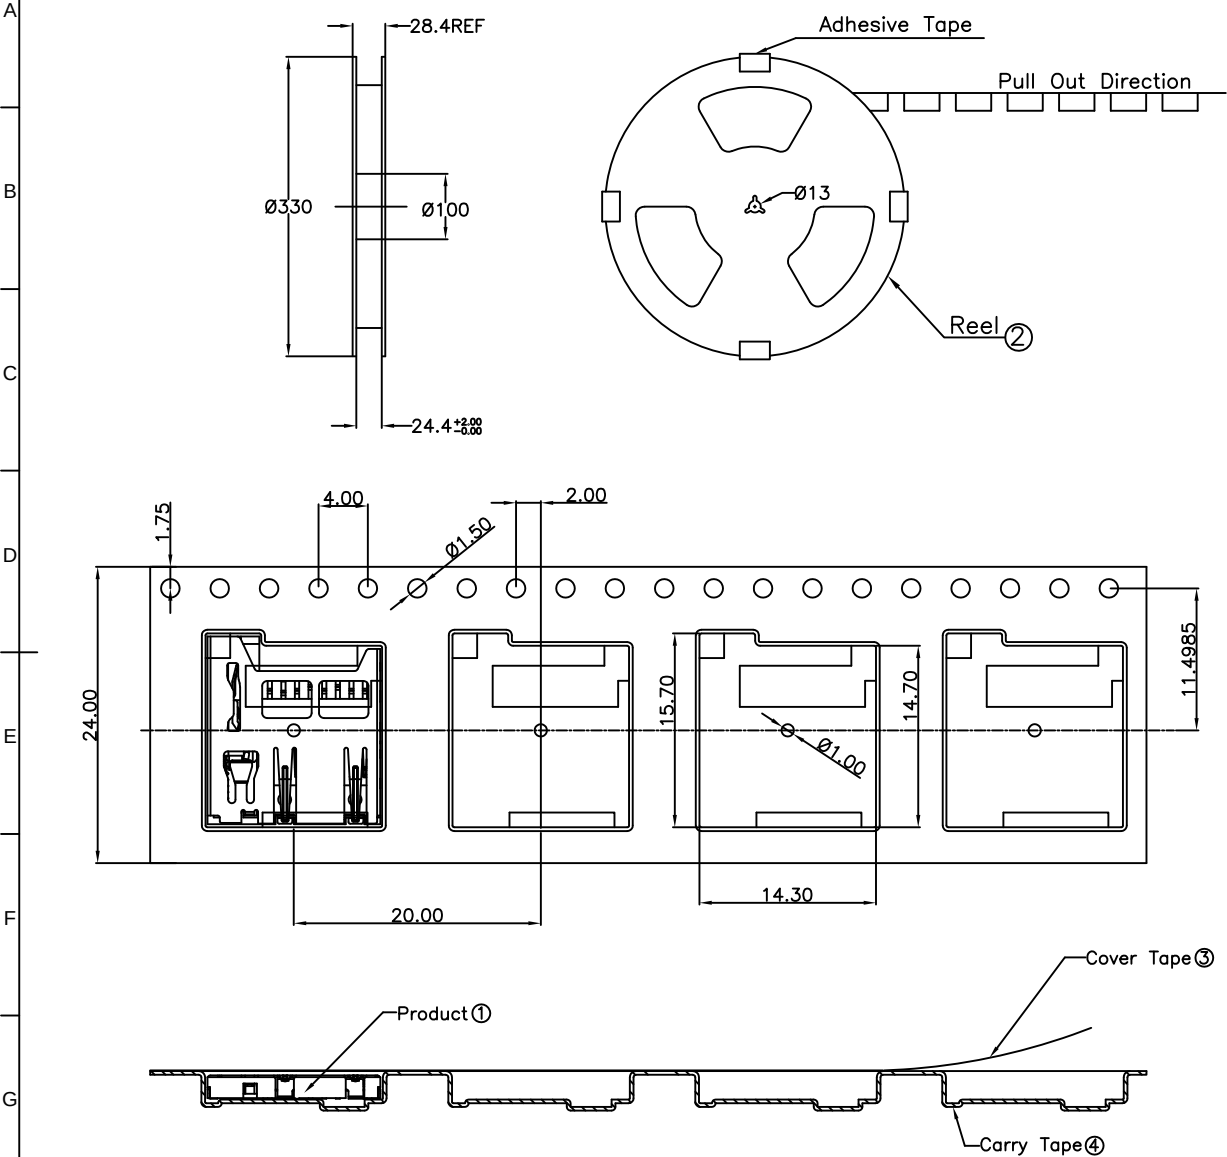

- NOTE 注意:
1. 150-300mm of the leading & tail of the CARRY TAPE will not be used
前部份與尾部各留出150~300mm長度不裝產品
 2. Each Cavity holds 1pc. of Product. Placement methods as shown in the diagram
每穴放置1PC產品, 放置位置如圖所示
 3. After the packing machine finished packing, stick adhesive tape on the end.
At the four quadrants of the REEL, stick on the adhesive tape to avoid out-spreading of the REEL.
On each REEL, stick 1pc. of label.
包裝機包好後尾端貼上膠帶, 在REEL的四個等分點貼上膠帶, 以防止REEL張開, 每REEL貼1PC標籤
 4. Packing Quantity: 1,000pcs/REEL, 5 REEL/Carton, 5,000pcs/Carton
包裝數量:1,000件/卷筒, 5 卷筒/紙箱, 5,000件/紙箱
 5. Place 1pcs. of hard card-board, and 1pcs. of bubble-pad at the bottom of the Carton.
Around the four sides, stuff with the triangular pad, then place those filled REEL into the carton, between each REEL there will be 1pc of bubble-pad as separator, accordingly place all 5 REELS into the carton,
on the top place 1pc of bubble-pad & 1 hard card-board, lastly close the carton with adhesive tapes.
先在紙箱底部墊上1PC硬紙板, 在墊上1PC氣泡墊, 四周墊上三角墊, 然後把裝好產品的REEL放置紙箱中, 每REEL之間隔1PC氣泡墊, 依次把5REEL產品放到紙箱中, 在上面墊上各1PC氣泡墊和硬紙板, 最後用膠帶封箱
 6. The peel-off force between the COVER TAPE & CARRY TAPE is: 0.1N-0.7N (variation within 0.3N). Peel-off angle:165-175 degree; Speed of peel-off: 250mm-300mm/min.COVER TAPE 与CARRY TAPE剥离力: 0.1N-0.7N(跳动量在0.3N以内)剥离角度: 165-175度;剥离速度:250mm-300mm/分钟

Packing Materials Per Carton 每紙箱包裝物料清單:

Item	Part Description	品名	Specification	規格	QTY	用量
①	Micro SD Push (ON)	常开	Push Push Type (Normal On)	常开	5000PCS	
②	REEL	卷筒	D=Ø330mm,d=Ø100mm,H=24.4mm		5PCS	
③	Cover Tape	封帶	W=21.3mm,T=0.05mm		20300mm	
④	Carry Tape	卷帶	W=24mm,P=20,T=0.3mm		20300mm	
⑤	Hard Cardboard	硬紙板	330mm*330mm*3mm		2PCS	
⑥	Bubble-Pad	气泡墊	310mm*310mm*10mm		6PCS	
⑦	Label	標籤			6PCS	
⑧	Triangular Pad	三角墊	120mm*85mm*155mm(T=3mm)		4PCS	
⑨	Carton	紙箱	350mm*350mm*177mm		1PCS	

By	PKN	ASE	ADS
DETAIL	DRAWING RELEASE	ECN080724A	ECN080808B
REV DATE	A 03/04/08	B 24/07/08	C 08/08/08





Tolerances (Except as noted)	Part Number:-	Date:-
Dimensions in mm	MEM2060	03 APR 08
	Description:-	
	MICRO SD MEMORY CARD CONNECTOR, PUSH-PUSH, SMT, CARD ENTRY NORMAL, 1.90mm PROFILE	
Third Angle Projection	© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT	

GCT

www.globalconnectortechology.com

Scale NTS	Revision C	Material See Note	Drawn by PKN	Sheet No. E & OE 2/3
--------------	---------------	----------------------	-----------------	----------------------------

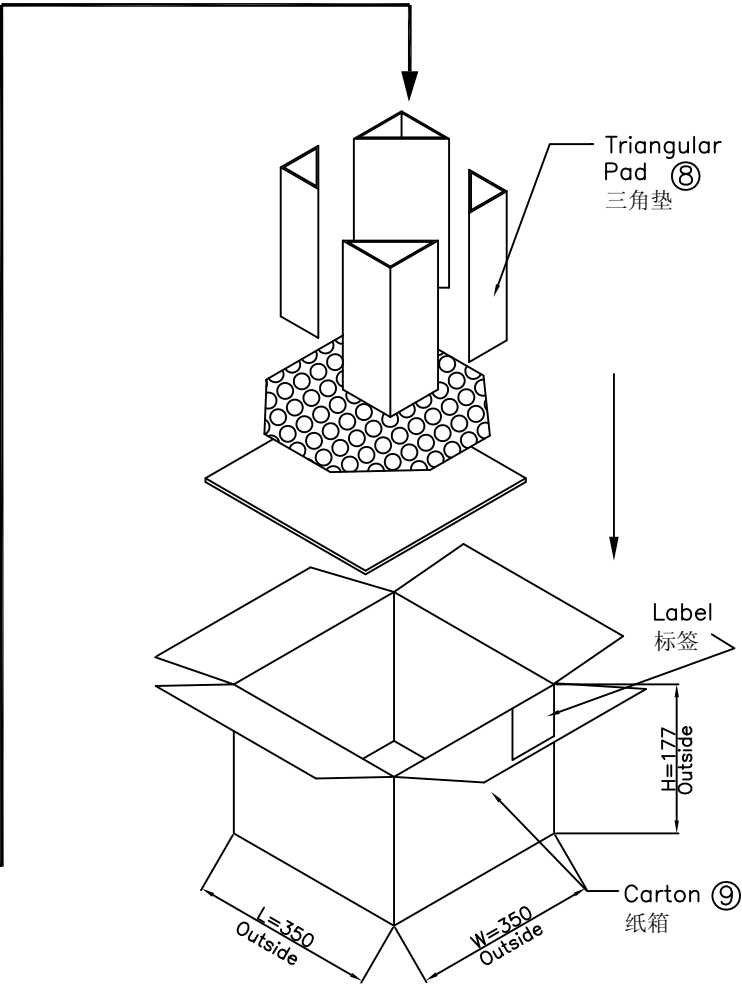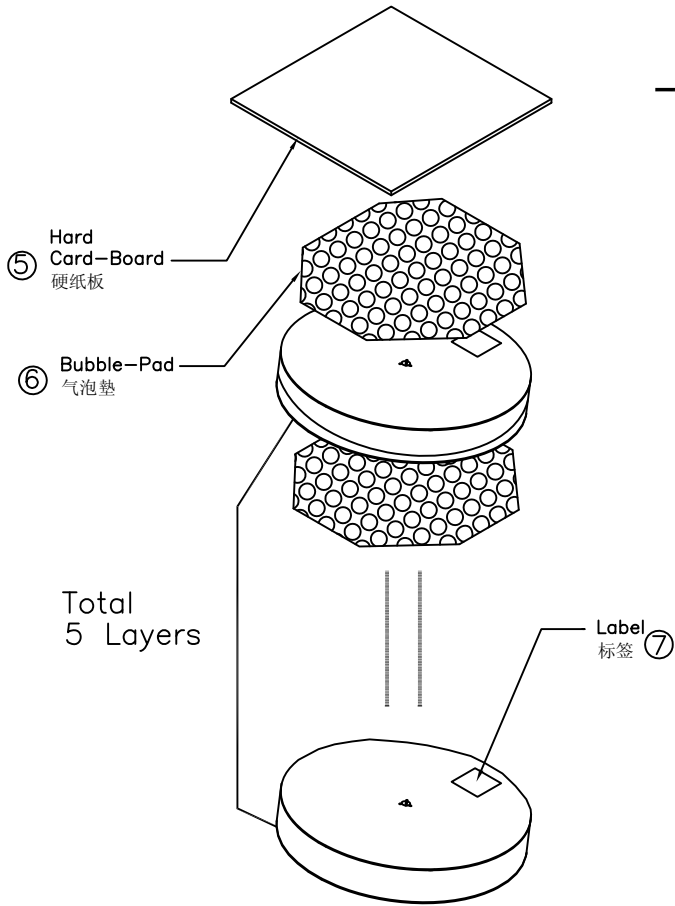

Notes 注意:

- 1.Primary Packing: 1K pcs/REEL 第一重包装:1000件 / 卷筒
- 2.Secondary Packing: 5 REEL / CARTON (5K PCS/CARTON) 第二重包装:5个卷筒 / 纸箱 (即5000件 / 纸箱)
- 3.Net Weight: 0.44g/pcs 每件净重:0.44g
- 4.Gross Weight: 0.88Kg/REEL, 5.4Kg/Carton 每卷筒毛重:0.88Kg, 每纸箱毛重:5.4Kg

By	PKN	ASE	ADS
DETAIL	DRAWING RELEASE	ECN080724A	ECN080808B
REV	A	B	C
DATE	03/04/08	24/07/08	08/08/08



Tolerances (Except as noted)	Part Number:- MEM2060	Date:- 03 APR 08
Dimensions in mm	Description:- MICRO SD MEMORY CARD CONNECTOR, PUSH-PUSH, SMT, CARD ENTRY NORMAL, 1.90mm PROFILE	
Third Angle Projection	© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT	

GCT

www.globalconnectortechology.com

Scale NTS	Revision C	Material See Note	Drawn by PKN	E & OE	Sheet No. 3/3
--------------	---------------	----------------------	-----------------	--------	------------------