


- **EMI input filter meets MIL-STD-461C, CE03**
- **Output filter reduces ripple**
 - -55° to +100°C operation
 - 17 to 40 VDC input, typical
 - Fully Isolated
 - 50 V for up to 50 ms transient protection
- Inhibit function
- Sync function available on select modules
- Sense available on select single output modules
- Indefinite short circuit protection

MULTIPLE OUTPUT (1-8) 28 VIN, FILTERED, FACTORY CONFIGURABLE DC/DC CONVERTERS

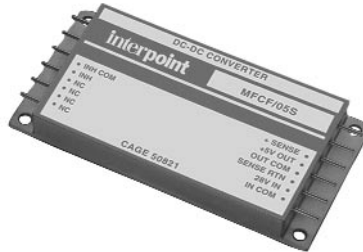

Size (max):MFCG-H 3.005 x 1.505 x 0.400 inches (76.33 x 38.23 x 10.16 mm)

MFCA-F 3.005 x 2.260 x 0.400 inches (76.33 x 57.40 x 10.16 mm)

Weight: MFCG-H 100 grams maximum

MFCA-F 150 grams maximum

Screening: Standard or ES

MFC SERIES UP TO 30 WATTS

VDC OUTPUT

Mix or match voltages and power to configure from one to eight outputs.

DESCRIPTION

Interpoint's MFC Series™ of converters offers one, two, or three individual converters combined with an EMI filter which is designed to meet the requirements of MIL-STD-461C CE03. Many combinations are available with choices from six different output voltages and four different power levels resulting in one package with from one to eight output voltages.

The MFC Series of converters uses Interpoint proprietary modules as building blocks for creating single package optimized solutions with proven reliability and short lead times.

All converters have an inhibit function which disables the outputs and places the unit in a low quiescent current mode. Remote sense and margining up are available on the 30 watt single modules. The 15 watt and 30 watt choices have synchronization.

Table 1: Modules – Power and Vout

Power	Vout	Features
30 Watt	3.3	Inhibit &
	5	Sync &
	12	Sense/
	15	Trim up
	18	
	±5	Inhibit &
	±12	Sync
	±15	
15 Watt	3.3	Inhibit &
	5	Sync
	5.2	
	12	
	15	
	28	
	±5	
	±12	
±15		

Power	Vout	Features
5 Watt	5	Inhibit
	5.2	
	12	
	15	
	±5	
	±12	
±15		
1.5 Watt	3.3	Inhibit
	5	
	5.2	
	12	
	15	
	±5	
	±12	
	±15	

Table 2: Configurations

Case Size: 3.005 x 2.250 x 0.400 inches (76.33 x 57.15 x 10.16 mm)

Configuration Selection Letter ¹	Resulting Output Power (W)	Module Power (Watts) - Number of Modules			
		30	15	5	1.5
A	30	0	2	0	0
B	20	0	1	1	0
C	18	0	1	0	2
D	11	0	0	2	1
E	7	0	0	0	4

1. Case has eighteen pins which may limit the number of output voltages available.

Case Size: 3.005 x 1.505 x 0.400 inches (76.33 x 38.23 x 10.16 mm)

Configuration Selection Letter ²	Resulting Output Power (W)	Module Power (Watts) - Number of Modules			
		30	15	5	1.5
F	30	1	0	0	0
J	15	0	1	0	0
G	6	0	0	1	1
H	4	0	0	0	3

2. Case has twelve pins which may limit the number of output voltages available.

Selecting a configuration:

Begin with the base model letters - MFC. Add a configuration letter from "Table 2: Configurations" that matches the number of outputs and power level you require. Using "Table 1: Modules" from page 1, choose from the available voltages in the power levels determined by the configuration letter. Add the chosen voltages to the model and configuration letters beginning with the highest wattage down to the lowest.

As an example: To configure a four output, 20 watt converter, begin with MFCB. Choose the output voltages for the 15 watt and 5 watt modules in Table 2. For this example a 15 watt 5 volt dual output and a 5 watt 15 volt dual output were selected. The resulting configuration is MFCB/05D/15D.

More Examples:

MFCA/15D/12D

30 watt total, four outputs:

15 watt dual 15 volt, 15 watt dual 12 volt

MFCD/5D/12D/5S

11 watt total, five outputs:

5 watt dual 5 volt, 5 watt dual 12 volt, 1.5 watt single 5 volt



MFCG/5D/12D

6 watt total, four outputs:

5 watt dual 5 volt, 1.5 watt dual 12 volt

Note: The specifications on the following pages are for the individual modules. The specifications/performance of the configured converter may vary from the specifications in the "Electrical Characteristics" tables. Please contact the factory for details.

Configuration Example: MFCF/05S

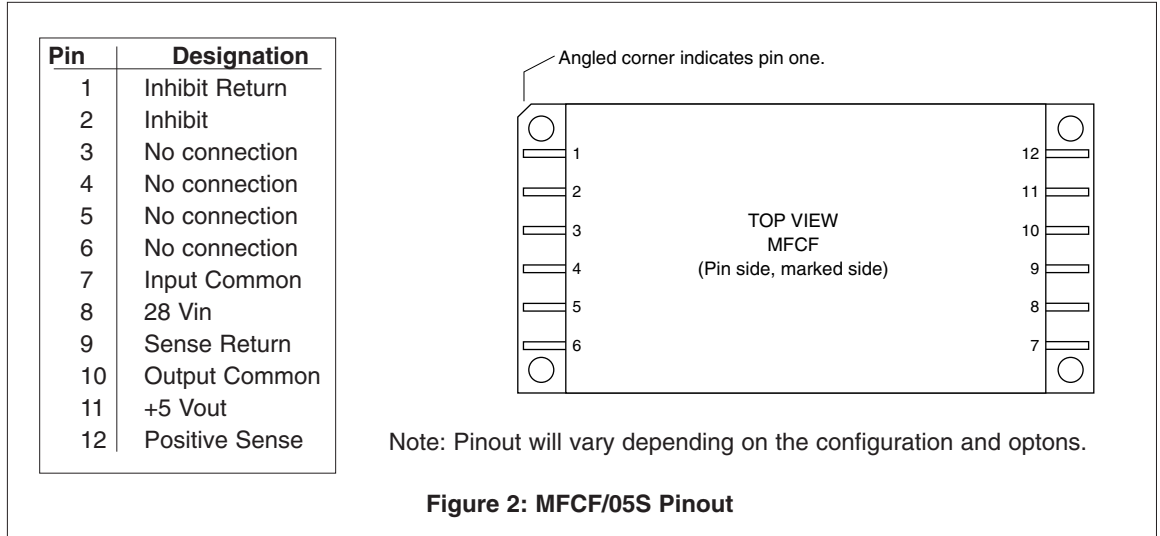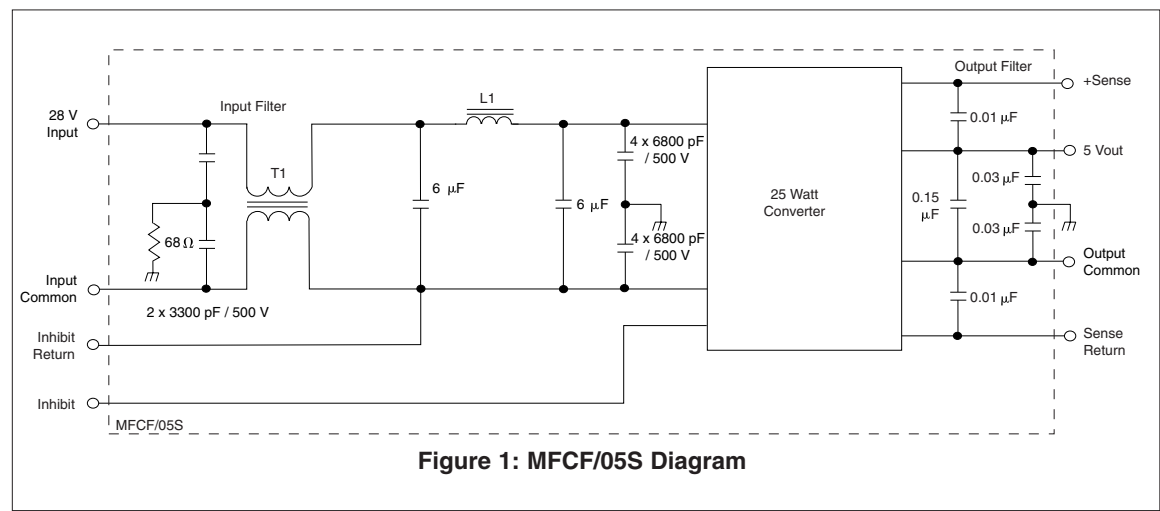

MFC SERIES UP TO 30 WATTS

FILTERED CONFIGURABLE DC/DC CONVERTERS

30 Watt Single Output Modules

ABSOLUTE MAXIMUM RATINGS

- Input Voltage**
- 16 to 40 VDC
- Output Power**
- 25 to 30 watts depending on model
- Lead Soldering Temperature (10 sec per pin)**
- 300°C
- Storage Temperature Range (Case)**
- -65°C to +135°C

RECOMMENDED OPERATING CONDITIONS

- Input Voltage Range**
- 16 to 40 VDC continuous
 - 50 V for 50 msec transient
- Case Operating Temperature (Tc)**
- -55°C to +100°C full power
 - -55°C to +115°C absolute
- Derating Output Power/Current**
- Linearly from 100% at 100°C to 0% at 115°C

SYNC AND INHIBIT

- Sync (500 to 675 kHz)**
- Duty cycle 40% min, 60% max
 - Logic low 0.8 V max
 - Logic high 4.5 V min, 5 V max
 - Referenced to input common
 - If not used, connect to input common
- Inhibit TTL Open Collector**
- Logic low (output disabled)
Voltage ≤ 0.8 V
 - Inhibit pin current 8.0 mA max
 - Referenced to input common
 - Logic high (output enabled)
Open collector

TYPICAL CHARACTERISTICS

- Output Voltage Temperature Coefficient**
- 100 ppm/°C typical single and dual outputs
 - 200 ppm/°C main, 300 ppm/°C aux triple output
- Input to Output Capacitance**
- 50 pF typ. (100 pF typ triple outputs)
- Current Limit**
- 115% of full load typical
- Isolation**
- 100 megohm minimum at 500 V
- Audio Rejection**
- 40 dB typ (50 dB typ triple output)
- Conversion Frequency**
- Free run 550 min, 600 typ, 650 max kHz
 - External sync 500 to 675 kHz
- Inhibit Pin Voltage (unit enabled)**
- 9 to 11 V

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.

SINGLE OUTPUT MODULES		3R3S			05S			12S			15S			18S			UNITS
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE		3.27	3.30	3.33	4.95	5.00	5.05	11.88	12.00	12.12	14.85	15.00	15.15	17.82	18.00	18.18	VDC
OUTPUT CURRENT ¹	V _{IN} = 16 to 40 VDC	0	—	6.06	0	—	5.0	0	—	2.5	0	—	2.0	0	—	1.67	A
OUTPUT POWER ¹	V _{IN} = 16 to 40 VDC	0	—	20	0	—	25	0	—	30	0	—	30	0	—	30	W
OUTPUT RIPPLE	10 kHz – 2 MHz	—	15	40	—	35	50	—	25	50	—	25	50	—	—	40	mV p-p
VOLTAGE	Tc = -55°C TO +125°C	—	—	50	—	50	90	—	40	90	—	40	90	—	—	90	
LINE REGULATION ²	V _{IN} = 16 to 40 VDC	—	5	10	—	10	30	—	10	30	—	10	30	—	—	30	mV
	Tc = -55°C TO +125°C	—	—	10	—	15	50	—	15	50	—	15	50	—	—	50	
LOAD REGULATION	NO LOAD TO FULL	—	2	10	—	5	30	—	5	30	—	5	30	—	—	30	mV
	Tc = -55°C TO +125°C	—	—	10	—	15	50	—	15	50	—	15	50	—	—	50	
INPUT VOLTAGE ¹	CONTINUOUS	16	28	40	16	28	40	16	28	40	16	28	40	16	28	40	VDC
NO LOAD TO FULL	TRANSIENT 50 ms	—	—	50	—	—	50	—	—	50	—	—	50	—	—	50	V
INPUT CURRENT ¹	NO LOAD	—	30	75	—	35	75	—	35	75	—	35	75	—	—	50	mA
	FULL LOAD	—	0.94	—	—	1.15	—	—	1.30	—	—	1.25	—	—	1.33	—	A
	INHIBITED	—	7	8	—	3	8	—	3	8	—	3	8	—	—	8	mA
INPUT RIPPLE	10 kHz – 10 MHz	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	mA p-p
CURRENT	Tc = -55°C TO +125°C	—	25	50	—	20	50	—	20	50	—	20	50	—	—	50	
EFFICIENCY		74	76	—	76	78	—	80	83	—	81	84	—	81	—	—	%
LOAD FAULT ³	SHORT CIRCUIT	—	—	10	—	—	10	—	—	10	—	—	10	—	—	10	W
	POWER DISSIPATION RECOVERY ^{1, 4}	—	1.4	6	—	1.4	5	—	1.4	5	—	1.4	5	—	1.4	—	ms
STEP LOAD RESP.	50% – 100% – 50% TRANSIENT RECOVERY ⁴	—	±125	±250	—	±200	±300	—	±250	±400	—	±350	±500	—	—	±600	mV pk
		—	—	200	—	60	200	—	60	200	—	60	200	—	60	—	μs
STEP LINE RESP.	16 – 40 – 16 VDC TRANSIENT ⁵ RECOVERY ⁴	—	—	±300	—	±200	±300	—	±400	±500	—	±500	±600	—	±500	—	mV pk
		—	—	300	—	—	300	—	—	300	—	—	300	—	300	—	μs
START-UP ¹	DELAY	—	1.4	5	—	1.4	5	—	1.4	5	—	1.4	5	—	—	5	ms
	OVERSHOOT	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	mV pk
	FULL LOAD	—	0	50	—	0	50	—	0	120	—	0	150	—	0	—	
	NO LOAD	—	33	150	—	50	250	—	120	600	—	150	750	—	—	—	

Notes

1. Tc = -55°C to +100°C
2. Operation is limited below 16V.
3. Indefinite short circuit protection not guaranteed above 100°C case.

4. Recovery time is measured from application of the transient to point at which Vout is within 1% of final value.
5. Transition time ≥ 10 μs.

FILTERED CONFIGURABLE DC/DC CONVERTERS

30 Watt Dual Output Modules

MFC SERIES
UP TO 30 WATTS

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.

DUAL OUTPUT MODULES		05D			12D			15D			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE	+V _{OUT}	4.95	5.00	5.05	11.88	12.00	12.12	14.85	15.00	15.15	VDC
	-V _{OUT}	4.92	5.00	5.07	11.82	12.00	12.18	14.77	15.00	15.23	
OUTPUT CURRENT ^{1, 2}	V _{IN} = 16 TO 40 VDC	0	2.5	4.5	0	1.25	2.25	0	1.0	1.8	A
OUTPUT POWER ^{1, 2}	V _{IN} = 16 TO 40 VDC	0	—	25	0	—	30	0	—	30	W
OUTPUT RIPPLE VOLTAGE	10 kHz - 2 MHz	—	20	50	—	30	80	—	25	80	mV p-p
	Tc = -55°C TO +125°C	—	40	80	—	40	120	—	40	120	
LINE REGULATION ³ V _{IN} = 16 TO 40 VDC	+V _{OUT}	—	10	50	—	10	30	—	10	30	mV
	-V _{OUT}	—	50	100	—	50	120	—	50	150	
	Tc = -55°C +V _{OUT}	—	10	50	—	10	50	—	10	50	
	TO +125°C -V _{OUT}	—	50	100	—	50	150	—	50	180	
LOAD REGULATION NO LOAD TO FULL	+V _{OUT}	—	5	30	—	15	30	—	15	30	mV
	-V _{OUT}	—	25	50	—	30	120	—	30	150	
	Tc = -55°C +V _{OUT}	—	5	50	—	15	50	—	15	50	
	TO +125°C -V _{OUT}	—	25	100	—	30	180	—	30	180	
CROSS REGULATION	SEE NOTE 4	—	7	12	—	4	8.3	—	3	8	%
EFFECT ON -V _{OUT}	SEE NOTE 5	—	4	6	—	4	6	—	4	6	
INPUT VOLTAGE ¹	CONTINUOUS	16	28	40	16	28	40	16	28	40	VDC
NO LOAD TO FULL	TRANSIENT 50 ms	0	—	50	0	—	50	0	—	50	V
INPUT CURRENT	NO LOAD	—	35	75	—	50	75	—	50	75	mA
	FULL LOAD	—	1.10	—	—	1.34	—	—	1.29	—	A
	INHIBITED	—	3	8	—	3	8	—	3	8	mA
INPUT RIPPLE CURRENT ¹	10 kHz - 10 MHz	—	15	50	—	20	50	—	20	50	mA p-p
EFFICIENCY		76	78	—	78	81	—	80	83	—	%
LOAD FAULT ⁶	POWER DISSIPATION	—	—	10	—	—	10	—	—	10	W
	SHORT CIRCUIT ¹	—	—	10	—	—	10	—	—	10	
	RECOVERY	—	1.4	5.0	—	1.4	5.0	—	1.4	5.0	ms
STEP LOAD RESPONSE ± V _{OUT}	50 – 100 – 50% BALANCED	—	±200	±300	—	±150	±300	—	±200	±400	mV pk
	TRANSIENT	—	±200	±300	—	±150	±300	—	±200	±400	
	RECOVERY ⁷	—	100	200	—	100	200	—	100	200	µs
STEP LINE RESPONSE ± V _{OUT}	16 – 40 – 16 V _{IN}	—	±200	±400	—	±200	±400	—	±400	±500	mV pk
	TRANSIENT ⁸	—	±200	±400	—	±200	±400	—	±400	±500	
	RECOVERY ⁷	—	—	300	—	—	300	—	—	300	µs
START-UP ¹	DELAY	—	1.4	5	—	1.4	5	—	1.4	5	ms
	OVERSHOOT	—	0	50	—	0	120	—	0	150	mV pk
	FULL LOAD	—	0	50	—	0	120	—	0	150	
	NO LOAD	—	50	250	—	120	600	—	150	750	

Notes

1. Tc = -55°C to +100°C.
2. Up to 90% of the total output current/power is available from either output providing the positive output is carrying at least 10% of the total output power.
3. Operation is limited below 16 V (see Figure 21).
+P_{out} 20% to 80%; -P_{out} 80% to 20%
5. Effect on the negative output under the following conditions:
+P_{out} 50%; -P_{out} 10% to 50%
6. Indefinite short circuit protection not guaranteed above 100°C case.
7. Recovery time is measured from application of the transient to point at which V_{out} is within 1% of final value.
8. Transition time ≥ 10 µs.

MFC SERIES UP TO 30 WATTS

FILTERED CONFIGURABLE DC/DC CONVERTERS

15 Watt Single Output Modules

ABSOLUTE MAXIMUM RATINGS

Input Voltage

- 16 to 40 VDC

Power Dissipation (Pd)

- 6 W

Output Power

- 12 to 15 watts depending on model

Lead Soldering Temperature (10 sec per lead)

- 300°C

Storage Temperature Range (Case)

- -65°C to +150°C

SYNC AND INHIBIT

Sync In (500 to 600 kHz)

- Duty cycle 40% to 60%
- Logic low 0.8 V max
- Logic high 4.5 V min, 5 V max
- Referenced to input common
- If not used, connect to input common

Inhibit TTL Open Collector

- Logic low (output disabled)
Logic low voltage ≤ 0.8 V
Inhibit pin current 4.0 mA max
- Referenced to input common
- Logic high (output enabled)
Open collector or unconnected

TYPICAL CHARACTERISTICS

Output Voltage Temperature Coefficient

- 100 ppm /°C typical
- 150 ppm/°C maximum

Input to Output Capacitance

- 60 pF typical

Undervoltage Lockout

- 12 V input typical

Current Limit

- 115% of full load typical

Isolation

- 100 megohm minimum at 500 V

Audio Rejection

- 50 dB typical

Conversion Frequency (°55°C to +100°C Tc)

- Free run 550 kHz typical
480 kHz min, 620 kHz max

Inhibit Pin Voltage (unit enabled)

- 8.5 to 12 V

RECOMMENDED OPERATING CONDITIONS

Input Voltage Range

- 16 to 40 VDC continuous
- 0 V for up to 50 msec transient

Case Operating Temperature (Tc)

- -55°C to +100°C full power
- -55°C to +115°C absolute

Derating Output Power/Current (Tc)

- Linearly from 100% at 100°C to 0% at 115°C

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.

SINGLE OUTPUT MODULES		3R3S			05S			5R2S			UNITS
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE		3.27	3.30	3.33	4.95	5.00	5.05	5.16	5.20	5.24	VDC
OUTPUT CURRENT	$V_{IN} = 16$ to 40 VDC	0	—	2.4	0	—	2.4	0	—	2.4	A
OUTPUT POWER	$V_{IN} = 16$ to 40 VDC	0	—	8	0	—	12	0	—	12.48	W
OUTPUT RIPPLE	10 kHz - 2 MHz	—	30	80	—	30	80	—	30	50	mV p-p
VOLTAGE	$T_c = -55^\circ\text{C}$ to $+100^\circ\text{C}$	—	50	120	—	60	100	—	60	100	mV
LINE REGULATION	$V_{in} = 16$ to 40 VDC	—	5	100	—	5	50	—	5	35	mV
LOAD REGULATION	NO LOAD TO FULL	—	20	50	—	20	50	—	20	35	mV
INPUT VOLTAGE	CONTINUOUS	16	28	40	16	28	40	16	28	40	VDC
NO LOAD TO FULL	TRANSIENT 50 ms	—	—	50	—	—	50	—	—	50	V
INPUT CURRENT	NO LOAD	—	25	65	—	25	40	—	25	42	mA
	FULL LOAD	—	—	397	—	560	624	—	560	605	
	INHIBITED	—	5	12	—	5	12	—	5	12	
INPUT RIPPLE	10 kHz - 10 MHz	—	45	80	—	35	80	—	35	100	mA pp
CURRENT	$T_c = -55^\circ\text{C}$ to $+100^\circ\text{C}$	—	—	120	—	—	100	—	—	120	
EFFICIENCY		72	75	—	75	77	—	75	77	—	%
LOAD FAULT ¹	SHORT CIRCUIT	—	—	—	—	—	—	—	—	—	W
	POWER DISSIPATION	—	5	8	—	3.5	6	—	.35	6	
	RECOVERY ²	—	7.5	30	—	7.5	30	—	7.5	30	
STEP LOAD RESP.	50% - 100% - 50%	—	—	—	—	—	—	—	—	—	mV pk
	TRANSIENT	-400	150	500	-400	150	400	-400	150	400	
	RECOVERY ²	—	150	300	—	150	300	—	150	300	
STEP LINE RESP.	16 - 40 - 40 VDC	—	—	—	—	—	—	—	—	—	mV pk
	TRANSIENT ³	-800	550	800	-800	550	800	-800	550	800	
	RECOVERY ²	—	0.8	1.2	—	0.8	1.2	—	0.8	1.2	
START-UP	DELAY	—	10	25	0	10	25	0	10	18	ms
	OVERSHOOT ⁴	0	200	300	0	100	600	0	100	300	mV pk

Notes

1. Indefinite short circuit protection not guaranteed above 100°C (case)
2. Recovery time is measured from application of the transient to point at which Vout is within regulation.

3. Input step transition time $>10\mu\text{s}$.
4. Input step transition time $<100\mu\text{s}$.

FILTERED CONFIGURABLE DC/DC CONVERTERS

15 Watt Single Output Modules

MFC SERIES
UP TO 30 WATTS

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.

SINGLE OUTPUT MODULES		12S			15S			28S			UNITS
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE		11.88	12.00	12.12	14.85	15.00	15.15	27.72	28.00	28.28	VDC
OUTPUT CURRENT	$V_{IN} = 16$ to 40 VDC	0	—	1.25	0	—	1.00	0	—	0.54	A
OUTPUT POWER	$V_{IN} = 16$ to 40 VDC	0	—	15	0	—	15	0	—	15	W
OUTPUT RIPPLE VOLTAGE	10 kHz - 2 MHz	—	30	80	—	30	80	—	60	120	mV p-p
	$T_c = -55^{\circ}\text{C}$ to $+100^{\circ}\text{C}$	—	50	120	—	50	120	—	100	180	
LINE REGULATION	$V_{in} = 16$ to 40 VDC	—	5	50	—	5	50	—	50	150	mV
LOAD REGULATION	NO LOAD TO FULL	—	20	50	—	20	50	—	50	150	mV
INPUT VOLTAGE	CONTINUOUS	16	28	40	16	28	40	16	28	40	VDC
NO LOAD TO FULL	TRANSIENT 50 ms	—	—	50	—	—	50	—	—	50	V
INPUT CURRENT	NO LOAD	—	25	50	—	25	62	—	25	60	mA
	FULL LOAD	—	680	752	—	670	752	—	640	760	
	INHIBITED	—	5	12	—	5	12	—	5	12	
INPUT RIPPLE CURRENT	10 kHz - 10 MHz	—	35	80	—	35	80	—	35	80	mA pp
	$T_c = -55^{\circ}\text{C}$ to $+100^{\circ}\text{C}$	—	—	120	—	—	120	—	—	120	
EFFICIENCY		78	79	—	78	80	—	82	84	—	%
LOAD FAULT ¹	SHORT CIRCUIT	—	—	—	—	—	—	—	—	—	W
	POWER DISSIPATION	—	3.5	6	—	3.5	6	—	3.5	6	
	RECOVERY ²	—	7.5	30	—	7.5	30	—	7.5	30	ms
STEP LOAD RESP.	50% – 100% – 50%	—	—	—	—	—	—	—	—	—	mV pk
	TRANSIENT	–500	150	500	–600	200	600	–800	600	800	
	RECOVERY ²	—	150	300	—	150	300	—	200	400	
STEP LINE RESP.	16 – 40 – 40 VDC	—	—	—	—	—	—	—	—	—	mV pk
	TRANSIENT ³	–800	550	800	–800	550	800	–1200	1100	1200	
	RECOVERY ²	—	0.8	1.2	—	0.8	1.2	—	0.8	1.2	
START-UP	DELAY	0	10	25	0	10	25	0	10	25	ms
	OVERSHOOT ⁴	0	200	1200	0	200	1500	0	200	280	mV pk

Notes

1. Indefinite short circuit protection not guaranteed above 100°C (case)
2. Recovery time is measured from application of the transient to point at which Vout is within regulation.
3. Input step transition time >10µs.
4. Input step transition time <100µs.

MFC SERIES UP TO 30 WATTS

FILTERED CONFIGURABLE DC/DC CONVERTERS

15 Watt Dual Output Modules

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, free run, unless otherwise specified.

DUAL OUTPUT MODULES		05D			12D			15D			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE	+V _{OUT}	4.95	5.00	5.05	11.88	12.00	12.12	14.85	15.00	15.15	VDC
	-V _{OUT}	4.92	5.00	5.08	11.82	12.00	12.18	14.78	15.00	15.23	
OUTPUT CURRENT ¹	V _{IN} = 16 to 40 VDC	—	±1.2	1.92	—	±0.625	1.125	—	±0.500	0.900	A
OUTPUT POWER ¹	V _{IN} = 16 to 40 VDC	—	—	12	—	—	15	—	—	15	W
OUTPUT RIPPLE VOLTAGE ±V _{OUT}	10 kHz - 2 MHz	—	30	80	—	30	80	—	30	80	mV p-p
	Tc = -55°C to +100°C	—	60	120	—	60	120	—	50	120	
LINE REGULATION Vin = 16 to 40 VDC	BALANCED +V _{OUT}	—	5	50	—	5	50	—	5	50	mV
	LOAD -V _{OUT}	—	—	80	—	—	100	—	—	100	
LOAD REGULATION	BALANCED +V _{OUT}	—	20	50	—	20	50	—	20	50	mV
	LOAD -V _{OUT}	—	—	100	—	—	100	—	—	100	
CROSS REGULATION ²	NEGATIVE V _{OUT}	—	6	7.5	—	3	6	—	3	6	%
INPUT VOLTAGE	CONTINUOUS	16	28	40	16	28	40	16	28	40	VDC
NO LOAD TO FULL	TRANSIENT 50 msec	—	—	50	—	—	50	—	—	50	V
INPUT CURRENT	NO LOAD	—	20	40	—	25	50	—	25	50	mA
	FULL LOAD	—	540	600	—	645	754	—	638	754	
	INHIBITED	—	6	12	—	5	12	—	5	12	
INPUT RIPPLE CURRENT	10 kHz - 10 MHz	—	20	50	—	35	60	—	35	60	mA p-p
	Tc = -55°C to +100°C	—	40	80	—	50	100	—	50	100	
EFFICIENCY		77	79	—	76	83	—	76	84	—	%
LOAD FAULT	SHORT CIRCUIT ³	—	—	—	—	—	—	—	—	—	W
	POWER DISSIPATION	—	3	6	—	3	6	—	3	6	
	RECOVERY ⁴	—	7.5	30	—	7.5	50	—	7.5	50	ms
STEP LOAD RESP. ⁵	50% - 100% - 50%	—	—	—	—	—	—	—	—	—	mV pk
	TRANSIENT +V _{OUT}	-600	200	600	-600	300	600	-600	300	600	
	-V _{OUT}	-600	150	600	-600	100	500	-600	100	600	
	RECOVERY ⁴	—	150	500	—	200	400	—	200	500	
STEP LINE RESP. ± V _{OUT}	16 - 40 - 40 VDC	—	—	—	—	—	—	—	—	—	mV pk
	TRANSIENT ⁶	-800	600	800	-750	550	750	-750	550	750	
	RECOVERY ⁴	—	0.8	1.2	—	0.8	1.2	—	0.8	1.2	ms
START-UP	DELAY	—	12	20	—	12	25	—	12	25	ms
	OVERSHOOT ⁷	0	100	250	0	200	750	0	200	750	mV pk

Notes

- Up to 13.5 watts, 90% (9.6W, 80% for 2805D) of the total output power is available from either output providing the opposite output is simultaneously carrying 10% (20% for 2805D) of the total output power. Each output must carry a minimum of 10% (20% for 2805D) of the total output power in order to maintain regulation on the negative outputs.
- Effect on -V_{out} for the following conditions:
+Po = 50% to 10% and -Po = 50%
+Po = 50% and -Po = 50% to 10%
- Indefinite short circuit protection not guaranteed above 100°C (case)
- Recovery time is measured from application of the transient to point at which V_{out} is within regulation.
- Response of either output with the opposite output held at half of the total output power.
- Input step transition time >10μs.
- Input step transition time <100μs.

FILTERED CONFIGURABLE DC/DC CONVERTERS

5 Watt Single Output Modules

MFC SERIES
UP TO 30 WATTS

ABSOLUTE MAXIMUM RATINGS

- Input Voltage**
- 16 to 40 V
- Output Power**
- 5 watts
- Lead Soldering Temperature (10 sec per lead)**
- 300°C
- Storage Temperature Range (Case)**
- -65°C to +135°C

INHIBIT

- Inhibit TTL Open Collector**
- Logic low (output disabled)
 - Logic low voltage ≤ 0.8 V
 - Inhibit pin current 4 mA max
 - Referenced to input common
 - Logic high (output enabled)
 - Open collector

RECOMMENDED OPERATING CONDITIONS

- Input Voltage Range**
- 16 to 40 VDC continuous
 - 50 V for up to 50 msec transient
- Case Operating Temperature (Tc)**
- -55°C to +100°C full power
 - -55°C to +115°C absolute
- Derating Output Power/Current (Tc)**
- Linearly from 100% at 100°C to 0% at 115°C

TYPICAL CHARACTERISTICS

- Output Voltage Temperature Coefficient**
- 100 ppm/°C typical
- Input to Output Capacitance**
- 50 pF typical
- Isolation**
- 100 megohm minimum at 500 V
- Audio Rejection**
- 50 dB typical
- Conversion Frequency**
- 550 kHz typical (400 kHz 60 V model)
 - 450 kHz min, 600 kHz max
 - 350 kHz min, 450 kHz max 60 V model
- Inhibit Pin Voltage (unit enabled)**
- 9 to 11 V

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, unless otherwise specified.

SINGLE OUTPUT MODULES		5S			5R2S			12S			15S			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE	Tc = -55°C TO +100°C	4.95	5.00	5.05	5.15	5.20	5.25	11.88	12.00	12.12	14.85	15.00	15.15	VDC
OUTPUT CURRENT	Tc = -55°C TO +100°C	V _{IN} = 16 TO 40 VDC			V _{IN} = 16 TO 40 VDC			V _{IN} = 16 TO 40 VDC			V _{IN} = 16 TO 40 VDC			mA
		0	—	1000	0	—	962	0	—	417	0	—	333	
OUTPUT POWER	Tc = -55°C TO +100°C	V _{IN} = 16 TO 40 VDC			V _{IN} = 16 TO 40 VDC			V _{IN} = 16 TO 40 VDC			V _{IN} = 16 TO 40 VDC			W
		—	—	5	—	—	5	—	—	5	—	—	5	
OUTPUT RIPPLE VOLTAGE	10 kHz - 2 MHz	—	125	350	—	110	335	—	50	200	—	50	170	mV p-p
LINE REGULATION	V _{IN} = 16 TO 40 VDC Tc = -55°C TO +100°C	—	10	50 ¹	—	10	50	—	10	50	—	10	50	mV
LOAD REGULATION	NO LOAD TO FULL Tc = -55°C TO +100°C	—	10	50	—	10	50	—	10	50	—	10	50	mV
INPUT VOLTAGE NO LOAD TO FULL	Tc = -55°C TO +100°C CONTINUOUS	16	28	40	16	28	40	16	28	40	16	28	40	VDC
	TRANSIENT 50 ms	0	—	50	0	—	50	0	—	50	0	—	50	V
INPUT CURRENT	NO LOAD	—	27	40	—	28	40	—	29	42	—	31	44	mA
	FULL LOAD	—	250	—	—	250	—	—	235	—	—	235	—	
	INHIBITED	—	3	4	—	3	4	—	3	4	—	3	4	
INPUT RIPPLE CURRENT	10 kHz - 10 MHz Tc = -55°C TO +100°C	—	25	100	—	25	100	—	25	100	—	25	100	mA p-p
		—	30	150	—	30	150	—	30	150	—	30	150	
EFFICIENCY		66	71	—	66	71	—	70	76	—	71	76	—	%
LOAD FAULT ^{2, 3}	POWER DISSIPATION	—	1.5	2.0	—	1.5	2.0	—	1.2	1.9	—	1.2	1.8	W
SHORT CIRCUIT	RECOVERY	—	12.5	25	—	1.5	25	—	1	10	—	1	10	ms
STEP LOAD RESPONSE ^{3, 4}	50% - 100% - 50% TRANSIENT	—	100	250	—	100	250	—	150	375	—	200	500	mV pk
	RECOVERY	—	100	250	—	100	250	—	200	500	—	200	500	μs
STEP LINE RESPONSE ^{3, 4}	TRANSIENT 16 TO 40 V _{IN}	—	50	150	—	50	150	—	80	200	—	50	125	mV pk
	40 TO 16 V _{IN}	—	50	150	—	50	150	—	100	250	—	50	125	
	RECOVERY 16 TO 40 V _{IN}	—	100	250	—	100	250	—	250	625	—	250	625	μs
	40 TO 16 V _{IN}	—	200	500	—	200	500	—	250	625	—	250	625	
START-UP	DELAY	—	10	25	—	10	25	—	3	10	—	3	10	ms
	OVERSHOOT	—	0	50	—	0	50	—	0	120	—	0	150	mV pk

Notes

1. Line regulation for /ES and non /ES 2805S models at 16 to 17 V_{IN} and 85°C to 100°C (case) is 5% (max).
2. Indefinite short circuit protection not guaranteed above 100°C (case).
3. Recovery time is measured from application of the transient to point at which V_{OUT} is within 1% of V_{OUT} at final value.
4. Transition time >10μs.

MFC SERIES UP TO 30 WATTS

FILTERED CONFIGURABLE DC/DC CONVERTERS

5 Watt Dual Output Modules

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, unless otherwise specified.

DUAL OUTPUT MODULES		05D			12D			15D			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE	+V _{OUT}	4.95	5.00	5.05	11.88	12.00	12.12	14.85	15.00	15.15	VDC
	-V _{OUT}	4.9	5.0	5.1	11.76	12.00	12.24	14.70	15.00	15.30	
OUTPUT CURRENT ¹	V _{IN} = 16 to 40 VDC Tc = -55°C to +125°C	—	±500	800	—	±208	333	—	±167	267	mA
OUTPUT POWER ¹	V _{IN} = 16 to 40 VDC Tc = -55°C to +125°C	—	—	5	—	—	5	—	—	5	W
OUTPUT RIPPLE VOLT.	10 kHz - 2 MHz	—	—	150	—	40	140	—	60	150	mV p-p
LINE REGULATION Vin = 16 to 40 VDC	Tc = -55°C to +125°C	—	—	—	—	—	—	—	—	—	mV
	+V _{OUT}	—	10	25	—	10	50	—	10	50	
	-V _{OUT}	—	40	75	—	40	180	—	40	180	
LOAD REGULATION NO LOAD TO FULL	Tc = -55°C to +125°C	—	—	—	—	—	—	—	—	—	mV
	+V _{OUT}	—	10	50	—	10	50	—	10	50	
	-V _{OUT}	—	50	200	—	50	200	—	50	200	
CROSS REGULATION ²	+P _O = 20 - 80 %, -P _O = 80 - 20%	—	10	20	—	8	15	—	7	15	%
	-P _O = 20 - 80 %, +P _O = 80 - 20%	—	—	—	—	—	—	—	—	—	
	+P _O = 50 - 10 %, -P _O = 50%	—	5	8	—	3.7	6	—	3	6	
INPUT VOLTAGE Tc = -55°C to +125°	NO LOAD TO FULL	16	28	40	16	28	40	16	28	40	VDC
	CONTINUOUS	—	—	—	—	—	—	—	—	—	V
	TRANSIENT 50 msec	—	—	50	—	—	50	—	—	50	
INPUT CURRENT Tc = -55°C to +125°C	NO LOAD	—	30	35	—	33	58	—	38	60	mA
	FULL LOAD	—	248	—	—	235	—	—	235	—	
	INHIBITED	—	3	5	—	3	4	—	3	4	
INPUT RIPPLE CURRENT	10 kHz TO 10 MHz	—	25	80	—	25	100	—	25	100	mA p-p
	Tc = -55°C to +125°C	—	30	160	—	30	150	—	30	150	
EFFICIENCY		68	72	—	69	75	—	70	75	—	%
LOAD FAULT ^{3, 4}	POWER DISSIPATION	—	1.3	1.8	—	1.3	1.7	—	1.3	1.6	W
	SHORT CIRCUIT	—	—	50	—	1	10	—	1	10	ms
STEP LOAD RESPONSE ^{4, 5}	50% - 100% - 50% BALANCED	—	—	—	—	—	—	—	—	—	mV
	TRANSIENT	—	—	±150	—	±300	±750	—	±300	±750	
	RECOVERY	—	—	100	—	200	500	—	500	1250	
STEP LINE RESP. ^{4, 5}	TRANSIENT 16 TO 40 VDC	—	—	±750	—	±50	±125	—	±150	±375	mV pk
	40 TO 16 VDC	—	—	±500	—	±50	±125	—	±100	±250	
	RECOVERY 16 TO 40 VDC	—	—	1200	—	150	375	—	250	625	μs
	40 TO 16 VDC	—	—	1200	—	400	1000	—	800	2000	
START-UP	DELAY	—	—	25	—	3	10	—	3	10	ms
	OVERSHOOT	—	—	500	—	0	120	—	0	150	mV pk

Notes

- Up to 4 watts (80% full power) is available from either output providing the opposite output is carrying 20% of total power.
- Shows regulation effect on the minus output during the defined cross loading conditions. See Figures 15 and 16.
- Indefinite short circuit protection not guaranteed above 100°C (case).
- Recovery time is measured from application of the transient to point at which V_{OUT} is within 1% of V_{OUT} at final value.
- Transition time >10μs.

FILTERED CONFIGURABLE DC/DC CONVERTERS

MFC SERIES

1.5 Watt Single Output Modules

UP TO 30 WATTS

ABSOLUTE MAXIMUM RATINGS

Input Voltage

- 12 to 50 VDC

Output Power

- 1.5 W

Capacitive Load

- Single output models 200 μ F
- Dual output models 100 μ F

Lead Soldering Temperature (10 sec per lead)

- 300°C

Storage Temperature Range (Case)

- -65°C to +150°C

INHIBIT

Inhibit – TTL Open Collector

- Logic low (output disabled) 0.8 V max
- Inhibit pin current 1 mA max
- Referenced to input common
- Logic high (output enabled) open collector

RECOMMENDED OPERATING CONDITIONS

Input Voltage Range

- 12 to 50 VDC continuous
- 80 V for 120 msec transient
- (70 V for 15 V single and dual models)

Case Operating Temperature (Tc)

- -55°C to +100°C full power
- -55°C to +115°C absolute

Derating Output Power/Current (Tc)

- Linearly from 100% at 100°C to 0% at 115°C

TYPICAL CHARACTERISTICS

Output Voltage Temperature Coefficient

- 100 ppm/°C typical

Input to Output Capacitance

- 100 to 170 pF typical

Undervoltage Lockout

- 8 V input typical

Current Limit

- 125% of full load typical

Isolation

- 100 megohm minimum at 500 V

Audio Rejection 40 dB, typical

Conversion Frequency (kHz)

- 25°C, 300 min, 370 typ, 450 max
- -55°C to +100°C
- 270 min, 370 typ, 470 max

Inhibit Pin Voltage (unit enabled)

- 7 to 12 V

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, unless otherwise specified.

SINGLE OUTPUT MODULES		3R3S			05S			5R2S			12S			15S			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE ¹	Tc = 25°C				4.95	5	5.05	5.15	5.2	5.25	11.88	12	12.12	14.85	15	15.15	VDC
	Tc = -55°C TO +100°C				4.80	5	5.20	5.00	5.2	5.40	11.52	12	12.48	14.40	15	15.60	
OUTPUT CURRENT	V _{IN} = 12 to 50 VDC				0	—	300	0	—	288	0	—	125	0	—	100	mA
OUTPUT POWER	V _{IN} = 12 to 50 VDC				0	—	1.5	0	—	1.5	0	—	1.5	0	—	1.5	W
OUTPUT RIPPLE VOLTAGE	10 kHz - 2 MHz				—	45	150	—	45	150	—	50	200	—	35	150	mV p-p
	Tc = -55°C TO +100°C				—	65	300	—	65	300	—	70	300	—	50	250	
LINE REGULATION	V _{IN} = 12 TO 50 VDC				—	35	100	—	35	100	—	60	200	—	70	300	mV
	Tc = -55°C TO +100°C				—	40	120	—	40	120	—	70	250	—	80	350	
LOAD REGULATION	10% TO FULL LOAD				—	350	700	—	350	700	—	600	1300	—	700	1500	mV
	Tc = -55°C TO +100°C				—	380	800	—	380	800	—	640	1400	—	760	1600	
	50% TO FULL				—	100	200	—	100	200	—	145	300	—	165	350	
	Tc = -55°C TO +100°C				—	115	300	—	115	300	—	160	400	—	185	450	
INPUT VOLTAGE	CONTINUOUS				12	28	50	12	28	50	12	28	50	12	28	50	VDC
	TRANSIENT 120 ms				0	—	80	0	—	80	0	—	80	0	—	70	V
NO LOAD TO FULL INPUT CURRENT	NO LOAD				—	5.5	10	—	5.5	10	—	6	10	—	6.0	11	mA
	Tc = -55°C TO +100°C				—	6.0	11	—	6.0	11	—	6.5	12	—	6.5	12	
	FULL LOAD				—	70	74	—	70	74	—	68	72	—	68	72	
	Tc = -55°C TO +100°C				—	73	78	—	73	78	—	70	74	—	70	74	
	INHIBITED				—	2.3	3.2	—	2.3	3.2	—	2.3	3.2	—	2.3	3.2	mA
	Tc = -55°C TO +100°C				—	2.4	3.5	—	2.4	3.5	—	2.4	3.5	—	2.4	3.5	
INPUT RIPPLE CURRENT ²	10k Hz - 10 MHz				—	100	200	—	100	200	—	100	200	—	100	200	mA p-p
EFFICIENCY	Tc = 25°C				72	77	—	75	77	—	74	79	—	74	79	—	%
	Tc = -55°C TO +100°C				69	75	—	69	75	—	72	77	—	72	77	—	
LOAD FAULT ^{3, 4}	POWER DISSIPATION				—	1.3	2.0	—	1.3	2.0	—	2.0	3.2	—	2.3	3.7	W
	Tc = -55°C TO +100°C				—	1.4	2.3	—	1.4	2.3	—	2.2	3.5	—	2.5	4.0	
	RECOVERY				—	3.0	12	—	3.0	12	—	3.5	15	—	4.0	18	ms
	Tc = -55°C TO +100°C				—	3.5	15	—	3.5	15	—	3.5	20	—	4.0	20	
STEP LOAD RESPONSE ⁵	50 %-100%- 50% LOAD TRANSIENT				-400	185	400	-400	185	400	-700	350	700	-700	350	700	mV pk
	Tc = -55°C TO +100°C				-500	185	500	500	185	500	-800	380	800	-800	380	800	
	RECOVERY				—	125	500	—	125	500	—	130	500	—	140	600	μ s
	Tc = -55°C TO +100°C				—	125	600	—	125	600	—	130	600	—	180	750	
STEP LINE RESPONSE ⁵	12 TO 50 TO 12 V _{IN} TRANSIENT				-400	170	400	-400	170	400	-900	400	900	-750	400	750	mV pk
	Tc = -55°C TO +100°C				-500	180	500	-500	180	500	-1000	400	1000	-850	450	850	
	RECOVERY				—	0.75	3.0	—	0.75	3.0	—	0.6	2.5	—	0.47	2.0	ms
	Tc = -55°C TO +100°C				—	0.75	4.0	—	0.75	4.0	—	0.6	3.0	—	0.5	2.5	
START-UP 0 TO 28 VDC	DELAY				—	7	20	—	7	20	—	7	20	—	7	20	ms
	Tc = -55°C TO +100°C				—	10	40	—	10	40	—	10	40	—	10	40	
	OVERSHOOT				—	0	100	—	0	100	—	0	250	—	0	300	mV pk
	Tc = -55°C TO +100°C				—	0	150	—	0	150	—	0	350	—	0	450	

See notes 1, 2, 3, 4, 5, and 6 on the following page.

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, unless otherwise specified.

DUAL OUTPUT MODULES		5D			12D			15D			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE ¹	Tc = 25°C Tc = -55°C TO +100°C	±4.95 ±4.80	±5 ±5	±5.05 ±5.20	±11.88 ±11.52	±12 ±12	±12.12 ±12.48	±14.85 ±14.40	±15 ±15	±15.15 ±15.60	VDC
OUTPUT CURRENT ⁶	VIN = 12 TO 50 VDC	0	±150	240	0	±62.5	100	0	±50	80	mA
OUTPUT POWER	VIN = 12 TO 50 VDC	0	—	1.5	0	—	1.5	0	—	1.5	W
OUTPUT RIPPLE VOLTAGE +VOUT -VOUT	10 kHz - 2 MHz Tc = -55°C TO +100°C	—	35	150	—	35	150	—	30	150	mV p-p
	Tc = -55°C TO +100°C	—	50	250	—	40	250	—	35	250	
	10 kHz - 2 MHz Tc = -55°C TO +100°C	—	35	150	—	35	150	—	30	150	
LINE REGULATION ⁷	VIN = 12 TO 50 VDC Tc = -55°C TO +100°C	—	10	50	—	100	300	—	165	500	mV
	Tc = -55°C TO +100°C	—	20	100	—	110	400	—	180	650	
LOAD REGULATION ⁸ ±VOUT	10% TO FULL -55°C TO +100°C	—	300	600	—	550	1100	—	600	1300	mV
	-55°C TO +100°C	—	350	700	—	570	1200	—	630	1400	
	50% TO FULL -55°C TO +100°C	—	80	200	—	115	250	—	125	300	
	-55°C TO +100°C	—	100	300	—	130	350	—	135	400	
INPUT VOLTAGE NO LOAD TO FULL	CONTINUOUS	12	28	50	12	28	50	12	28	50	VDC
	TRANSIENT 120 ms	0	—	80	0	—	80	0	—	70	V
INPUT CURRENT	NO LOAD Tc = -55°C TO +100°C	—	5.0	10	—	7.5	13	—	7.5	13	mA
	FULL LOAD Tc = -55°C TO +100°C	—	6.0	12	—	8.0	14	—	8.0	14	
	INHIBITED Tc = -55°C TO +100°C	—	69	73	—	70	73	—	71	74	
	INHIBITED Tc = -55°C TO +100°C	—	72	77	—	71	77	—	72	78	
	INHIBITED Tc = -55°C TO +100°C	—	2.3	3.2	—	2.3	3.2	—	2.3	3.2	
INPUT RIPPLE ² CURRENT	10 kHz - 10 MHz Tc = -55°C TO +100°C	—	2.4	3.5	—	2.4	3.5	—	2.4	3.5	mA p-p
	10 kHz - 10 MHz Tc = -55°C TO +100°C	—	100	200	—	115	200	—	90	200	
EFFICIENCY	Tc = 25°C	73	77	—	73	77	—	72	76	—	%
	Tc = -55°C TO +100°C	70	75	—	70	75	—	69	74	—	
LOAD FAULT ^{3,4}	POWER DISSIPATION Tc = -55°C TO +100°C	—	1.4	2.2	—	2.5	3.8	—	2.7	4.1	W
	RECOVERY Tc = -55°C TO +100°C	—	1.6	2.5	—	2.7	4.2	—	3.0	4.5	
	RECOVERY Tc = -55°C TO +100°C	—	3.7	15	—	3.2	15	—	4.0	15	ms
	RECOVERY Tc = -55°C TO +100°C	—	3.8	20	—	3.2	20	—	4.0	20	
STEP LOAD RESPONSE ⁵ ± VOUT	50 %–100%– 50% LOAD TRANSIENT Tc = -55°C TO +100°C	–300	130	300	–600	250	600	–600	250	600	mV pk
	RECOVERY Tc = -55°C TO +100°C	–400	140	400	–700	260	700	–700	270	700	
	RECOVERY Tc = -55°C TO +100°C	—	100	400	—	165	700	—	50	200	µs
	RECOVERY Tc = -55°C TO +100°C	—	100	500	—	165	800	—	50	300	
STEP LINE RESPONSE ⁵ ± VOUT	12 TO 50 TO 12 VIN TRANSIENT Tc = -55°C TO +100°C	–250	125	250	–500	240	500	–500	220	500	mV pk
	RECOVERY Tc = -55°C TO +100°C	–300	130	300	–600	250	600	–600	230	600	
	RECOVERY Tc = -55°C TO +100°C	—	0.6	2.5	—	0.9	3.0	—	0.6	3.0	ms
	RECOVERY Tc = -55°C TO +100°C	—	0.6	3.0	—	0.9	4.0	—	0.7	4.0	
START-UP 0 TO 28 VDC, ± VOUT	DELAY Tc = -55°C TO +100°C	—	8	25	—	8	25	—	8	25	ms
	OVERSHOOT Tc = -55°C TO +100°C	—	10	45	—	10	45	—	10	45	
	OVERSHOOT Tc = -55°C TO +100°C	—	0	100	—	0	250	—	0	750	mV pk
	OVERSHOOT Tc = -55°C TO +100°C	—	0	150	—	0	350	—	0	900	


Notes:

- Specified at 50% load.
- Lin = 2 µH.
- Maximum duration of short circuit: 25°C—90 seconds, 100°C—30 seconds.
- Load fault is a short circuit (<50 mohms). Recovery is into resistive full load.
- Transition ≥ 10 µs. Recovery = time to settle to within 1% of Vout final value.

- Max. spec indicates 80% of the converter's total power, available from either output.
- Specification applies to both + and – Vout.
- Although no minimum load is required, at no load the output voltage may increase up to 15%.

MFC SERIES UP TO 30 WATTS

Pinouts will vary depending on customer choices.



Case Outline Drawings
Pinouts will vary depending on customer choices.

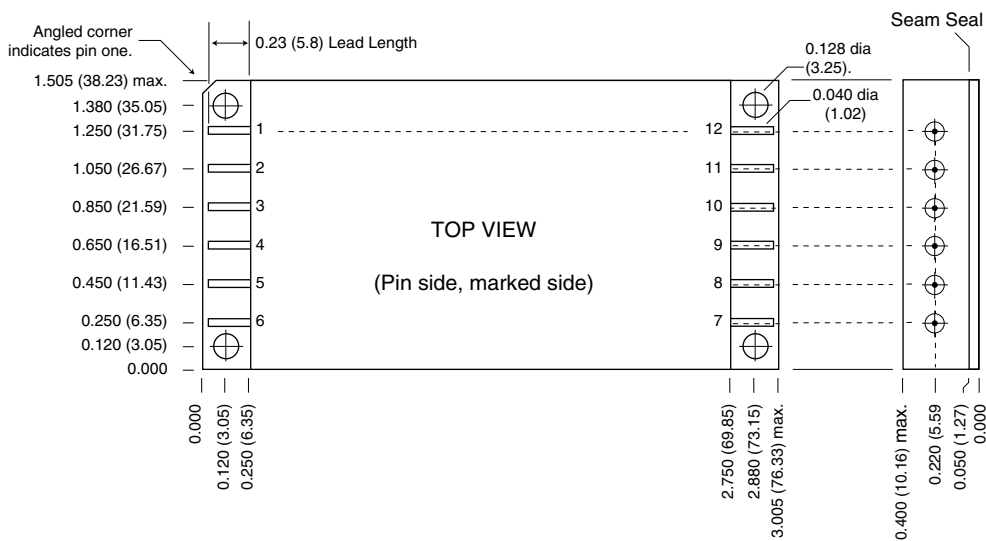


Figure 4: Case for F through H Options

Case size 3.005 x 1.500 x 0.400 inches, 76.33 x 38.23 x 10.16 mm

Table 4: ENVIRONMENTAL SCREENING

TEST	STANDARD	/ES
PRE-CAP INSPECTION Method 2017, 2032	no	yes
TEMPERATURE CYCLE (10 times) Method 1010, Cond. B, -55°C to 125°C	no	yes
CONSTANT ACCELERATION Method 2001, 500 g	no	yes
BURN-IN Method 1015, 96 hours at 100°C case	no	yes
FINAL ELECTRICAL TEST MIL-PRF-38534, Group A Subgroups 1 and 4: +25°C case	yes	yes
HERMETICITY TESTING Fine Leak, Method 1014, Cond. A Gross Leak, Method 1014, Cond. C Gross Leak, Dip (1 x 10 ⁻³)	no no yes	yes yes no
FINAL VISUAL INSPECTION Method 2009	yes	yes
Test methods are referenced to MIL-STD-883 as determined by MIL-PRF-38534.		

Contact Information:

www.interpoint.com

Interpoint Headquarters USA
Phone: 1-800-822-8782
+425-882-3100
Email: power@intp.com

Interpoint UK
Phone: +44-1252-815511
Email: poweruk@intp.com

Interpoint France
Phone: +33-134285455
Email: powerfr@intp.com