
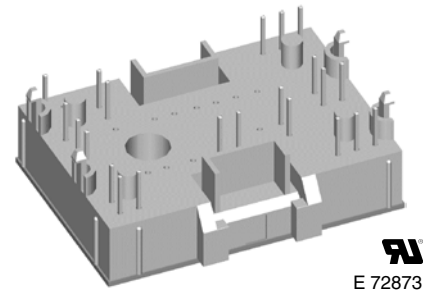


Converter - Brake - Inverter Module **Standard Trench IGBT**

Single Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600 \text{ V}$	$V_{CES} = 1200 \text{ V}$	$V_{CES} = 1200 \text{ V}$
$I_{DAVM25} = 90 \text{ A}$	$I_{C25} = 29 \text{ A}$	$I_{C25} = 29 \text{ A}$
$I_{FSM} = 300 \text{ A}$	$V_{CE(sat)} = 1.7 \text{ V}$	$V_{CE(sat)} = 1.7 \text{ V}$

Part name (Marking on product)

MITB15WB1200TMH

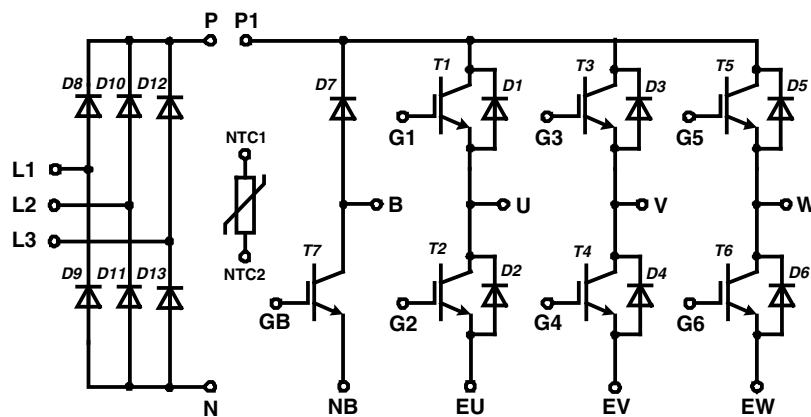

Pin configuration see outlines.

Features:

- High level of integration - only one power semiconductor module required for the whole drive
- Inverter with standard trench IGBTs
 - very low saturation voltage
 - positive temperature coefficient
 - short tail current
- Epitaxial free wheeling diodes with hiperfast soft reverse recovery
- Temperature sense included

Application:

- AC motor drives
- Pumps, Fans
- Washing machines
- Air-conditioning system
- Inverter and power supplies

Package:

- "Mini" package
- Assembly height is 17 mm
- Insulated base plate
- Pins suitable for wave soldering and PCB mounting
- Assembly clips available
 - IXKU 5-505 screw clamp
 - IXRB 5-506 click clamp
- UL registered E72873

Output Inverter T1 - T6

				Ratings		
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V _{CES}	collector emitter voltage	T _{VJ} = 150°C			1200	V
V _{GES}	max. DC gate voltage	continuous			±20	V
V _{GEM}	max. transient collector gate voltage	transient			±30	V
I _{C25}	collector current	T _C = 25°C			29	A
I _{C80}		T _C = 80°C			20	A
P _{tot}	total power dissipation	T _C = 25°C			100	W
V _{CE(sat)}	collector emitter saturation voltage	I _C = 15 A; V _{GE} = 15 V	T _{VJ} = 25°C T _{VJ} = 125°C	1.7 2.0	2.2	V V
V _{GE(th)}	gate emitter threshold voltage	I _C = 0.5 mA; V _{GE} = V _{CE}	T _{VJ} = 25°C	5	5.5	6.5 V
I _{CES}	collector emitter leakage current	V _{CE} = V _{CES} ; V _{GE} = 0 V	T _{VJ} = 25°C T _{VJ} = 125°C		0.6	mA mA
I _{GES}	gate emitter leakage current	V _{GE} = ±20 V			150	nA
C _{ies}	input capacitance	V _{CE} = 25 V; V _{GE} = 0 V; f = 1 MHz		1100		pF
Q _{G(on)}	total gate charge	V _{CE} = 600 V; V _{GE} = 15 V; I _C = 15 A		92		nC
t _{d(on)}	turn-on delay time	inductive load V _{CE} = 600 V; I _C = 15 A V _{GE} = ±15 V; R _G = 75 Ω	T _{VJ} = 25°C	55		ns
t _r	current rise time			30		ns
t _{d(off)}	turn-off delay time			320		ns
t _f	current fall time			200		ns
E _{on}	turn-on energy per pulse			1.2		mJ
E _{off}	turn-off energy per pulse			1.3		mJ
t _{d(on)}	turn-on delay time	inductive load V _{CE} = 600 V; I _C = 15 A V _{GE} = ±15 V; R _G = 75 Ω	T _{VJ} = 125°C	60		ns
t _r	current rise time			35		ns
t _{d(off)}	turn-off delay time			360		ns
t _f	current fall time			340		ns
E _{on}	turn-on energy per pulse			2		mJ
E _{off}	turn-off energy per pulse			1.7		mJ
RBSOA	reverse bias safe operating area	V _{GE} = ±15 V; R _G = 75 Ω; I _C = 30 A; T _{VJ} = 125°C	V _{CEK} ≤ V _{CES} - L _S ·di/dt			V
I _{SC} (SCSOA)	short circuit safe operating area	V _{CE} = 720 V; V _{GE} = ±15 V; R _G = 75 Ω; t _p = 10 μs; non-repetitive	T _{VJ} = 125°C	68		A
R _{thJC}	thermal resistance junction to case	(per IGBT)			1.2	K/W
R _{thCH}	thermal resistance case to heatsink			0.4		K/W

Output Inverter D1 - D6

Ratings							
Symbol	Definitions	Conditions	min.	typ.	max.	Unit	
V_{RRM}	<i>max. repetitive reverse voltage</i>		$T_{VJ} = 150^{\circ}\text{C}$		1200	V	
I_{F25}	<i>forward current</i>		$T_C = 25^{\circ}\text{C}$		24	A	
I_{F80}			$T_C = 80^{\circ}\text{C}$		16	A	
V_F	<i>forward voltage</i>	$I_F = 15\text{ A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	2.3 1.9	2.7	V V	
Q_{rr}	<i>reverse recovery charge</i>	$V_R = 600\text{ V}$ $di_F/dt = -420\text{ A}/\mu\text{s}$ $I_F = 15\text{ A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$	2.3		μC	
I_{RM}	<i>max. reverse recovery current</i>			19.6		A	
t_{rr}	<i>reverse recovery time</i>			330		ns	
E_{rec}	<i>reverse recovery energy</i>			0.68		mJ	
R_{thJC}	<i>thermal resistance junction to case</i>	(per diode)			0.55	1.6	K/W
R_{thCH}	<i>thermal resistance case to heatsink</i>						K/W

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated

Brake T7

				Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.	Unit	
V _{CES}	collector emitter voltage	T _{VJ} = 150°C			1200	V	
V _{GES}	max. DC gate voltage	continuous			±20	V	
V _{GEM}	max. transient collector gate voltage	transient			±30	V	
I _{C25}	collector current	T _C = 25°C			29	A	
I _{C80}		T _C = 80°C			20	A	
P _{tot}	total power dissipation	T _C = 25°C			100	W	
V _{CE(sat)}	collector emitter saturation voltage	I _C = 15 A; V _{GE} = 15 V	T _{VJ} = 25°C T _{VJ} = 125°C	1.7 2.0	2.2	V V	
V _{GE(th)}	gate emitter threshold voltage	I _C = 0.5 mA; V _{GE} = V _{CE}	T _{VJ} = 25°C	5	5.5	6.5	V
I _{CES}	collector emitter leakage current	V _{CE} = V _{CES} ; V _{GE} = 0 V	T _{VJ} = 25°C T _{VJ} = 125°C	0.8	0.6	mA mA	
I _{GES}	gate emitter leakage current	V _{GE} = ±20 V			150	nA	
C _{ies}	input capacitance	V _{CE} = 25 V; V _{GE} = 0 V; f = 1 MHz		1100		pF	
Q _{G(on)}	total gate charge	V _{CE} = 600 V; V _{GE} = 15 V; I _C = 15 A		92		nC	
t _{d(on)}	turn-on delay time	inductive load V _{CE} = 600 V; I _C = 15 A V _{GE} = ±15 V; R _G = 75 Ω	T _{VJ} = 25°C	55		ns	
t _r	current rise time			30		ns	
t _{d(off)}	turn-off delay time			320		ns	
t _f	current fall time			200		ns	
E _{on}	turn-on energy per pulse			1.0		mJ	
E _{off}	turn-off energy per pulse			1.3		mJ	
t _{d(on)}	turn-on delay time	inductive load V _{CE} = 600 V; I _C = 15 A V _{GE} = ±15 V; R _G = 75 Ω	T _{VJ} = 125°C	60		ns	
t _r	current rise time			35		ns	
t _{d(off)}	turn-off delay time			360		ns	
t _f	current fall time			340		ns	
E _{on}	turn-on energy per pulse			1.6		mJ	
E _{off}	turn-off energy per pulse			1.7		mJ	
RBSOA	reverse bias safe operating area	V _{GE} = ±15 V; R _G = 75 Ω; I _C = 30 A; T _{VJ} = 125°C	V _{CEK} ≤ V _{CES} - L _S ·di/dt			V	
I _{SC} (SCSOA)	short circuit safe operating area	V _{CE} = 720 V; V _{GE} = ±15 V; R _G = 75 Ω; t _p = 10 μs; non-repetitive	T _{VJ} = 125°C	68		A	
R _{thJC}	thermal resistance junction to case	(per IGBT)			1.2	K/W	
R _{thCH}	thermal resistance case to heatsink			0.4		K/W	

Brake Chopper D7

				Ratings		
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 150^{\circ}\text{C}$			1200	V
I_{F25}	forward current	$T_C = 25^{\circ}\text{C}$			15	A
I_{F80}		$T_C = 80^{\circ}\text{C}$			10	A
V_F	forward voltage	$I_F = 15\text{ A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	3.0 2.4	3.3	V V
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	0.2	0.1	mA mA
Q_{rr}	reverse recovery charge	$V_R = 600\text{ V}$ $di_F/dt = \text{tbd A}/\mu\text{s}$ $I_F = 10\text{ A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$	tbd		μC
I_{RM}	max. reverse recovery current			tbd		A
t_{rr}	reverse recovery time			tbd		ns
E_{rec}	reverse recovery energy			tbd		μJ
R_{thJC}	thermal resistance junction to case	(per diode)			2.5	K/W
R_{thCH}	thermal resistance case to heatsink			0.85		K/W

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

20070802

Input Rectifier Bridge D8 - D11

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 25^{\circ}\text{C}$			1600		V
I_{FAV}	average forward current	sine 180°	$T_C = 80^{\circ}\text{C}$		22		A
I_{DAVM}	max. average DC output current	rect.; $d = 1/3$	$T_C = 80^{\circ}\text{C}$		61		A
I_{FSM}	max. forward surge current	$t = 10 \text{ ms}$; sine 50 Hz	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		300 tbd		A A
I^2t	I^2t value for fusing	$t = 10 \text{ ms}$; sine 50 Hz	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		450 tbd		A^2s A^2s
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$		50		W
V_F	forward voltage	$I_F = 30 \text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	1.35 1.35	1.6		V V
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	0.3	0.01		mA mA
R_{thJC}	thermal resistance junction to case	(per diode)			2.1		K/W
R_{thCH}	thermal resistance case to heatsink	(per diode)		0.7			K/W


Temperature Sensor NTC

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
R_{25}	resistance	$T_C = 25^{\circ}\text{C}$	4.75	5.0	5.25		k Ω
$B_{25/50}$				3375			K

Module

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
T_{VJ}	operating temperature		-40		125		$^{\circ}\text{C}$
T_{VJM}	max. virtual junction temperature				150		$^{\circ}\text{C}$
T_{stg}	storage temperature		-40		125		$^{\circ}\text{C}$
V_{ISOL}	isolation voltage	$I_{ISOL} \leq 1 \text{ mA}$; 50/60 Hz			2500		V~
CTI	comparative tracking index				-		
F_C	mounting force		40		80		N
d_S	creep distance on surface		12.7				mm
d_A	strike distance through air		12				mm
Weight				35			g

Equivalent Circuits for Simulation




Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
V_0 R_0	rectifier diode	D8 - D13	$T_{VJ} = 125^{\circ}\text{C}$	0.9 16			V m Ω
V_0 R_0	IGBT	T1 - T6	$T_{VJ} = 125^{\circ}\text{C}$	1.0 67			V m Ω
V_0 R_0	free wheeling diode	D1 - D6	$T_{VJ} = 125^{\circ}\text{C}$	1.15 50			V m Ω
V_0 R_0	IGBT	T7	$T_{VJ} = 125^{\circ}\text{C}$	1.0 67			V m Ω
V_0 R_0	free wheeling diode	D7	$T_{VJ} = 125^{\circ}\text{C}$	1.6 53			V m Ω

IXYS reserves the right to change limits, test conditions and dimensions.

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated


20070802

Circuit Diagram

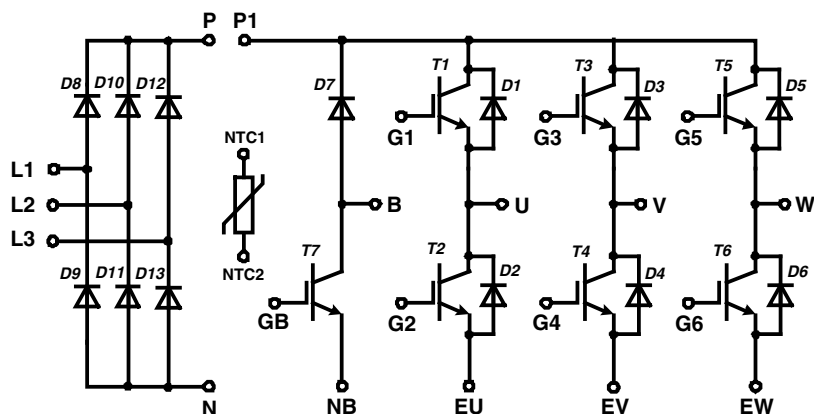


Outline Drawing

Dimensions in mm (1 mm = 0.0394")

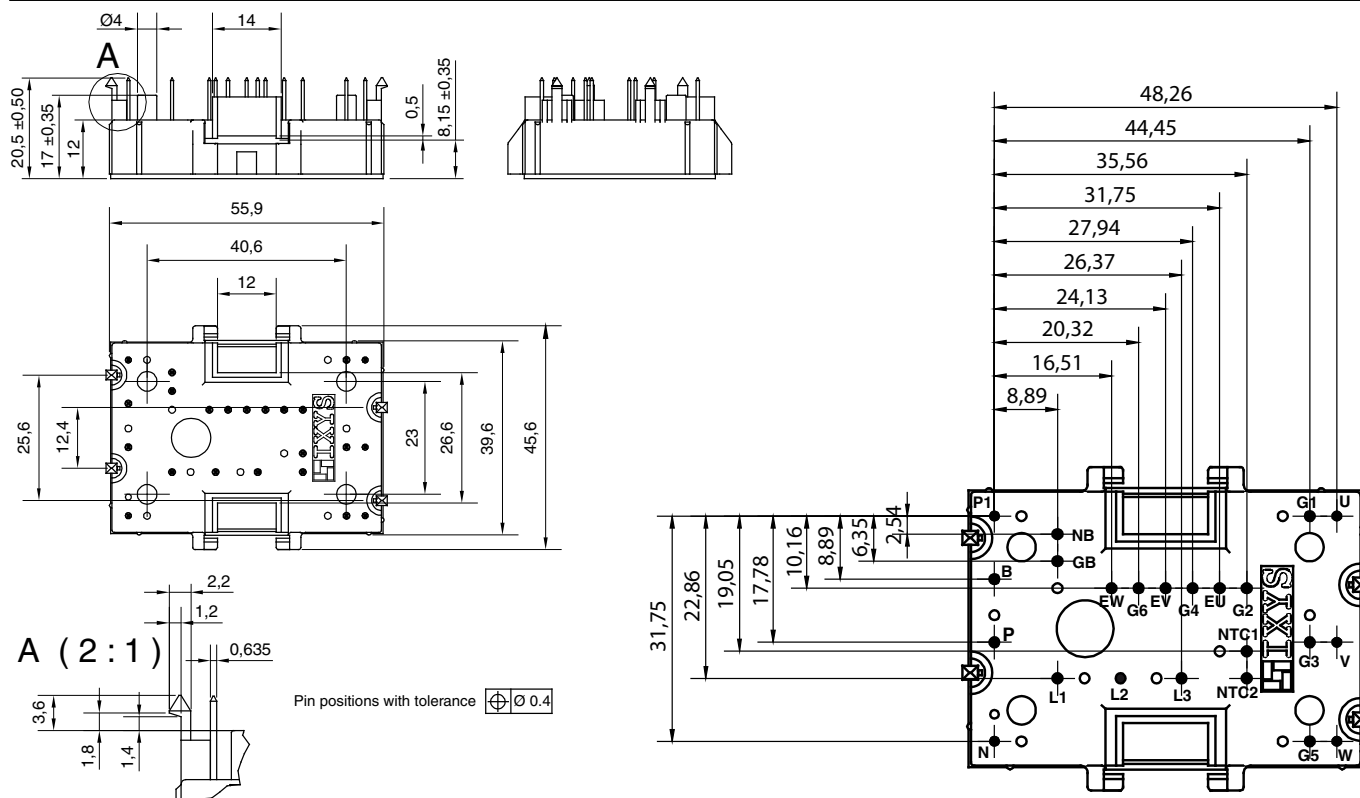


Product Marking




Part number

M = Module
I = IGBT
T = Standard trench
A = Gen 1 / std
10 = Current Rating [A]
WB = 6-Pack + 3~ Rectifier Bridge & Brake Unit
1200 = Reverse Voltage [V]
T = NTC
MH = MiniPack2


Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	MITB 15 WB 1200 TMH	MITB15WB1200TMH	Box	20	502893

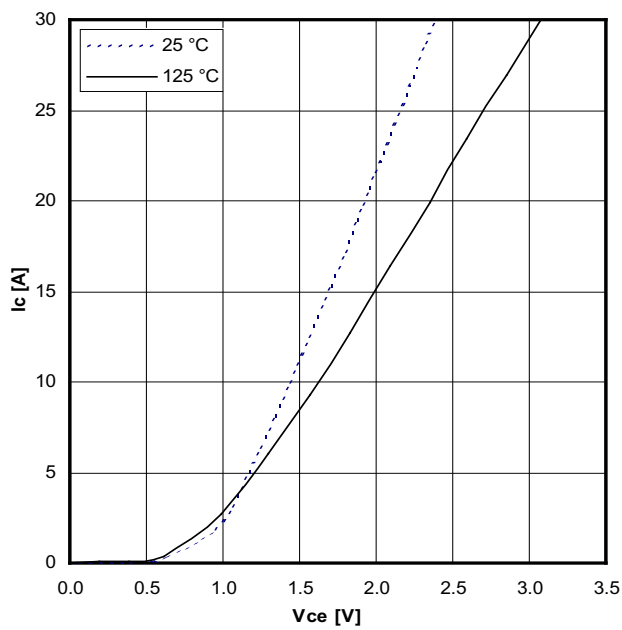


Typical output characteristics, $V_{GE} = 15\text{ V}$

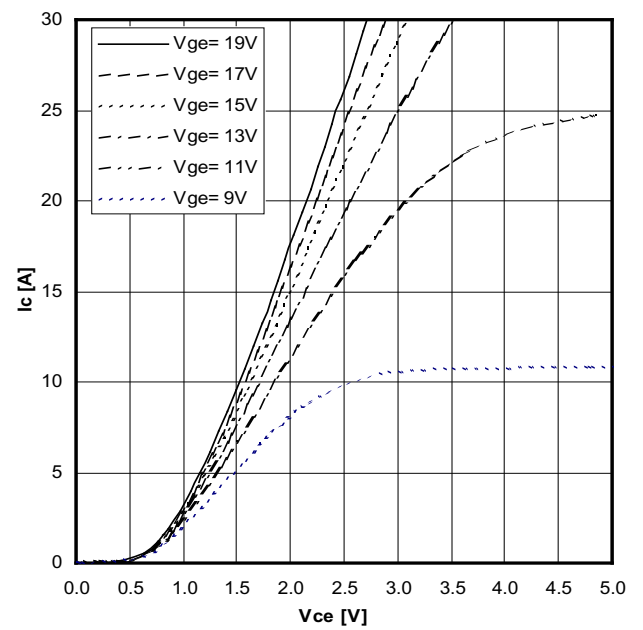


Typical output characteristics (125 °C)

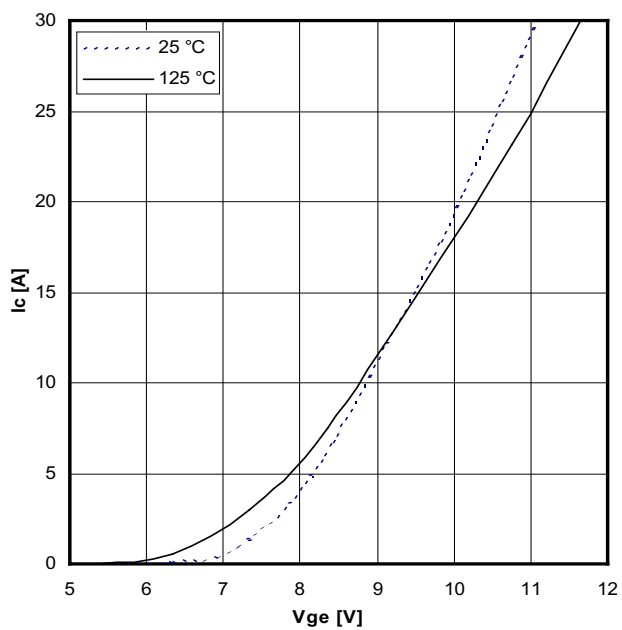


Typical transfer characteristics

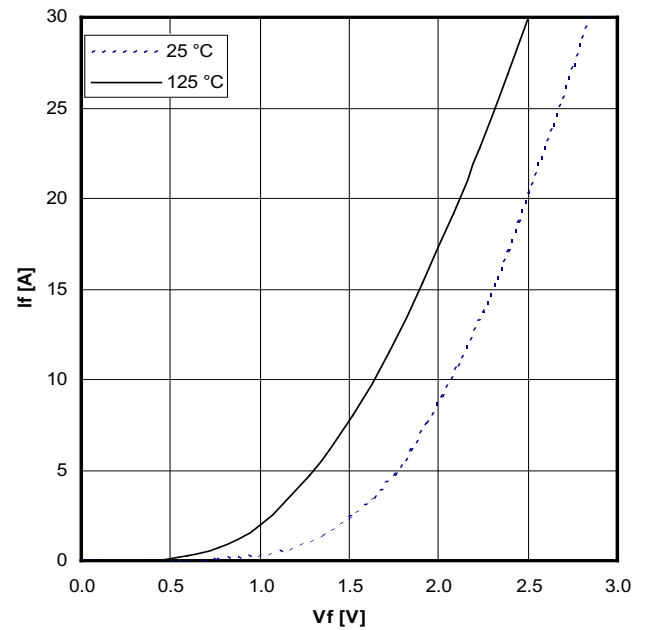


Typical forward characteristics of freewheeling diode

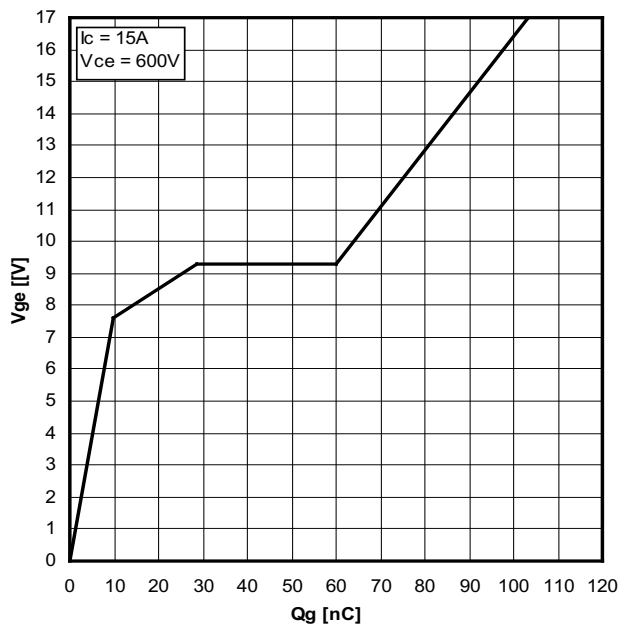


Typical turn on gate charge

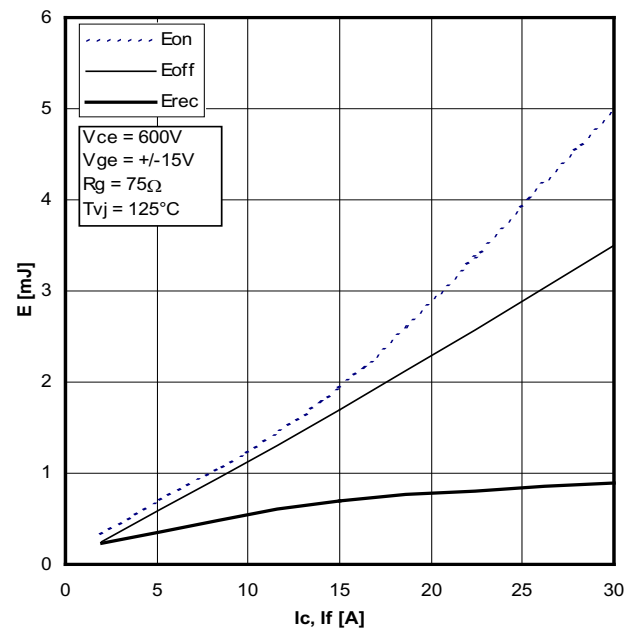


Typical switching energy versus collector current

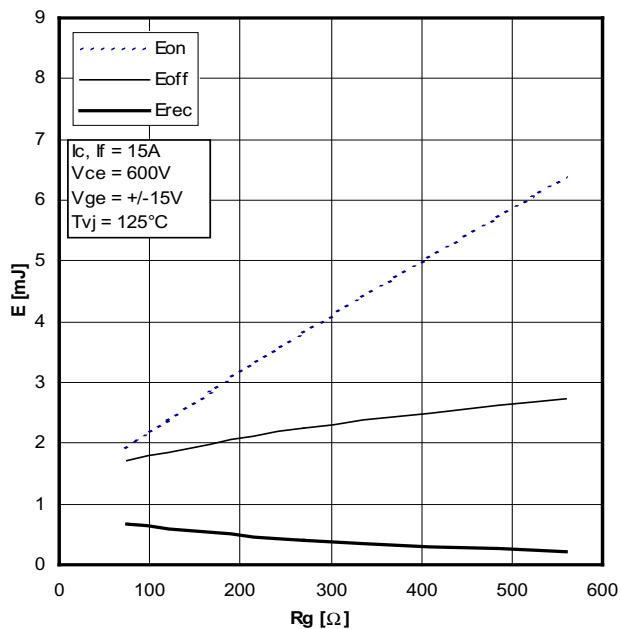


Typical switching energy versus gate resistance

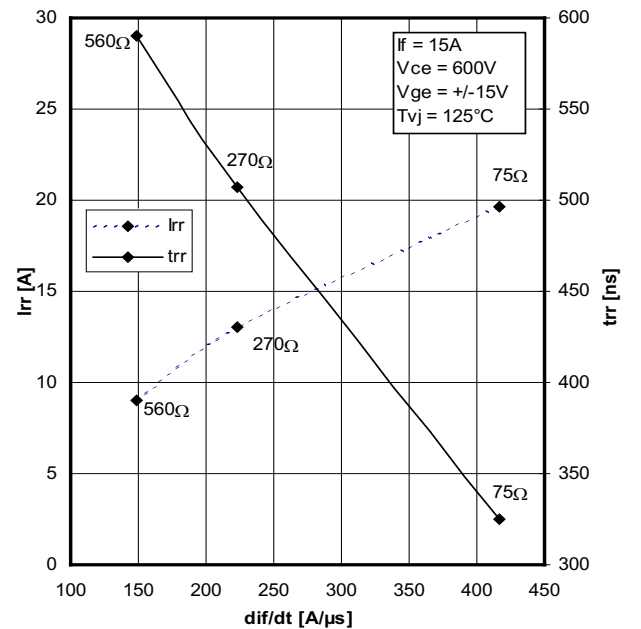


Typical turn-off characteristics of free wheeling diode

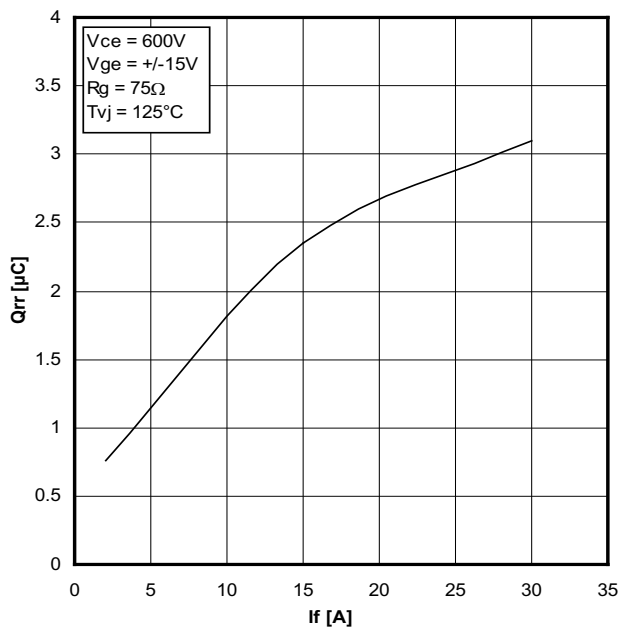


Typical turn-off characteristics of free wheeling diode

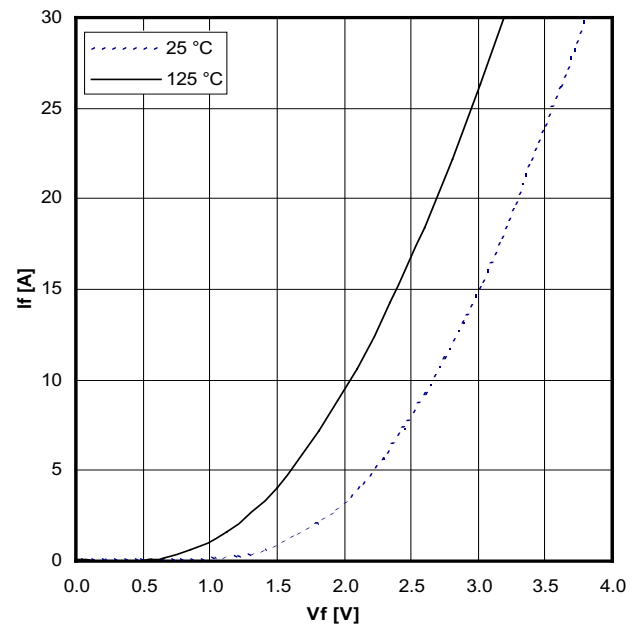

Typical forward characteristics of brake diode

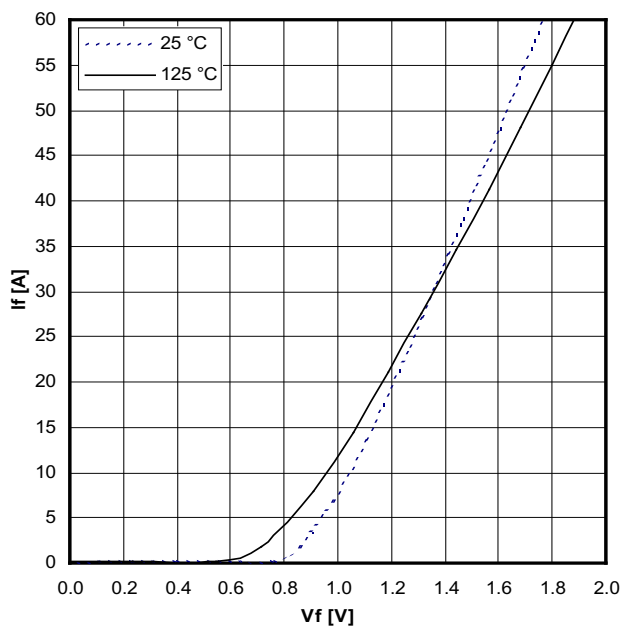

Typical forward characteristics per rectifier

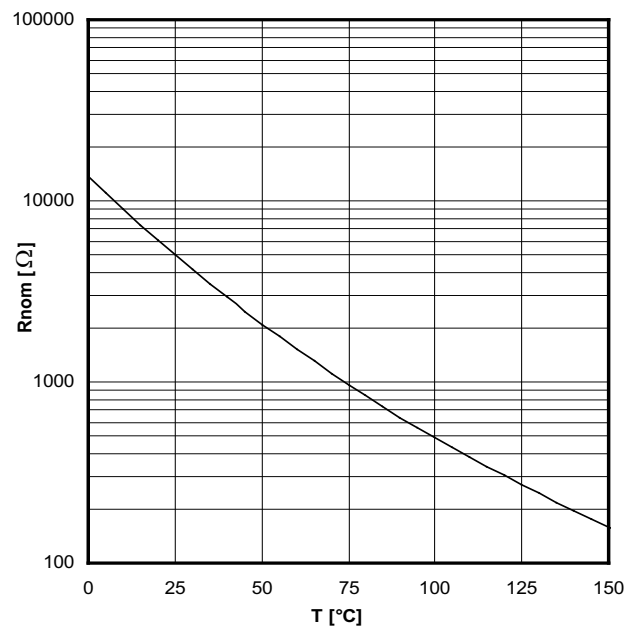

Typical thermistor resistance versus temperature

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[MITB15WB1200TMH](#)