



REV.	DESCRIPTION	DATE
A	NEW DRAWING	11/15/2005

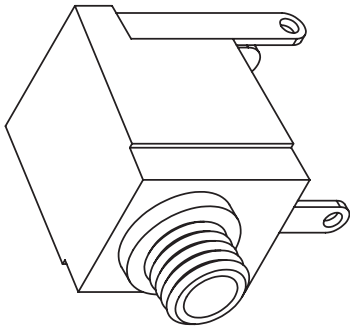

TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm

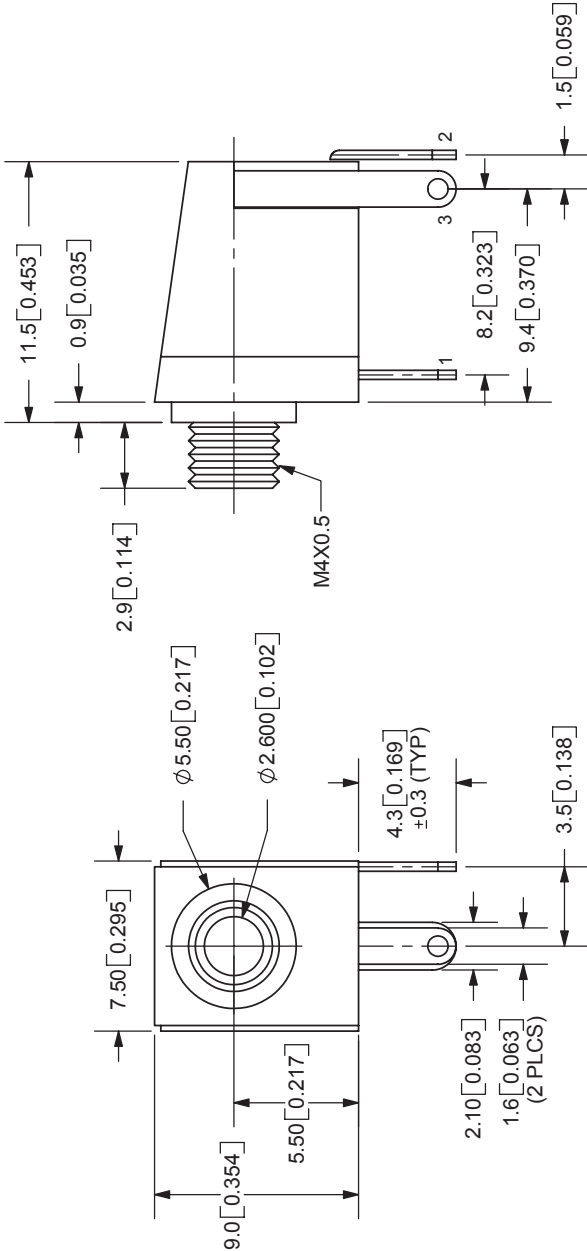

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

SPECIFICATIONS:
RATING: 12V DC @ 1A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN: 100V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -25° ~ +85°C

TITLE:	2.5mm AUDIO JACK-MONO	REV:	A
PART NO:	MJ-2508	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
SCALE:			3:1

BUSHING	TERMINAL 1	TERMINAL 2	TERMINAL 3	HOUSING
Brass	Brass	Copper Alloy	Brass	PBT
Nickel	Tin	Tin	Tin	

MODEL NO.	MJ-2508
D DIA.	THREADED M4X0.5
SCHEMATIC	