
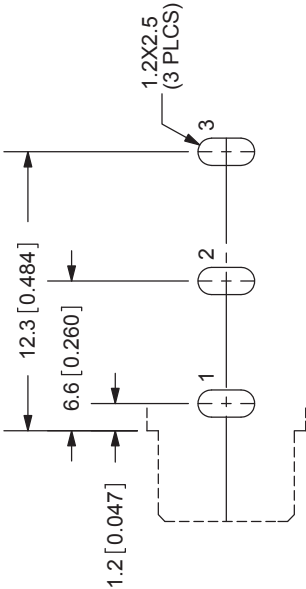


REV.	DESCRIPTION	DATE
A	NEW DRAWING	7/6/2007

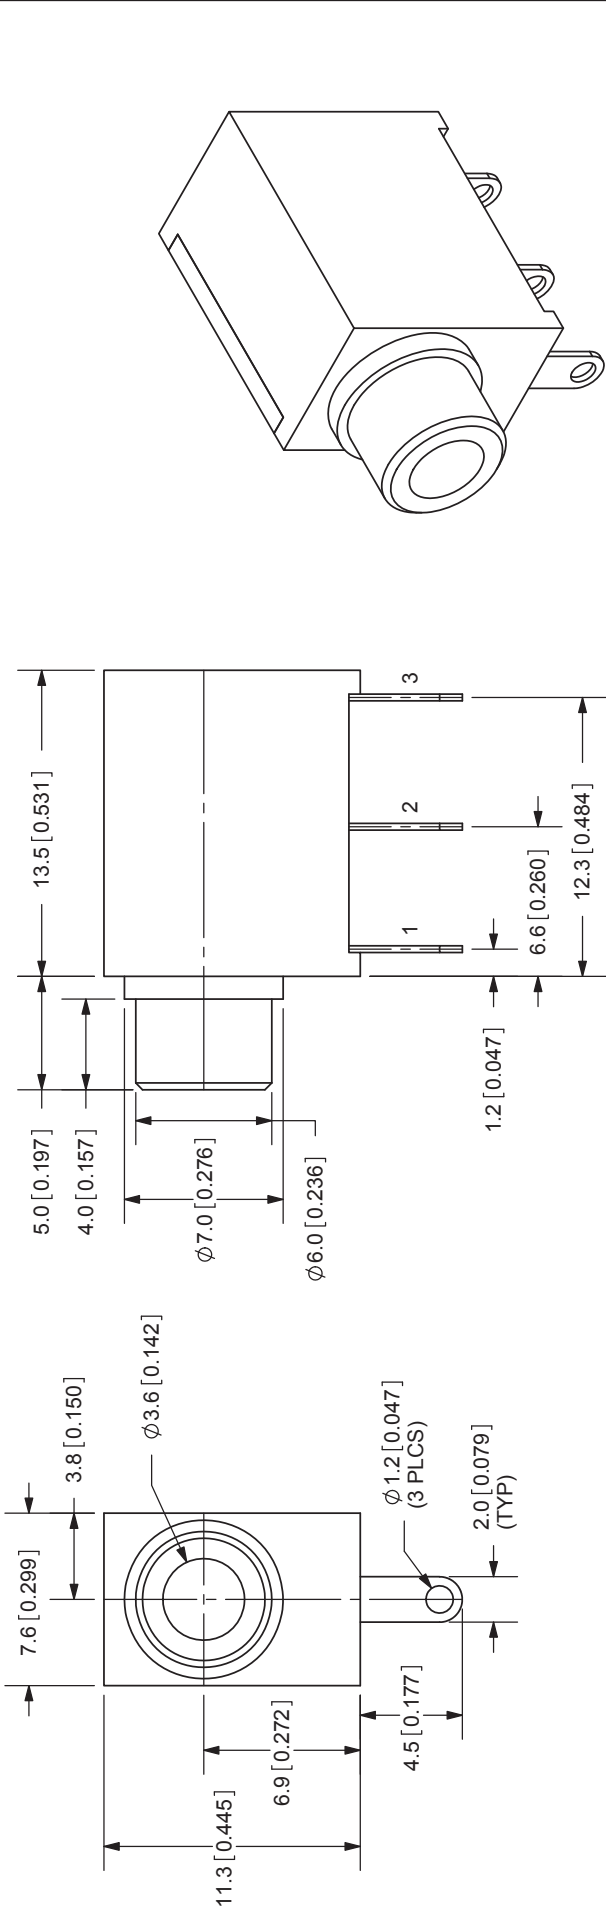

SPECIFICATIONS:
RATING: 12V DC @ 1A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -20° ~ +85°C

MODEL NO.	MJ-3502N
DIA.	NON-THREAD $\phi 6.0$
SCHEMATIC	

TERMINAL 1	MATERIAL	PLATING
TERMINAL 2	Brass	Silver
TERMINAL 3	Phosphor Bronze	Silver
BARREL	Brass	Silver
HOUSING	Brass	Nickel
COVER	POM	Black Color
	PC	Transparent



TOLERANCE:
±0.3mm UNLESS OTHERWISE
SPECIFIED



20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE:	3.5mm AUDIO JACK - MONO	REV:	A
PART NO.	MJ-3502N	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
SCALE:			3:1