

DATE	SYM	REVISION RECORD	DWN.	CK.
10/04	A	ECO No.438	JPM	


DESCRIPTION: SPST SURFACE MOUNT TACT SWITCH
WITH 4/6 NYLON MATERIALS, STAINLESS STEEL
CONTACT AND AVAILABLE WITH TAPE & REEL
PACKAGING (IF SPECIFIED)

SPECIFICATIONS:

RATING: 50 mA @ 12V DC
CONTACT RESISTANCE: 100 mohms MAX.
TRAVEL: .053 [0.25]±.021 [0.10]
LIFE: 1,000,000 CYCLES MIN.
OPERATING FORCE: 160±50gf



NOTES:

1. TO SPECIFY TAPE & REEL PACKAGING, ADD TR TO MODEL NO. EXAMPLE: MJTP1138ALTR
2. TAPE & REEL PACKAGING HOLDS 1250 PIECES PER REEL

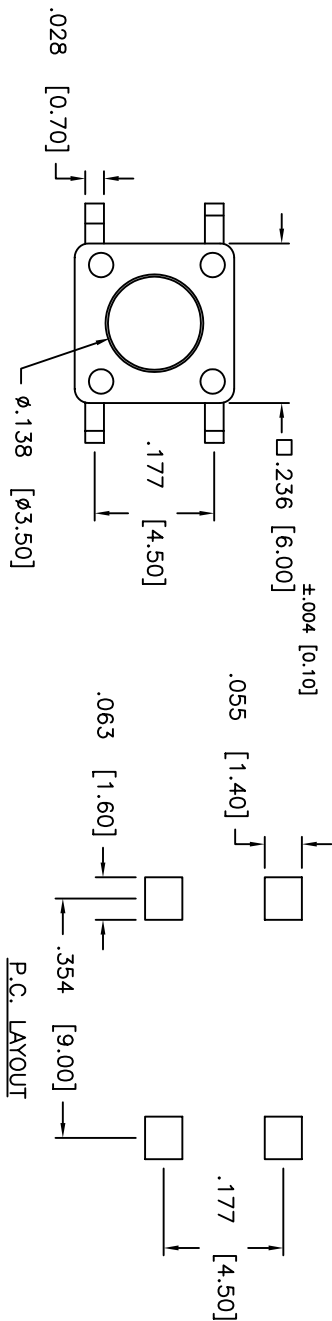

UNLESS OTHERWISE SPECIFIED
P.C. TOLERANCES ARE ±.002 [0.05]

P.C. LAYOUT

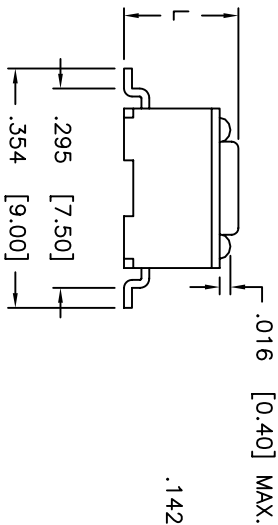

MODEL	L
MJTP1138L	.169 [4.30]
MJTP1138AL	.197 [5.00]
MJTP1138BL	.374 [9.50]
MJTP1138CL	.315 [8.00]
MJTP1138EL	.287 [7.30]
MJTP1138FL	.335 [8.50]
MJTP1138GL	.276 [7.00]

TOLERANCES (EXCEPT AS NOTED)			
DECIMAL	± .012	INCH	1 OF 2
FRACTIONAL	± [0.30]	SCALE	5:1
ANGULAR	± —	DRAWN	APPROVED
TITLE			
MJTP1138*L			
DATE	04/01/99	DRAWING NUMBER	B7392
REV	A		

THIS DOCUMENT CONTAINS INFORMATION WHICH IS THE EXCLUSIVE
PROPERTY OF APEM COMPONENTS, INC. DISTRIBUTION,
REPRODUCTION OR USE BY OTHERS IS NOT PERMITTED WITHOUT THE
EXPRESS WRITTEN CONSENT OF APEM COMPONENTS, INC.

APEM CONFIDENTIAL

Q.A. INSPECT.
DESIGNATES CRITICAL
DIMENSION



APEM

WAKEFIELD, MA.

