

Metallized Polypropylene (PP) Capacitors in PCM 7.5 mm to 37.5 mm. Capacitances from 1000 pF to 10 µF. Rated Voltages from 100 VDC to 2000 VDC.

Special Features

- High volume/capacitance ratio
- Self-healing
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2011/65/EU

Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- Oscillating circuits
- High frequency coupling and decoupling

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

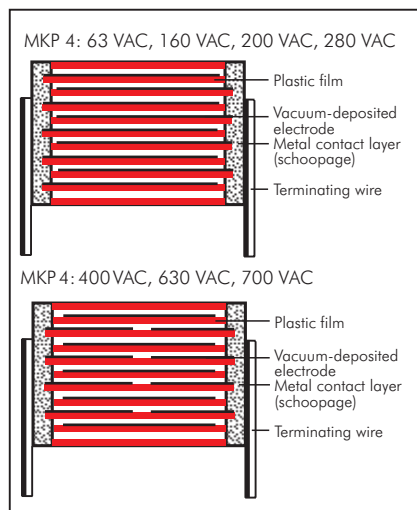

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Black.
Epoxy resin seal: Red

Electrical Data

Capacitance range:

1000 pF to 10 µF (E12-values on request)

Rated voltages:

100 VDC, 250 VDC, 400 VDC, 630 VDC,
850 VDC, 1000 VDC, 1600 VDC, 2000 VDC

Capacitance tolerances:

±20%, ±10%, ±5%

Operating temperature range:

–55° C to +100° C

Climatic test category:

55/100/56 in accordance with IEC

Insulation resistance at +20° C:

$C \leq 0.33 \mu\text{F}$: $\geq 1 \times 10^5 \text{ M}\Omega$

(mean value: $5 \times 10^5 \text{ M}\Omega$)

$C > 0.33 \mu\text{F}$: $\geq 30\,000 \text{ sec (M}\Omega \times \mu\text{F)}$

(mean value: 100\,000 sec)

Measuring voltage: 100 V/1 min.

Maximum pulse rise time:

Capacitance pF/µF	max. pulse rise time V/µsec at $T_A < 40^\circ \text{C}$							
	100 VDC	250 VDC	400 VDC	630 VDC	850 VDC	1000 VDC	1600 VDC	2000 VDC
1000 ... 2200	–	–	–	–	2200	2200	3500	5200
3300 ... 6800	–	–	–	–	1150	1150	2700	3500
0.01 ... 0.022	450	450	450	500	550	550	1800	2700
0.033 ... 0.068	250	250	300	350	400	400	900	1800
0.1 ... 0.22	150	150	200	250	300	300	500	900
0.33 ... 0.68	100	100	150	200	200	200	–	–
1.0 ... 2.2	75	100	100	150	150	150	–	–
3.3 ... 4.7	60	100	100	120	140	140	–	–
6.8 ... 10	40	50	60	85	–	–	–	–

for pulses equal to the rated voltage

Dissipation factors at +20° C:

$\tan \delta \leq 10 \times 10^{-4}$ at 1 kHz

Test specifications:

In accordance with IEC 60384-16

Test voltage: $1.6 U_r$, 2 sec.

Dielectric absorption: 0.05%

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from +85° C for DC voltages and from +75° C for AC voltages.

Reliability:

Operational life > 300\,000 hours

Failure rate < 2 fit ($0.5 \times U_r$ and 40°C).

Mechanical Tests

Pull test on pins:

$d \leq 0.8 \phi$: 10 N in direction of pins

$d > 0.8 \phi$: 20 N in direction of pins

according to IEC 60068-2-21

Vibration:

6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

Low air density:

1 kPa = 10 mbar in accordance with IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec²
in accordance with IEC 60068-2-29

Packing

Available taped and reeled up to and including case size 15 x 26 x 31.5 / PCM 27.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data


Capacitance	100 VDC/63 VAC*					250 VDC/160 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μ F	3	8.5	10	7.5	MKP4D021002B00_____	3	8.5	10	7.5	MKP4F021002B00_____
0.015 "	3	8.5	10	7.5	MKP4D021502B00_____	3	8.5	10	7.5	MKP4F021502B00_____
0.022 "	3	8.5	10	7.5	MKP4D022202B00_____	3	8.5	10	7.5	MKP4F022202B00_____
0.033 "	3	8.5	10	7.5	MKP4D023302B00_____	3	8.5	10	7.5	MKP4F023302B00_____
0.047 "	4	9	13	10	MKP4D023303C00_____	4	9	13	10	MKP4F023303C00_____
	4	9	10	7.5	MKP4D024702C00_____	4	9	10	7.5	MKP4F024702C00_____
	4	9	13	10	MKP4D024703C00_____	4	9	13	10	MKP4F024703C00_____
0.068 "	4	9	10	7.5	MKP4D026802C00_____	4	9	10	7.5	MKP4F026802C00_____
	4	9	13	10	MKP4D026803C00_____	4	9	13	10	MKP4F026803C00_____
0.1 μ F	4.5	9.5	10.3	7.5	MKP4D031002D00_____	4.5	9.5	10.3	7.5	MKP4F031002D00_____
	4	9	13	10	MKP4D031003C00_____	4	9	13	10	MKP4F031003C00_____
0.15 "	5	10.5	10.3	7.5	MKP4D031502E00_____	5	10.5	10.3	7.5	MKP4F031502E00_____
	5	11	13	10	MKP4D031503F00_____	5	11	13	10	MKP4F031503F00_____
0.22 "	6	12	13	10	MKP4D032203G00_____	6	12	13	10	MKP4F032203G00_____
	5	11	18	15	MKP4D032204B00_____	5	11	18	15	MKP4F032204B00_____
0.33 "	6	12.5	18	15	MKP4D033304C00_____	6	12.5	18	15	MKP4F033304C00_____
0.47 "	7	14	18	15	MKP4D034704D00_____	7	14	18	15	MKP4F034704D00_____
0.68 "	8	15	18	15	MKP4D036804F00_____	8	15	18	15	MKP4F036804F00_____
	6	15	26.5	22.5	MKP4D036805B00_____	6	15	26.5	22.5	MKP4F036805B00_____
1.0 μ F	7	16.5	26.5	22.5	MKP4D041005D00_____	7	16.5	26.5	22.5	MKP4F041005D00_____
1.5 "	10.5	19	26.5	22.5	MKP4D041505G00_____	10.5	19	26.5	22.5	MKP4F041505G00_____
2.2 "	11	21	26.5	22.5	MKP4D042205I00_____	11	21	26.5	22.5	MKP4F042205I00_____
	11	21	31.5	27.5	MKP4D042206B00_____	11	21	31.5	27.5	MKP4F042206B00_____
3.3 "	13	24	31.5	27.5	MKP4D043306D00_____	13	24	31.5	27.5	MKP4F043306D00_____
4.7 "	13	24	31.5	27.5	MKP4D044706D00_____	15	26	31.5	27.5	MKP4F044706F00_____
6.8 "	15	26	31.5	27.5	MKP4D046806F00_____	17	29	31.5	27.5	MKP4F046806G00_____
	13	24	41.5	37.5	MKP4D046807C00_____	15	26	41.5	37.5	MKP4F046807D00_____
10 μ F	17	29	41.5	37.5	MKP4D051007E00_____	19	32	41.5	37.5	MKP4F051007F00_____

* AC voltages: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

The high values and large box sizes according to main catalogue 2015 are still available on request.

Dims. in mm.

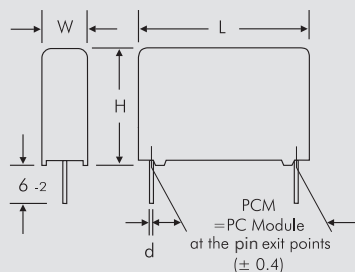

ϕd	PCM	W
0.5	7.5	= 3
0.6	7.5	≥ 4
0.6	10	
0.8	15 - 27.5	
1.0	37.5	

Part number completion:

Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: 6-2 = SD
Taped version see page 145.

Rights reserved to amend design data without prior notification.

Continuation page 61

Continuation


General Data

Capacitance	400 VDC/220 VAC*					630 VDC/280 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μF	3	8.5	10	7.5	MKP4G021002B00_____	3	8.5	10	7.5	MKP4J021002B00_____
0.015 "	4	9	10	7.5	MKP4G021502C00_____	4	9	13	10	MKP4J021003C00_____
	4	9	13	10	MKP4G021503C00_____	4	9	10	7.5	MKP4J021502C00_____
0.022 "	4.5	9.5	10.3	7.5	MKP4G022202D00_____	4.5	9.5	13	10	MKP4J021503C00_____
	4	9	13	10	MKP4G022203C00_____	4	9	13	7.5	MKP4J022202D00_____
0.033 "	5	10.5	10.3	7.5	MKP4G023302E00_____	5	10.5	10.3	7.5	MKP4J022203C00_____
	4	9	13	10	MKP4G023303C00_____	4	9	13	10	MKP4J022203C00_____
0.047 "	5	10.5	10.3	7.5	MKP4G024702E00_____	5.7	12.5	10.3	7.5	MKP4J023302E00_____
	5	11	13	10	MKP4G024703F00_____	5	11	13	10	MKP4J023303C00_____
0.068 "	5.7	12.5	10.3	7.5	MKP4G026802F00_____	6	12	13	10	MKP4J024702F00_____
	5	11	13	10	MKP4G026803F00_____	6	12.5	13	10	MKP4J024703F00_____
0.1 μF	6	12	13	10	MKP4G031003G00_____	7	14	18	15	MKP4J026803G00_____
	5	11	18	15	MKP4G031004B00_____	6	12.5	18	15	MKP4J026804C00_____
0.15 "	6	12.5	18	15	MKP4G031504C00_____	8	15	18	15	MKP4J031004D00_____
						6	15	26.5	22.5	MKP4J031504C00_____
0.22 "	7	14	18	15	MKP4G032204D00_____	9	16	18	15	MKP4J031505B00_____
						7	16.5	18	15	MKP4J032204J00_____
0.33 "	8	15	18	15	MKP4G033304F00_____	7	16.5	26.5	22.5	MKP4J032205D00_____
	6	15	26.5	22.5	MKP4G033305B00_____	8.5	18.5	26.5	22.5	MKP4J033305F00_____
0.47 "	7	16.5	26.5	22.5	MKP4G034705D00_____	10.5	19	26.5	22.5	MKP4J034705G00_____
						11	21	31.5	27.5	MKP4J034706B00_____
0.68 "	8.5	18.5	26.5	22.5	MKP4G036805F00_____	11	21	31.5	27.5	MKP4J036806B00_____
1.0 μF	11	21	26.5	22.5	MKP4G041005I00_____	13	24	31.5	27.5	MKP4J036806B00_____
	11	21	31.5	27.5	MKP4G041006B00_____					MKP4J041006D00_____
1.5 "	11	21	31.5	27.5	MKP4G041506B00_____	15	26	31.5	27.5	MKP4J041506F00_____
2.2 "	15	26	31.5	27.5	MKP4G042206F00_____	17	29	41.5	37.5	MKP4J042207E00_____
3.3 "	17	29	31.5	27.5	MKP4G043306G00_____	19	32	41.5	37.5	MKP4J042207E00_____
	17	29	41.5	37.5	MKP4G043307E00_____					MKP4J043307F00_____
4.7 "	19	32	41.5	37.5	MKP4G044707F00_____	20	39.5	41.5	37.5	MKP4J044707G00_____
6.8 "	20	39.5	41.5	37.5	MKP4G046807G00_____	24	45.5	41.5	37.5	MKP4J044707G00_____
10 μF	24	45.5	41.5	37.5	MKP4G046807G00_____					MKP4J046807H00_____
						35	50	41.5	37.5	MKP4J051007J00_____

* AC voltages: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

The high values and large box sizes according to main catalogue 2015 are still available on request.

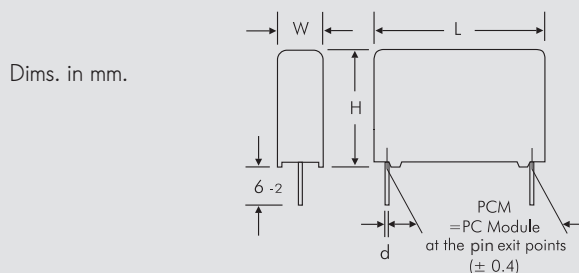

Rights reserved to amend design data without prior notification.

Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Pin length: 6-2 = SD

Taped version see page 145.

Continuation page 62

Continuation

General Data

Capacitance	850 VDC/400 VAC*					1000 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	13	10	MKP4M011003C00_____	4	9	13	10	MKP4O111003C00_____
1500 "	4	9	13	10	MKP4M011503C00_____	4	9	13	10	MKP4O111503C00_____
2200 "	4	9	13	10	MKP4M012203C00_____	4	9	13	10	MKP4O112203C00_____
3300 "	4	9	13	10	MKP4M013303C00_____	4	9	13	10	MKP4O113303C00_____
4700 "	4	9	13	10	MKP4M014703C00_____	4	9	13	10	MKP4O114703C00_____
6800 "	4	9	13	10	MKP4M016803C00_____	5	11	13	10	MKP4O116803F00_____
0.01 µF	5	11	13	10	MKP4M021003F00_____	5	11	13	10	MKP4O121003F00_____
0.015 "	5	11	13	10	MKP4M021503F00_____	5	11	13	10	MKP4O121503F00_____
	5	11	18	15	MKP4M021504B00_____	5	11	18	15	MKP4O121504B00_____
0.022 "	5	11	18	15	MKP4M022204B00_____	5	11	18	15	MKP4O122204B00_____
0.033 "	6	12.5	18	15	MKP4M023304C00_____	6	12.5	18	15	MKP4O123304C00_____
0.047 "	7	14	18	15	MKP4M024704D00_____	7	14	18	15	MKP4O124704D00_____
0.068 "	8	15	18	15	MKP4M026804F00_____	8	15	18	15	MKP4O126804F00_____
	6	15	26.5	22.5	MKP4M026805B00_____	6	15	26.5	22.5	MKP4O126805B00_____
0.1 µF	9	16	18	15	MKP4M031004J00_____	9	16	18	15	MKP4O131004J00_____
	7	16.5	26.5	22.5	MKP4M031005D00_____	7	16.5	26.5	22.5	MKP4O131005D00_____
0.15 "	8.5	18.5	26.5	22.5	MKP4M031505F00_____	8.5	18.5	26.5	22.5	MKP4O131505F00_____
0.22 "	11	21	26.5	22.5	MKP4M032205I00_____	11	21	26.5	22.5	MKP4O132205I00_____
	11	21	31.5	27.5	MKP4M032206B00_____	11	21	31.5	27.5	MKP4O132206B00_____
0.33 "	11	21	31.5	27.5	MKP4M033306B00_____	11	21	31.5	27.5	MKP4O133306B00_____
0.47 "	13	24	31.5	27.5	MKP4M034706D00_____	13	24	31.5	27.5	MKP4O134706D00_____
0.68 "	17	29	31.5	27.5	MKP4M036806G00_____	17	29	31.5	27.5	MKP4O136806G00_____
1.0 µF	17	29	41.5	37.5	MKP4M041007E00_____	17	29	41.5	37.5	MKP4O141007E00_____
1.5 "	20	39.5	41.5	37.5	MKP4M041507G00_____	20	39.5	41.5	37.5	MKP4O141507G00_____
2.2 "	24	45.5	41.5	37.5	MKP4M042207H00_____	24	45.5	41.5	37.5	MKP4O142207H00_____
3.3 "	31	46	41.5	37.5	MKP4M043307I00_____	31	46	41.5	37.5	MKP4O143307I00_____
4.7 "	35	50	41.5	37.5	MKP4M044707J00_____	35	50	41.5	37.5	MKP4O144707J00_____


* AC voltages: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

New values and range

** PCM = Printed circuit module = pin spacing

The high values and large box sizes according to main catalogue 2015 are still available on request.

Dims. in mm.

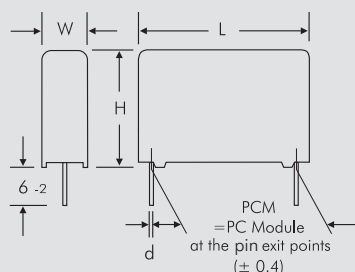

ø d	PCM	W
0.5	7.5	= 3
0.6	7.5	≥ 4
0.6	10	
0.8	15 - 27.5	
1.0	37.5	

Part number completion:

Tolerance: 20 % = M
10 % = K
5 % = J

Packing: bulk = S

Pin length: 6-2 = SD

Taped version see page 145.

Rights reserved to amend design data without prior notification.

Continuation page 63

Continuation

General Data


Capacitance	1600 VDC/630 VAC*					2000 VDC/700 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	13	10	MKP4T011003C00_____	4	9	13	10	MKP4U011003C00_____
1500 „	4	9	13	10	MKP4T011503C00_____	4	9	13	10	MKP4U011503C00_____
2200 „	4	9	13	10	MKP4T012203C00_____	4	9	13	10	MKP4U012203C00_____
3300 „	4	9	13	10	MKP4T013303C00_____	4	9	13	10	MKP4U013303C00_____
4700 „	4	9	13	10	MKP4T014703C00_____	4	9	13	10	MKP4U014703C00_____
6800 „	5	11	13	10	MKP4T016803F00_____	5	11	13	10	MKP4U016803F00_____
						5	11	18	15	MKP4U016804B00_____
0.01 µF	5	11	13	10	MKP4T021003F00_____	6	12.5	18	15	MKP4U021004C00_____
0.015 „	5	11	18	15	MKP4T021504B00_____	7	14	18	15	MKP4U021504D00_____
0.022 „	6	12.5	18	15	MKP4T022204C00_____	8	15	18	15	MKP4U022204F00_____
0.033 „	7	14	18	15	MKP4T023304D00_____	9	16	18	15	MKP4U023304J00_____
	6	15	26.5	22.5	MKP4T023305B00_____	6	15	26.5	22.5	MKP4U023305B00_____
0.047 „	9	16	18	15	MKP4T024704J00_____	7	16.5	26.5	22.5	MKP4U024705D00_____
	6	15	26.5	22.5	MKP4T024705B00_____					
0.068 „	7	16.5	26.5	22.5	MKP4T026805D00_____	8.5	18.5	26.5	22.5	MKP4U026805F00_____
0.1 µF	8.5	18.5	26.5	22.5	MKP4T031005F00_____	11	21	26.5	22.5	MKP4U031005I00_____

* AC voltages: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

■ New ranges

** PCM = Printed circuit module = pin spacing

Dims in mm



Ø d	PCM	W
0.5	7.5	= 3
0.6	7.5	≥ 4
0.6	10	
0.8	15 - 27.5	
1.0	37.5	

Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J






Packing: bulk = S

Pin length: 6-2 = SD

Taped version see page 145.

Rights reserved to amend design data without prior notification.

Permissible AC voltage
in relation to frequency
at 10° C internal temperature rise
(general guidel).

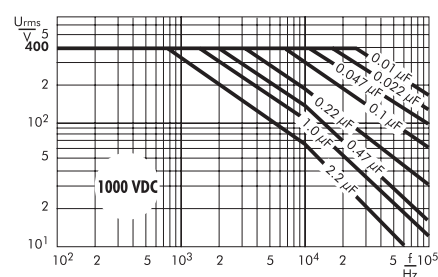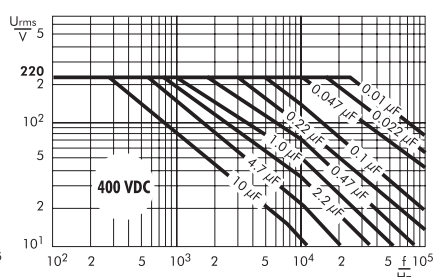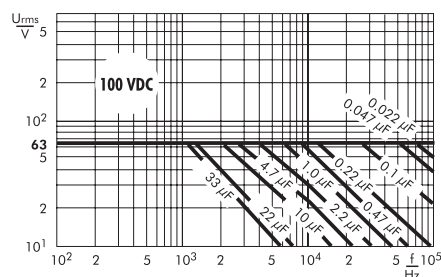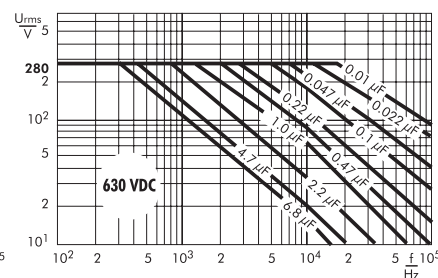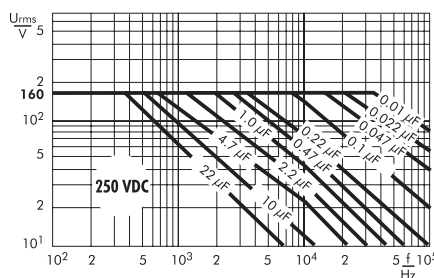

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$


Dwell time: $t < 5\text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\Sigma t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

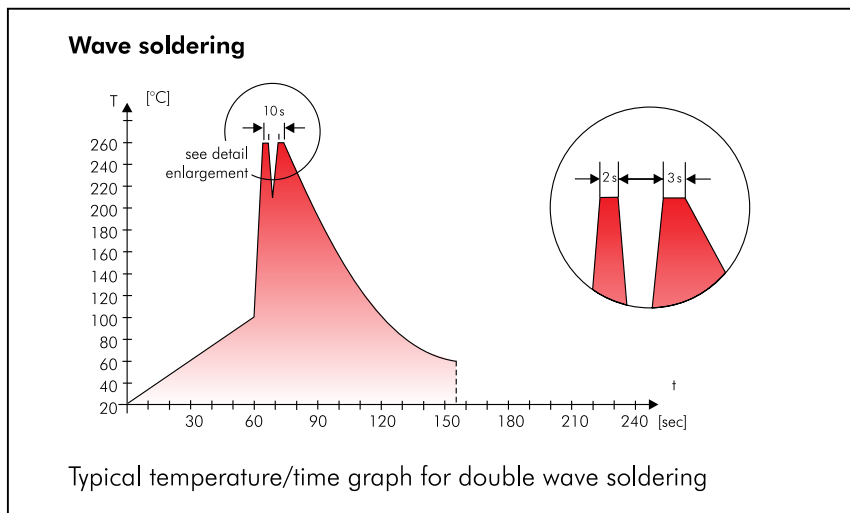

WIMA Quality and Environmental Philosophy

ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the infaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- | | |
|------------------------|------------|
| – Lead | – PBB/PBDE |
| – PCB | – Arsenic |
| – CFC | – Cadmium |
| – Hydrocarbon chloride | – Mercury |
| – Chromium 6+ | – etc. |

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei
konform RoHS 2011/65/EU

WIMA capacitors are lead free
in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

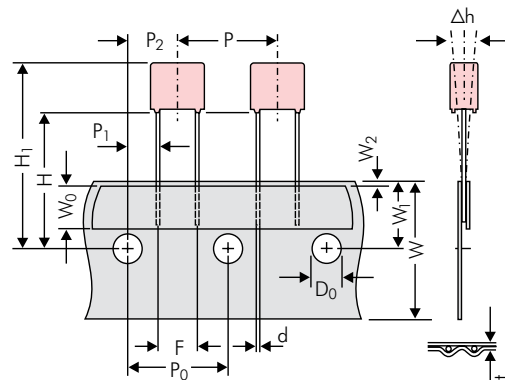


Diagram 1:
PCM 2.5/5/7.5mm

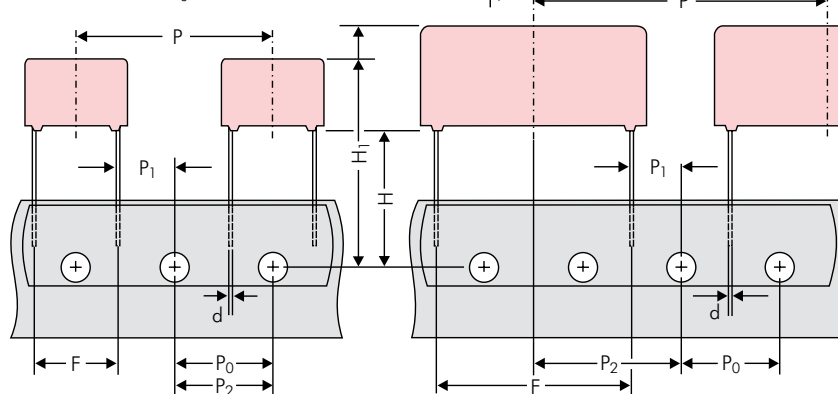


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2
Package (see also page 146)		ROLL/AMMO			AMMO			
		REEL ø 360 max. ø 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions		REEL ø 360 max. ø 30 ±1	B 52 ±2 58 ±2 or 66 ±2	REEL ø 500 max. ø 25 ±1	B 54 ±2 60 ±2 or 68 ±2 } depending on PCM and component dimensions
Unit		see details page 147.						

Dims in mm.

* Diameter of pins see General Data.


Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.


Position of components according to PCM 7.5 (sketch 1). P₀ = 12.7 or 15.0 is possible

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

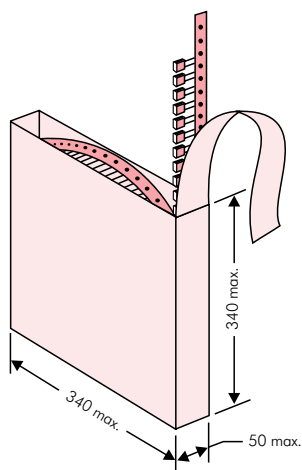

■ AMMO Packaging

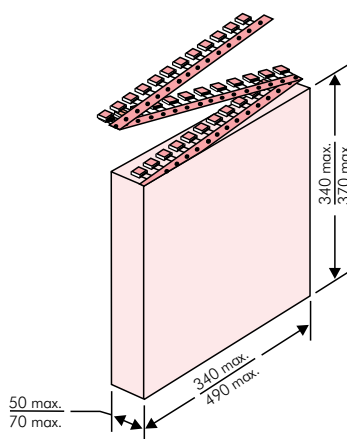

■ REEL Packaging

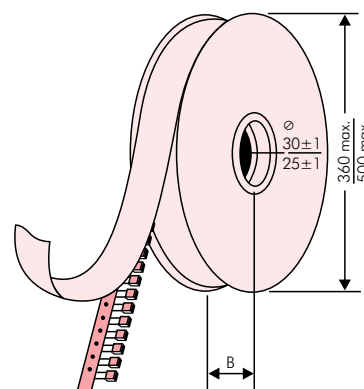

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made In Germany		Werk Unna	
Supplier-ID: 123456789	RoHS 2011/65/EU	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
		Gross Weight [g]: 1870	
WIMA Confirmation No.: 0001004053000100		WIMA Part No.: MKS2C034701C00K88D	
Handling Unit:	MKS 2	QTY: 5.000	COO: DE
	MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RM5		
	Standard 10% Loss - Standard	Drühte 6-2	Week 03/2011
1000067326	Vorlage Debitor Inland		

BARCODE „Code 39“

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	ROLL		REEL				AMMO			
						H16.5	H18.5	ø 360		ø 500		340 x 340		490 x 370	
	W	H	L	Codes				H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
					S	N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000		2200	2500		–		2800		–	
	3	7.5	4.6	0C	5000		2000	2300		–		2300		–	
	3.8	8.5	4.6	0D	5000		1500	1800		–		1800		–	
	4.6	9	4.6	0E	5000		1200	1500		–		1500		–	
	5.5	10	4.6	0F	5000		900	1200		–		1200		–	
5 mm	2.5	6.5	7.2	1A	5000		2200	2500		–		2800		–	
	3	7.5	7.2	1B	5000		2000	2300		–		2300		–	
	3.5	8.5	7.2	1C	5000		1600	2000		–		2000		–	
	4.5	6	7.2	1D	6000		1300	1500		–		1500		–	
	4.5	9.5	7.2	1E	4000		1300	1500		–		1500		–	
	5	10	7.2	1F	3500		1100	1400		–		1400		–	
	5.5	7	7.2	1G	4000		1000	1200		–		1200		–	
	5.5	11.5	7.2	1H	2500		1000	1200		–		1200		–	
	6.5	8	7.2	1I	2500		800	1000		–		1000		–	
	7.2	8.5	7.2	1J	2500		700	1000		–		1000		–	
	7.2	13	7.2	1K	2000		700	950		–		1000		–	
	8.5	10	7.2	1L	2000		600	800		–		800		–	
	8.5	14	7.2	1M	1500		600	800		–		800		–	
	11	16	7.2	1N	1000		500	600		–		400		–	
7.5 mm	2.5	7	10	2A	5000		–	2500		4400		2500		–	
	3	8.5	10	2B	5000		–	2200		4300		2300		4150	
	4	9	10	2C	4000		–	1700		3200		1700		3100	
	4.5	9.5	10.3	2D	3500		–	1500		2900		1400		2700	
	5	10.5	10.3	2E	3000		–	1300		2500		1300		–	
	5.7	12.5	10.3	2F	2000		–	1000		2200		1100		–	
	7.2	12.5	10.3	2G	1500		–	900		1800		1000		–	
10 mm	3	9	13	3A	3000		–	1100		2200		–		1900	
	4	8.5	13.5	FA	3000		–	900		1600		–		1450	
	4	9	13	3C	3000		–	900		1600		–		1450	
	4	9.5	13	3D	3000		–	900		1600		–		1400	
	5	10	13.5	FB	2000		–	700		1300		–		1200	
	5	11	13	3F	3000		–	700		1300		–		1200	
	6	12	13	3G	2400		–	550		1100		–		1000	
	6	12.5	13	3H	2400		–	550		1100		–		1000	
15 mm	8	12	13	3I	2000		–	400		800		–		740	
	5	11	18	4B	2400		–	600		1200		–		1150	
	5	13	19	FC	1000		–	600		1200		–		1200	
	6	12.5	18	4C	2000		–	500		1000		–		1000	
	6	14	19	FD	1000		–	500		1000		–		1000	
	7	14	18	4D	1600		–	450		900		–		850	
	7	15	19	FE	1000		–	450		900		–		850	
	8	15	18	4F	1200		–	400		800		–		740	
	8	17	19	FF	500		–	400		800		–		740	
	9	14	18	4H	1200		–	350		700		–		650	
	9	16	18	4J	900		–	350		700		–		650	
22.5 mm	10	18	19	FG	500		–	300		650		–		590	
	11	14	18	4M	1000		–	300		600		–		540	
	5	14	26.5	5A	1200		–	–		800		–		770	
	6	15	26.5	5B	1000		–	–		700		–		640	
	7	16.5	26.5	5D	760		–	–		600		–		550	
	8	20	28	FH	500		–	–		500		–		480	
	8.5	18.5	26.5	5F	500		–	–		480		–		450	
	10	22	28	FI	570*		–	–		420		–		380	
	10.5	19	26.5	5G	594*		–	–		400		–		360	
	10.5	20.5	26.5	5H	594*		–	–		400		–		360	
	11	21	26.5	5I	561*		–	–		380		–		350	
	12	24	28	FJ	480*		–	–		350		–		310	

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes		H16.5	H18.5	ø 360	ø 500	340 x 340	490 x 370				
					S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	567*	–	–	–	–	460/340*	–	–	–	420	–
	11	21	31.5	6B	459*	–	–	–	–	380/280*	–	–	–	350	–
	13	24	31.5	6D	378*	–	–	–	–	300	–	–	–	290	–
	13	25	33	FK	405*	–	–	–	–	–	–	–	–	–	–
	15	26	31.5	6F	324*	–	–	–	–	270	–	–	–	250	–
	15	26	33	FL	324*	–	–	–	–	–	–	–	–	–	–
	17	29	31.5	6G	198*	–	–	–	–	–	–	–	–	–	–
	17	34.5	31.5	6I	198*	–	–	–	–	–	–	–	–	–	–
	20	32	33	FM	162*	–	–	–	–	–	–	–	–	–	–
	20	39.5	31.5	6J	162*	–	–	–	–	–	–	–	–	–	–
37.5 mm	9	19	41.5	7A	441*	–	–	–	–	–	–	–	–	–	–
	11	22	41.5	7B	357*	–	–	–	–	–	–	–	–	–	–
	13	24	41.5	7C	294*	–	–	–	–	–	–	–	–	–	–
	15	26	41.5	7D	252*	–	–	–	–	–	–	–	–	–	–
	17	29	41.5	7E	154*	–	–	–	–	–	–	–	–	–	–
	19	32	41.5	7F	140*	–	–	–	–	–	–	–	–	–	–
	20	39.5	41.5	7G	126*	–	–	–	–	–	–	–	–	–	–
	24	45.5	41.5	7H	112*	–	–	–	–	–	–	–	–	–	–
	31	46	41.5	7I	84*	–	–	–	–	–	–	–	–	–	–
	35	50	41.5	7J	35*	–	–	–	–	–	–	–	–	–	–
	40	55	41.5	7K	28*	–	–	–	–	–	–	–	–	–	–
48.5 mm	19	31	56	8D	120*	–	–	–	–	–	–	–	–	–	–
	23	34	56	8E	80*	–	–	–	–	–	–	–	–	–	–
	27	37.5	56	8H	84*	–	–	–	–	–	–	–	–	–	–
	33	48	56	8J	25*	–	–	–	–	–	–	–	–	–	–
	37	54	56	8L	25*	–	–	–	–	–	–	–	–	–	–
52.5 mm	25	45	57	9D	70*	–	–	–	–	–	–	–	–	–	–
	30	45	57	9E	60*	–	–	–	–	–	–	–	–	–	–
	35	50	57	9F	25*	–	–	–	–	–	–	–	–	–	–
	45	55	57	9H	20*	–	–	–	–	–	–	–	–	–	–
	45	65	57	9J	20*	–	–	–	–	–	–	–	–	–	–

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D		
MKS 2				63 VDC		0.01 µF				2.5x6.5x7.2		-		20%	bulk	6 -2			
Type description: SMD-PET = SMDT SMD-PEN = SMDN SMD-PPS = SMDI FKP 02 = FKPO MKS 02 = MKSO FKS 2 = FKS2 FKP 2 = FKP2 FKS 3 = FKS3 FKP 3 = FKP 3 MKS 2 = MKS2 MKP 2 = MKP2 MKS 4 = MKS4 MKP 4C = MKPC MKP 4 = MKP4 MKP 10 = MKP1 FKP 1 = FKP1 MKP-X2 = MKX2 MKP-X1 R = MKX1 MKP-Y2 = MKY2 MP 3-X2 = MPX2 MP 3-X1 = MPX1 MP 3-Y2 = MPY2 MP 3R-Y2 = MPRY MKP 4F = MKPF Snubber MKP = SNMP Snubber FKP = SNFP GTO MKP = GTOM DC-LINK MKP 3 = DCP3 DC-LINK MKP 4 = DCP4 DC-LINK MKP 4S = DCP5 DC-LINK MKP 5 = DCP5 DC-LINK MKP 6 = DCP6 DC-LINK HC = DCHC DC-LINK HY = DCHY				Rated voltage: 50 VDC = B0 63 VDC = C0 100 VDC = D0 250 VDC = F0 400 VDC = G0 450 VDC = H0 520 VDC = H2 600 VDC = I0 630 VDC = J0 700 VDC = K0 800 VDC = L0 850 VDC = M0 900 VDC = N0 1000 VDC = O1 1100 VDC = P0 1200 VDC = Q0 1250 VDC = R0 1500 VDC = S0 1600 VDC = T0 2000 VDC = U0 2500 VDC = V0 3000 VDC = W0 4000 VDC = X0 6000 VDC = Y0 250 VAC = OV 275 VAC = 1W 300 VAC = 2W 305 VAC = AV 350 VAC = BV 440 VAC = 4W 500 VAC = 5W ...				Capacitance: 22 pF = 0022 47 pF = 0047 100 pF = 0100 150 pF = 0150 220 pF = 0220 330 pF = 0330 470 pF = 0470 680 pF = 0680 1000 pF = 1100 1500 pF = 1150 2200 pF = 1220 3300 pF = 1330 4700 pF = 1470 6800 pF = 1680 0.01 µF = 2100 0.022 µF = 2220 0.047 µF = 2470 0.1 µF = 3100 0.22 µF = 3220 0.47 µF = 3470 1 µF = 4100 2.2 µF = 4220 4.7 µF = 4470 10 µF = 5100 22 µF = 5220 47 µF = 5470 100 µF = 6100 220 µF = 6220 1000 µF = 7100 1500 µF = 7150 ...				Size: 4.8x3.3x3 Size 1812 = KA 4.8x3.3x4 Size 1812 = KB 5.7x5.1x3.5 Size 2220 = QA 5.7x5.1x4.5 Size 2220 = QB 7.2x6.1x3 Size 2824 = TA 7.2x6.1x5 Size 2824 = TB 10.2x7.6x5 Size 4030 = VA 12.7x10.2x6 Size 5040 = XA 15.3x13.7x7 Size 6054 = YA 2.5x7x4.6 PCM 2.5 = 0B 3x7.5x4.6 PCM 2.5 = 0C 2.5x6.5x7.2 PCM 5 = 1A 3x7.5x7.2 PCM 5 = 1B 2.5x7x10 PCM 7.5 = 2A 3x8.5x10 PCM 7.5 = 2B 3x9x13 PCM 10 = 3A 4x9x13 PCM 10 = 3C 5x11x18 PCM 15 = 4B 6x12.5x18 PCM 15 = 4C 5x14x26.5 PCM 22.5 = 5A 6x15x26.5 PCM 22.5 = 5B 9x19x31.5 PCM 27.5 = 6A 11x21x31.5 PCM 27.5 = 6B 9x19x41.5 PCM 37.5 = 7A 11x22x41.5 PCM 37.5 = 7B 19x31x56 PCM 48.5 = 8D 25x45x57 PCM 52.5 = 9D ...				Tolerance: ±20% = M ±10% = K ±5% = J ±2.5% = H ±1% = E ... Packing: AMMO H16.5 340x340 = A AMMO H16.5 490x370 = B AMMO H18.5 340x340 = C AMMO H18.5 490x370 = D REEL H16.5 360 = F REEL H16.5 500 = H REEL H18.5 360 = I REEL H18.5 500 = J ROLL H16.5 = N ROLL H18.5 = O BLISTER W12 180 = P BLISTER W12 330 = Q BLISTER W16 330 = R BLISTER W24 330 = T Bulk/TPS Standard = S ... Pin length (untaped) 3.5 ±0.5 = C9 6 -2 = SD 16 ±1 = P1 ... Pin length (taped) none = 00			
Version code: Standard = 00 Version A1 = 1A Version A1.1.1 = 1B Version A2 = 2A ...																			

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

WIMA:

[MKP4-1/250/10P22](#) [MKP4-1.0/250/10](#) [MKP4-.68/250/10](#) [MKP4J031004D00MSSD](#) [MKP4F034704D00KSSD](#)
[MKP4G044707F00KYSD](#) [MKP4G024703C00JSSD](#) [MKP4G041005I00KSSD](#) [MKP4G042206F00KYSD](#)
[MKP4F032203G00JSSD](#) [MKP4F033304C00JSSD](#) [MKP4F034704D00JSSD](#) [MKP4F026803C00JSSD](#)
[MKP4J022202D00JSSD](#) [MKP4J041506F00JYSD](#) [MKP4J031004D00KSSD](#) [MKP4F051007F00KYSD](#)
[MKP4J041006D00KYSD](#) [MKP4F024702C00KSSD](#) [MKP4F031003C00JSSD](#) [MKP4F022202B00JSSD](#)
[MKP4F031002D00KSSD](#) [MKP4F044706F00KYSD](#) [MKP4J031004D00JSSD](#) [MKP4O136806G00KYSD](#)
[MKP4G041506B00KYSD](#) [MKP4F041005D00JSSD](#) [MKP4G023302D00KSSD](#) [MKP4G024702E00KSSD](#)
[MKP4G026802F00KSSD](#) [MKP4G022202C00KSSD](#) [MKP4J021502C00KSSD](#) [MKP4F032203G00KSSD](#)
[MKP4J021002B00KSSD](#) [MKP4F031502E00KSSD](#) [MKP4F033304C00KSSD](#) [MKP4F036805B00KSSD](#)
[MKP4F032204B00KSSD](#) [MKP4G024703C00KSSD](#) [MKP4J021003C00KSSD](#) [MKP4F031003C00KSSD](#)
[MKP4F031503F00KSSD](#) [MKP4J021503C00KSSD](#) [MKP4G022203C00KSSD](#) [MKP4G023303C00KSSD](#)
[MKP4G026803F00KSSD](#) [MKP4O124704D00KSSD](#) [MKP4O142207H00KYSD](#) [MKP4F026803C00KF00](#) [MKP4-](#)
[.33/630/10P22](#) [MKP4-.033/630/10P10](#) [MKP4O141507G00JSSD](#) [MKP4G041506B00KSSD](#) [MKP4-.47/630/5P22](#)
[MKP4O122204B00KSSD](#) [MKP4-.22/400/10P15](#) [MKP4J041006D00KSSD](#) [MKP4G042206F00KSSD](#)
[MKP4J034705G00KYSD](#) [MKP4G044707F00MSSD](#) [MKP4G033304F00JD00](#) [MKP4F046807D00JYSD](#)
[MKP4F046807D00JSSD](#) [MKP4F031502E00JSSD](#) [MKP4-4.7/630/10P37](#) [MKP4.01/630/10P7L3.5](#) [MKP4-.1/250/10P10](#)
[MKP4-.1/250/10P7](#) [MKP4G032204D00KSSD](#) [MKP4O141007E00KSSD](#) [MKP4F036805B00JSSD](#)
[MKP4F041505G00JSSD](#) [MKP4O132206B00JSSD](#) [MKP4-4.7/400/20P37](#) [MKP4-.047/400/10P10](#) [MKP4-22/100/10P37](#)
[MKP4-.22/1KV/5P27](#) [MKP4O141007E00KYSD](#) [MKP4-.01/630/10P7T](#) [MKP4-.1/1KV/10P15](#) [MKP4-1.5/630/10P27](#)
[MKP4-.1/630/5P15](#) [MKP4-.68/630/5P27](#) [MKP4F024703C00KSSD](#) [MKP4-.15/400/10P15](#) [MKP4-.047/400/5P10](#)
[MKP4-2.2/400/10P27](#) [MKP4G036805F00JSSD](#) [MKP4F042205I00JYSD](#) [MKP4G041506B00JSSD](#)
[MKP4F042206B00JSSD](#) [MKP4F051007F00KSSD](#) [MKP4O136806G00KSSD](#) [MKP4J034705G00JYSD](#)
[MKP4F031002D00JSSD](#) [MKP4F043306D00JSSD](#) [MKP4J042207E00KSSD](#) [MKP4G032204D00KD00](#)
[MKP4G036805F00KD00](#) [MKP4-2.2/1KV/10P37](#)