
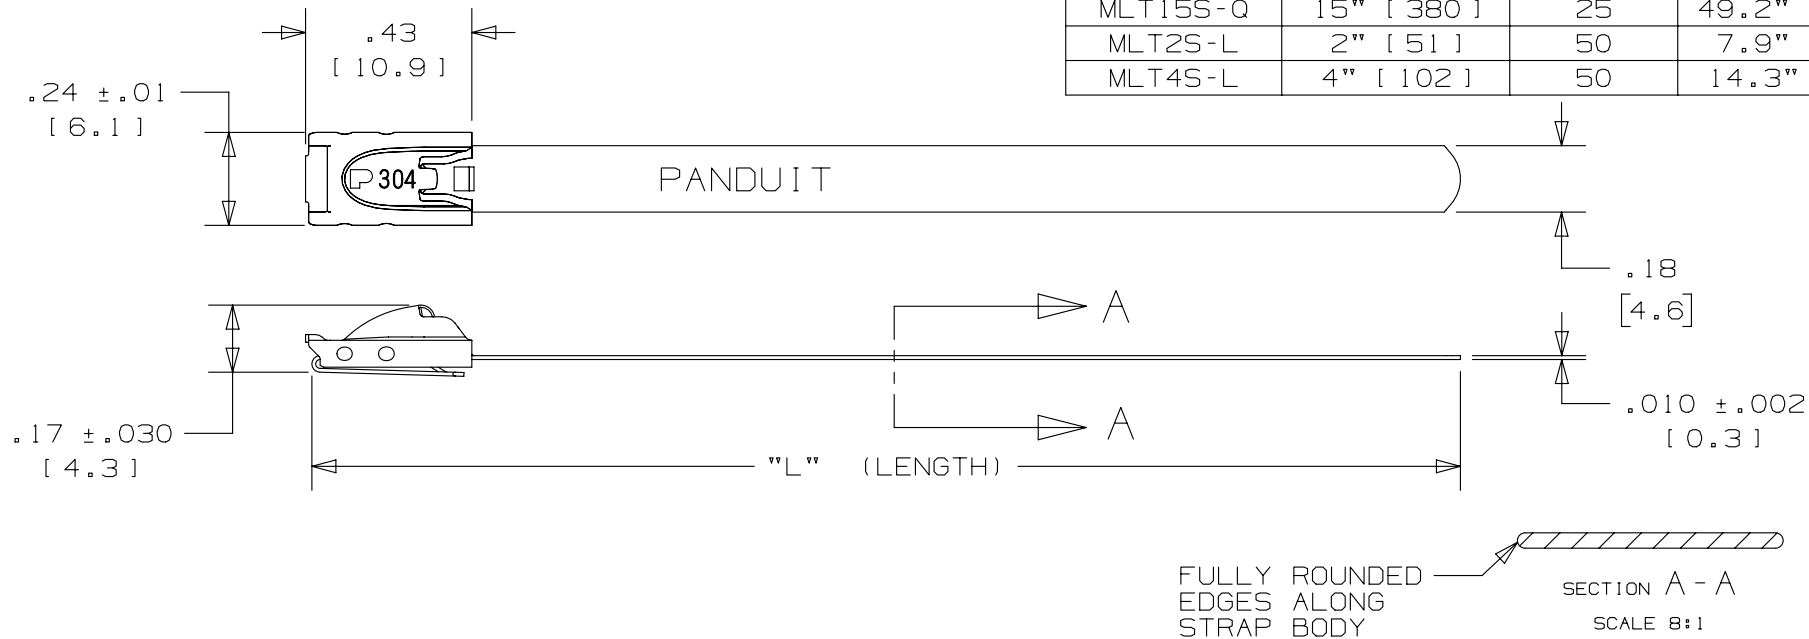


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
NOTES:

1. APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,ST3MT,HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS [889 NEWTONS]
WHEN TESTED ON A 1.5" MANDREL
3. BRACKETS [] DENOTES DIMENSIONS IN MILLIMETERS
AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
.XXX = $\pm .010$ [.25] .XX = $\pm .02$ [.5]
.X = $\pm .03$ [.8] ANGLES = $\pm 2^\circ$
5. MATERIAL: 304 STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L = $\pm .3$ [7]
MLT1S-CP	1" [25]	100	5.0" [127]
MLT2S-CP	2" [51]	100	7.9" [201]
MLT2.7S-CP	2.7" [69]	100	10.2" [259]
MLT4S-CP	4" [102]	100	14.3" [362]
MLT6S-CP	6" [152]	100	20.5" [521]
MLT8S-CP	8" [203]	100	26.8" [679]
MLT10S-CP	10" [254]	100	33.0" [838]
MLT12S-Q	12" [304]	25	39.3" [998]
MLT14S-Q	14" [355]	25	45.5" [1156]
MLT15S-Q	15" [380]	25	49.2" [1250]
MLT2S-L	2" [51]	50	7.9" [201]
MLT4S-L	4" [102]	50	14.3" [362]



							TITLE METAL LOCKING TIE STANDARD SERIES 304 STAINLESS STEEL CUSTOMER DRAWING						
							ITEM REVISION NAME N41119BS/11						
							DATASET FILE NAME N41119BS_DC/11A						
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °			MATERIAL: 304 STAINLESS STEEL			
11A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01037				DRAWING NUMBER: N41119BS_DC			
10A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----	THIRD ANGLE PROJECTION						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1		SIZE
							JAMB	2/12	DPN	2:1			A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[MLT2S-CP](#) [MLT4S-CP](#) [MLT6S-CP](#) [MLT1S-CP](#) [MLT10S-CP](#) [MLT2.7S-CP](#) [MLT2S-L](#) [MLT4S-L](#) [MLT8S-CP](#)
[MLT15S-Q](#) [MLT12S-Q](#) [MLT14S-Q](#)