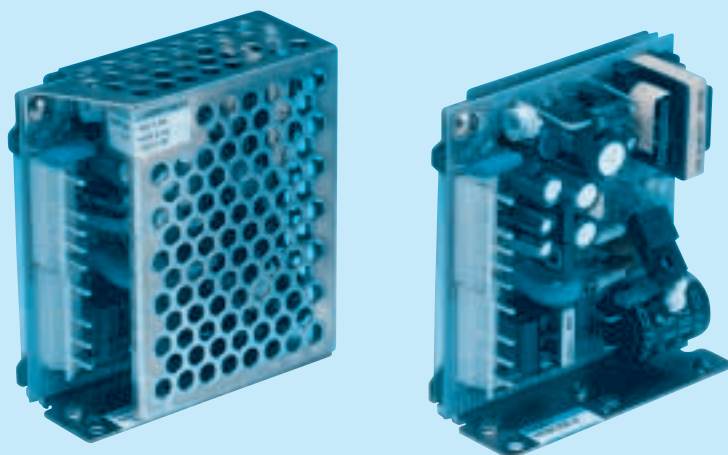


MMC8A

MMC 8A -1 -□

① ② ③ ④

cULus
RoHS

- ① Series name
 ② Output wattage
 ③ Output voltage combination
 ④ Optional *2
 G : Low leakage current
 N : with Cover

MMC

MODEL		MMC8A-1	MMC8A-2	MMC8A-3
DC OUTPUT	V1	+5V 1.2A	+5V 1.1A	+5V 1.2A
	V2	+12V 0.1A	+15V 0.1A	+12V 0.1A
	V3	-12V 0.1A	-15V 0.1A	-5V 0.1A

SPECIFICATIONS

	MODEL	MMC8A-1			MMC8A-2			MMC8A-3			
INPUT	VOLTAGE[V]		AC85 - 132 1 ϕ or DC110 - 170								
	CURRENT[A]	ACIN 100V	0.3typ (Io=100%)								
	FREQUENCY[Hz]		47 - 440 or DC								
	EFFICIENCY[%]	ACIN 100V	68typ (Io=100%)								
	INRUSH CURRENT[A]	ACIN 100V	20typ (Io=100%)								
OUTPUT	VOLTAGE[V]		+5	+12	-12	+5	+15	-15	+5	+12	-5
	CURRENT[A]		1.2	0.1	0.1	1.1	0.1	0.1	1.2	0.1	0.1
	MINIMUM CURRENT[A]		0	0	0	0	0	0	0	0	0
	LINE REGULATION[mV]		20max	48max	48max	20max	60max	60max	20max	48max	20max
	LOAD REGULATION[mV]		60max	120max	120max	60max	150max	150max	60max	120max	100max
	RIPPLE[mVp-p] *1		80max	120max	120max	80max	120max	120max	80max	120max	120max
	RIPPLE NOISE[mVp-p] *1		120max	150max	150max	120max	150max	150max	120max	150max	150max
	TEMPERATURE REGULATION[mV] 0 to +50°C		50max	350max	350max	50max	350max	350max	50max	350max	350max
	START-UP TIME[ms]		100max (ACIN 85V, Io=100%)								
	HOLD-UP TIME[ms]		15typ (ACIN 85V, Io=100%)								
PROTECTION CIRCUIT	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		5.00 - 5.25	Fixed	Fixed	5.00 - 5.25	Fixed	Fixed	5.00 - 5.25	Fixed	Fixed
	OUTPUT VOLTAGE SETTING[V]		——	11.40 to 12.60	-11.40 to -12.60	——	14.25 to 15.75	-14.25 to -15.75	——	11.40 to 12.60	-4.75 to -5.25
ISOLATION	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically								
	INPUT-CASE, OUTPUT		AC2,000V 1minute, DC500V 50M Ω min (At Room Temperature)								
	OUTPUT-CASE		AC500V 1minute, DC500V 50M Ω min (At Room Temperature)								
ENVIRONMENT	OUTPUT-OUTPUT(V1-V2,V3)		AC100V 1minute, DC100V 10M Ω min (At Room Temperature)								
	OPERATING TEMP.,HUMID.AND ALTITUDE		0 to +65°C, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max								
	STORAGE TEMP.,HUMID.AND ALTITUDE		-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max								
	VIBRATION		10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 30minutes each along X, Y and Z axis								
SAFETY AND NOISE REGULATIONS	IMPACT		98.0m/s ² (10G), 20ms, once each X, Y and Z axis								
	AGENCY APPROVALS		UL60950-1, C-UL Complies with DEN-AN								
	CONDUCTED NOISE		Complies with FCC-B								


*1 Measured by 20MHz oscilloscope or Ripple-Noise meter(equivalent to KEISOKU-GIKEN : RM101).

*2 Please contact us about safety approvals for the model with option.

* When units are operated with chassis and cover, derating is required.

* Avoid prolonged use under over-load.


External view

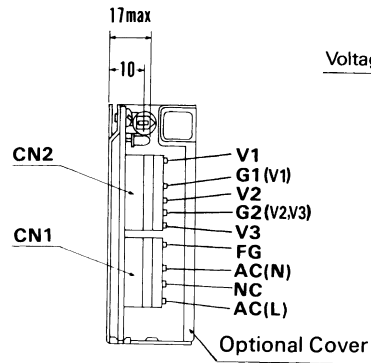

※V1 is isolated from V2 and V3.

I/O Connector	Mating Connector	Terminal
CN1	10-31-1048	10-63-3044
CN2	09-65-2059	09-50-1053

(Mfr: Molex)

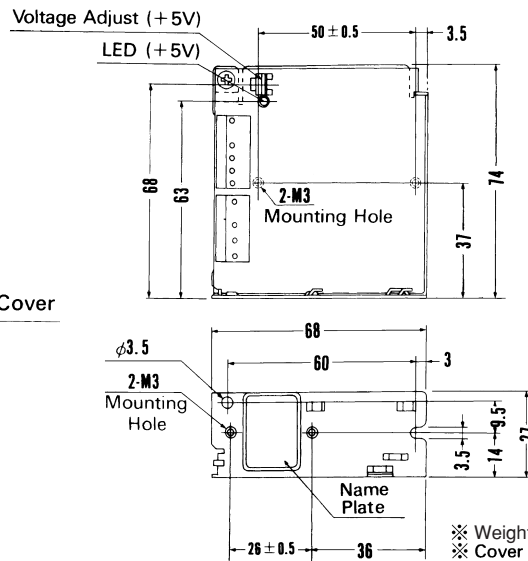


※ Weight : 150g max
 ※ Cover is optional
 ※ Tolerance : ± 1
 ※ Dimensions in mm.


※ Mounting torque : 0.6N·m (6.3kgf·cm) max

Performance data


■ STATIC CHARACTERISTICS (MMC8A-1)

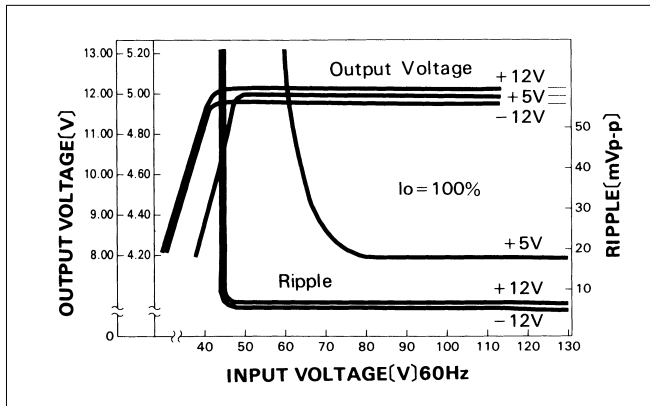


■ RISE TIME & FALL TIME (MMC8A-1)

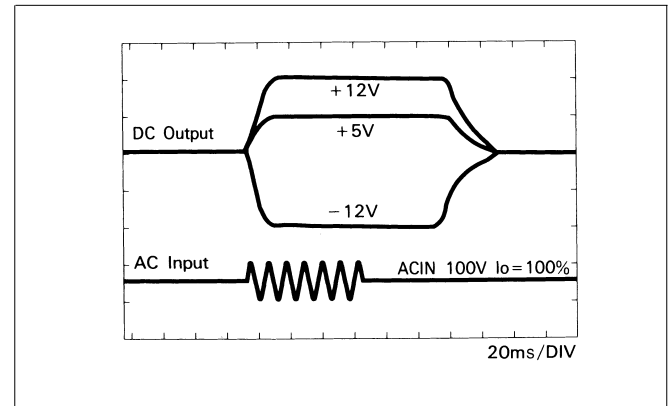

■ OVERCURRENT CHARACTERISTICS (MMC8A-1)

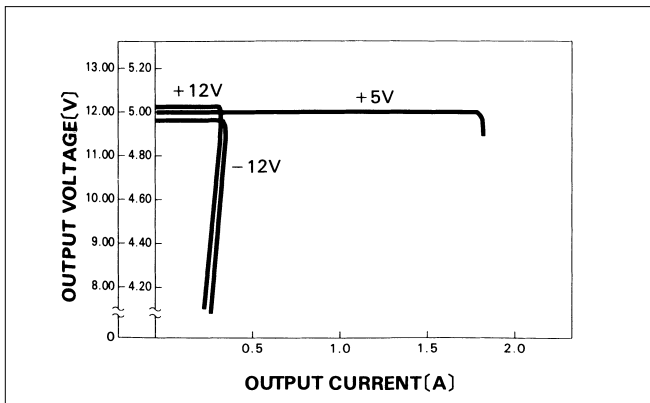



■ DERATING CURVE

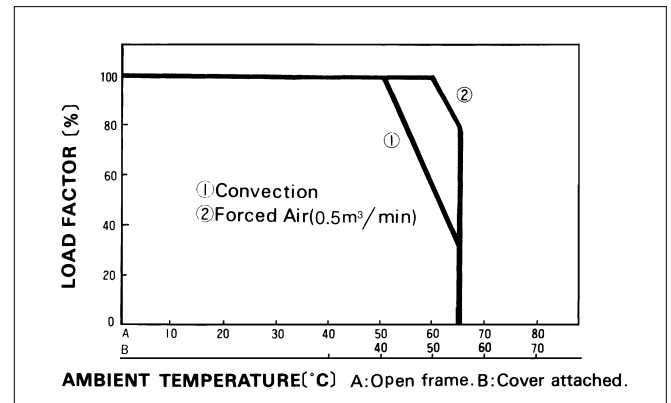

MMC50A

MMC 50A -1 -□

① ② ③ ④

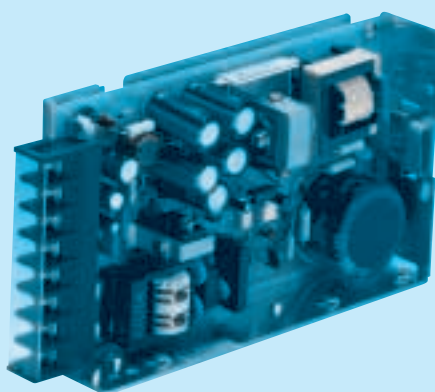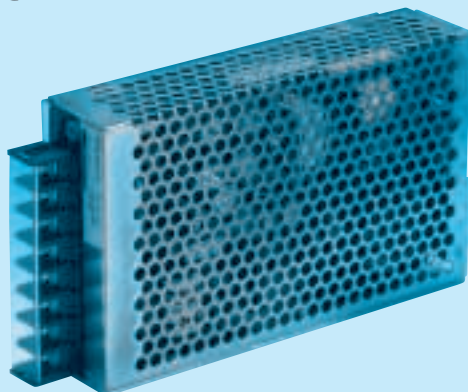c  us
RoHS

- ① Series name
 ② Output wattage
 ③ Output voltage combination
 ④ Optional *3
 C :with Coating
 G :Low leakage current
 J :Connector type
 N :with Cover

MMC

MODEL		MMC50A-1	MMC50A-2	MMC50A-3	MMC50A-4
DC OUTPUT	V1	+5V 5.0A	+5V 5.0A	+5V 5.0A	+5V 7.0A
	V2	+12V 1.5(Peak 2.0)A	+15V 1.2A	+12V 1.5(Peak 2.0)A	+12V 1.0(Peak 1.5)A
	V3	-12V 0.5A	-15V 0.5A	-5V 0.5A	-12V 0.3A

SPECIFICATIONS

	MODEL	MMC50A-1			MMC50A-2			MMC50A-3			MMC50A-4				
INPUT	VOLTAGE[V]		AC85 - 132 1 ϕ or DC110 - 170												
	CURRENT[A]	ACIN 100V	1.5typ (Io=100%)												
	FREQUENCY[Hz]		47 - 440 or DC												
	EFFICIENCY[%]	ACIN 100V	70typ (Io=100%)												
	INRUSH CURRENT[A]	ACIN 100V	30typ (Io=100%) (At cold start)												
OUTPUT	VOLTAGE[V]		+5	+12	-12	+5	+15	-15	+5	+12	-5	+5	+12	-12	
	CURRENT[A]	*1	5	1.5 (Peak2)	0.5	5	1.2	0.5	5	1.5 (Peak2)	0.5	7	1 (Peak1.5)	0.3	
	MINIMUM CURRENT[A]		0.75	0	0	0.75	0	0	0.75	0	0	0.75	0	0	
	LINE REGULATION[mV]		20max	48max	100max	20max	60max	60max	20max	48max	20max	20max	48max	48max	
	LOAD REGULATION[mV]		40max	150max	150max	40max	150max	150max	40max	150max	100max	40max	150max	150max	
	RIPPLE[mVp-p]		*2	80max	120max	120max	80max	120max	120max	80max	120max	120max	80max	120max	120max
	RIPPLE NOISE[mVp-p]		*2	120max	150max	150max	120max	150max	150max	120max	150max	150max	120max	150max	150max
	TEMPERATURE REGULATION[mV]		0 to +50°C	50max	350max	350max	50max	350max	350max	50max	350max	350max	50max	350max	350max
	START-UP TIME[ms]		100max (ACIN 85V, Io=100%)												
	HOLD-UP TIME[ms]		15typ (ACIN 85V, Io=100%)												
PROTECTION CIRCUIT	OVERCURRENT PROTECTION		Works over 105% of rating (V2 works at peak current) and recovers automatically												
	OVERVOLTAGE PROTECTION		Works at 115 - 140% of rating (+5V)												
	ISOLATION														
ISOLATION	INPUT-CASE, OUTPUT		AC2.000V 1minute, DC500V 50M Ω min (At Room Temperature)												
	OUTPUT-CASE		AC500V 1minute, DC500V 50M Ω min (At Room Temperature)												
	OUTPUT-OUTPUT(V1-V2,V3)		AC100V 1minute, DC100V 10M Ω min (At Room Temperature)												
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		0 to +65°C, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max												
	STORAGE TEMP.,HUMID.AND ALTITUDE		-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max												
	VIBRATION		10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 30minutes each along X, Y and Z axis												
SAFETY AND NOISE REGULATIONS	IMPACT		196.1m/s ² (20G), 11ms, once each X, Y and Z axis												
	AGENCY APPROVALS		UL60950-1, C-UL Complies with DEN-AN												
	CONDUCTED NOISE		Complies with FCC-A												

*1 Peak current for 30 seconds.


*2 Measured by 20MHz oscilloscope or Ripple-Noise meter(equivalent to KEISOKU-GIKEN : RM101).

*3 Please contact us about safety approvals for the model with option.

* When units are operated with chassis and cover, derating is required.

* Avoid prolonged use under over-load.

External view




I/O Connector	Mating Connector	Terminal
CN1	10-31-1048	10-63-3044
CN2	09-65-2109	09-50-1103

(Mfr : Molex)

※Use J cover for connector type.

Connector type

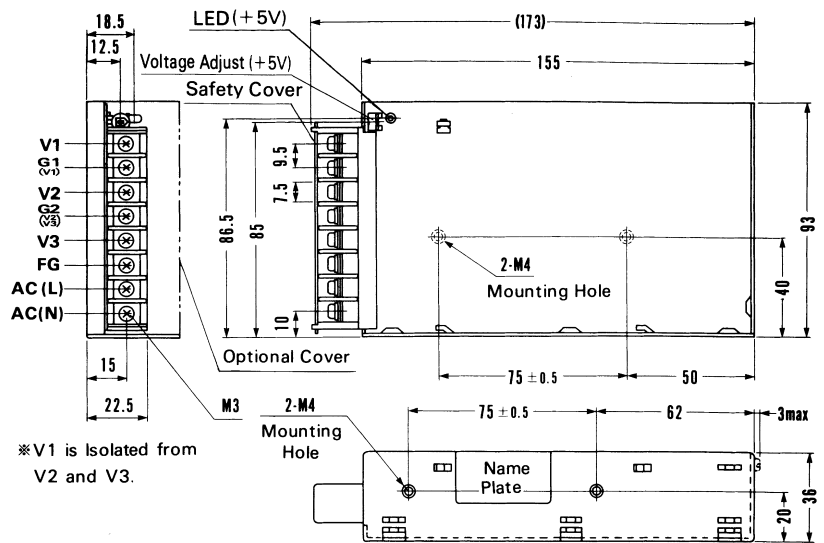

※V1 is isolated from V2 and V3.

※Mounting torque : 1.2N·m (12.8kgf·cm) max

Barrier strip type

※Weight : 400g max


※Cover is optional

※Tolerance : ± 1


※Dimensions in mm.

Performance data


■STATIC CHARACTERISTICS (MMC50A-1)

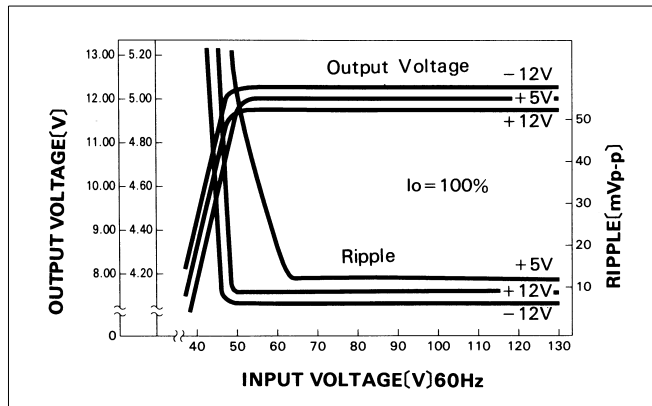


■RISE TIME & FALL TIME (MMC50A-1)

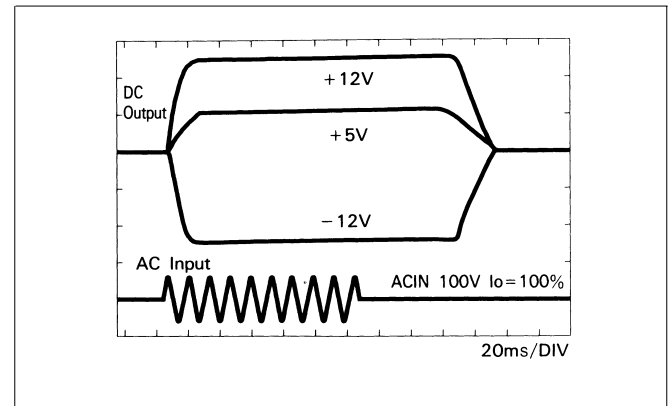

■OVERCURRENT CHARACTERISTICS (MMC50A-1)

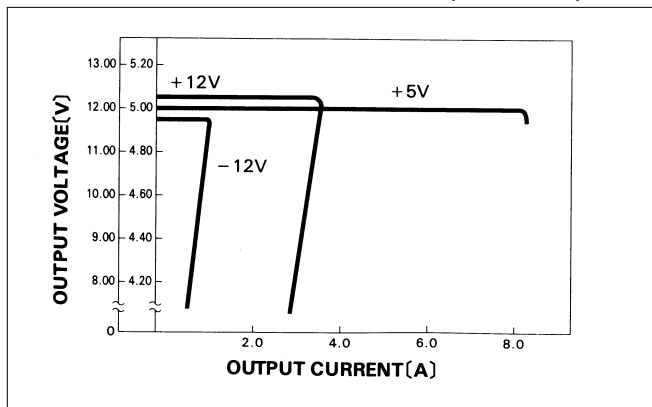


■DERATING CURVE

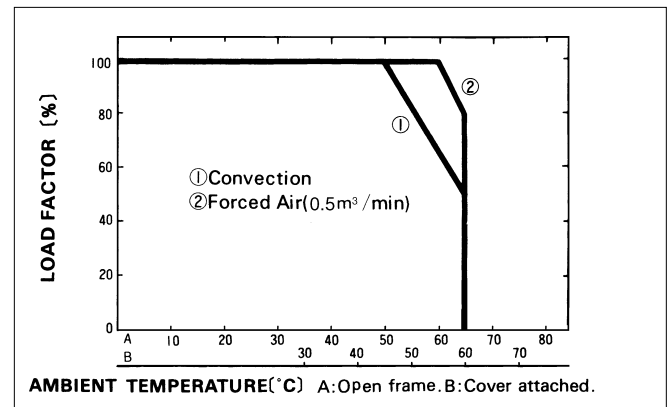

MMC75B

MMC 75B -1 -□

① ② ③ ④

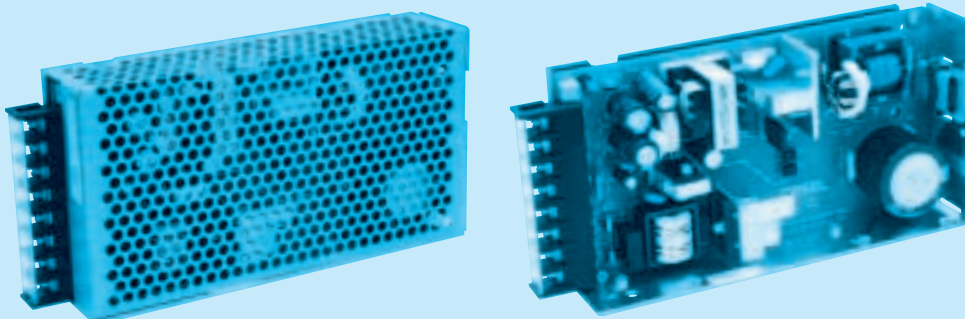cULus
RoHS

- ① Series name
 ② Output wattage
 ③ Output voltage combination
 ④ Optional *2
 C :with Coating
 G :Low leakage current
 J :Connector type
 N :with Cover

MODEL		MMC75B-1	MMC75B-2	MMC75B-3	MMC75B-4
DC OUTPUT	V1	+5V 8.0A	+5V 8.0A	+5V 8.0A	+5V 6.0A
	V2	+12V 2.5A	+15V 1.8A	+12V 2.5A	+12V 3.2A
	V3	-12V 0.5A	-15V 0.5A	-5V 0.5A	-12V 0.5A

SPECIFICATIONS

	MODEL		MMC75B-1			MMC75B-2			MMC75B-3			MMC75B-4		
INPUT	VOLTAGE[V]		AC85 - 132 1 ϕ or DC110 - 170											
	CURRENT[A]	ACIN 100V	2.1typ (Io=100%)											
	FREQUENCY[Hz]		47 - 440 or DC											
	EFFICIENCY[%]	ACIN 100V	75typ (Io=100%)											
	INRUSH CURRENT[A]	ACIN 100V	20typ (Io=100%)											
OUTPUT	VOLTAGE[V]		+5	+12	-12	+5	+15	-15	+5	+12	-5	+5	+12	-12
	CURRENT[A]		8	2.5	0.5	8	1.8	0.5	8	2.5	0.5	6	3.2	0.5
	MINIMUM CURRENT[A]		1.5	0	0	1.5	0	0	1.5	0	0	1.5	0	0
	LINE REGULATION[mV]		20max	48max	48max	20max	60max	60max	20max	48max	20max	20max	48max	100max
	LOAD REGULATION[mV]		40max	100max	150max	40max	120max	150max	40max	100max	100max	40max	100max	150max
	RIPPLE[mVp-p] *1		80max	120max	120max	80max	120max	120max	80max	120max	120max	80max	120max	120max
	RIPPLE NOISE[mVp-p] *1		120max	150max	150max	120max	150max	150max	120max	150max	150max	120max	150max	150max
	TEMPERATURE REGULATION[mV] 0 to +50℃		50max	120max	350max	50max	150max	350max	50max	120max	350max	50max	120max	350max
	START-UP TIME[ms]		200max (ACIN 85V, Io=100%)											
	HOLD-UP TIME[ms]		15typ (ACIN 85V, Io=100%)											
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		5.00 - 5.25	Fixed	Fixed	5.00 - 5.25	Fixed	Fixed	5.00 - 5.25	Fixed	Fixed	5.00 - 5.25	Fixed	Fixed
	OUTPUT VOLTAGE SETTING[V]		——	11.40 to 12.60	-11.40 to -12.60	——	14.25 to 15.75	-14.25 to -15.75	——	11.40 to 12.60	-4.75 to -5.25	——	11.40 to 12.60	-11.40 to -12.60
PROTECTION CIRCUIT	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically											
	OVERVOLTAGE PROTECTION		Works at 115 - 140% of rating (+5V)											
ISOLATION	INPUT-CASE, OUTPUT		AC2.000V 1minute, DC500V 50MΩmin (At Room Temperature)											
	OUTPUT-CASE		AC500V 1minute, DC500V 50MΩmin (At Room Temperature)											
	OUTPUT-OUTPUT(V1-V2,V3)		AC100V 1minute, DC100V 10MΩmin (At Room Temperature)											
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		0 to +65℃, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max											
	STORAGE TEMP.,HUMID.AND ALTITUDE		-20 to +75℃, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max											
	VIBRATION		10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 30minutes each along X, Y and Z axis											
	IMPACT		196.1m/s ² (20G), 11ms, once each X, Y and Z axis											
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		UL60950-1, C-UL Complies with DEN-AN											
	CONDUCTED NOISE		Complies with FCC-A											


*1 Measured by 20MHz oscilloscope or Ripple-Noise meter(equivalent to KEISOKU-GIKEN : RM101).

*2 Please contact us about safety approvals for the model with option.

* When units are operated with chassis and cover, derating is required.

* Avoid prolonged use under over-load.

External view




I/O Connector	Mating Connector	Terminal
CN1	10-31-1048	10-63-3044
CN2	09-65-2109	09-50-1103

(Mfr : Molex)

※Use J cover for connector type.

Connector type

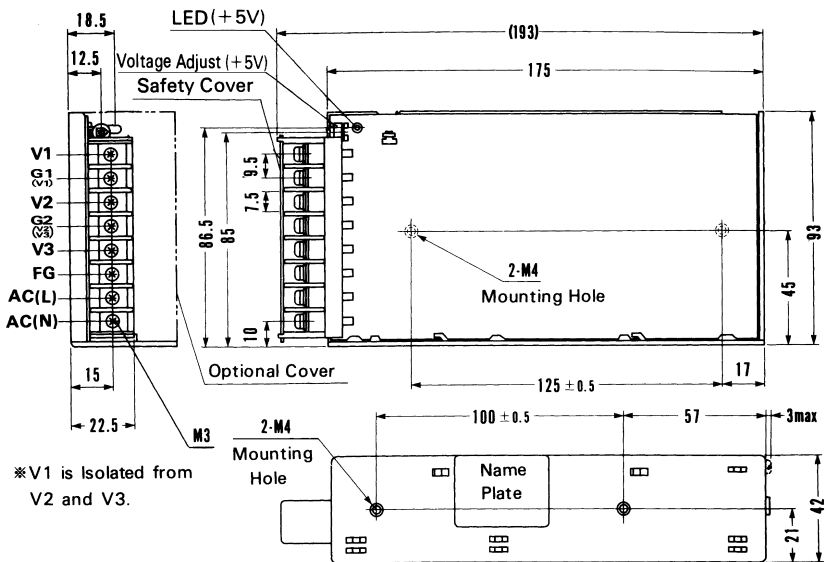

※ Mounting torque : 1.2N·m (12.8kgf·cm) max

Barrier strip type

※ Weight : 600g max


※ Cover is optional

※ Tolerance: ± 1


※ Dimensions in mm.

Performance data


■ STATIC CHARACTERISTICS (MMC75B-4)

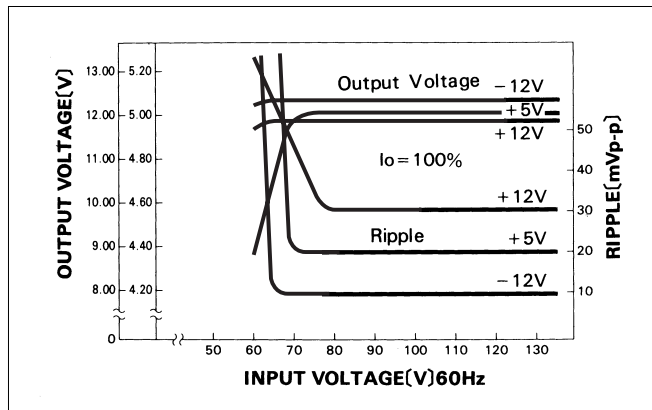


■ RISE TIME & FALL TIME (MMC75B-4)

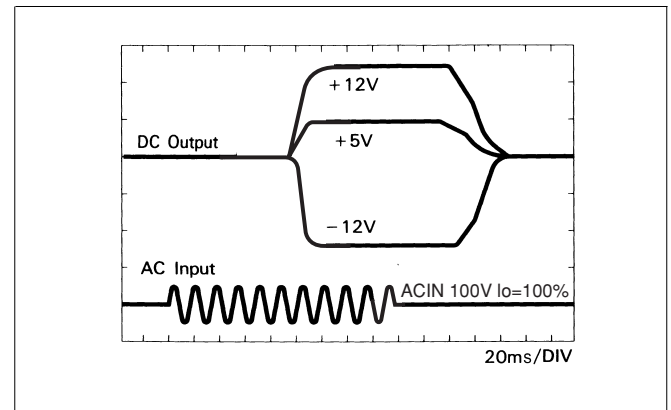

■ OVERCURRENT CHARACTERISTICS (MMC75B-4)

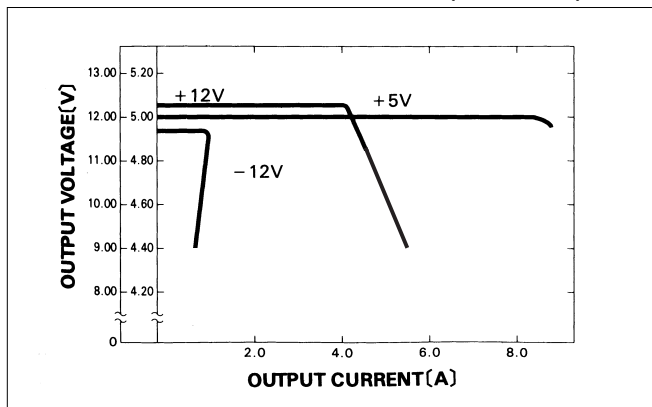



■ DERATING CURVE

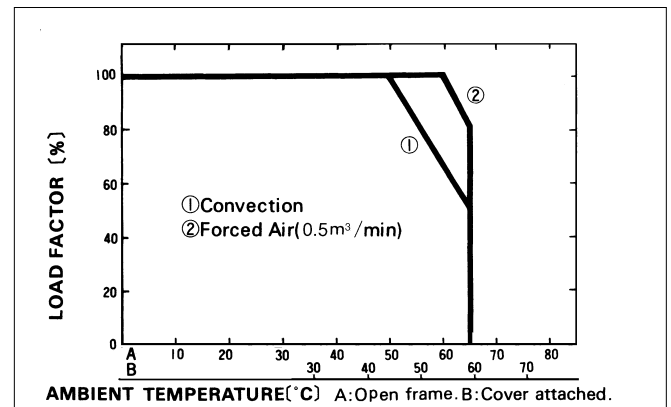

MMC100B

MMC 100B -1 -□

① ② ③ ④

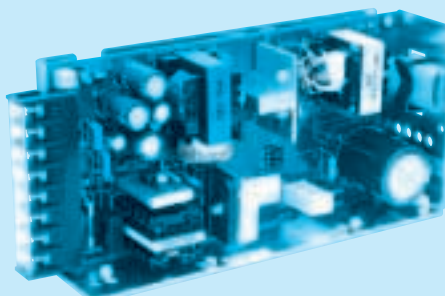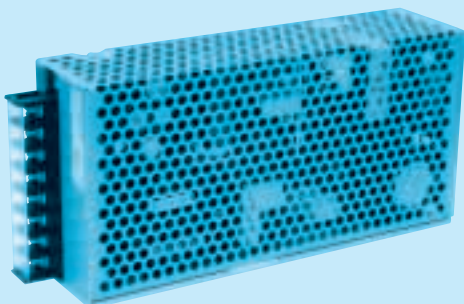cULus
RoHS

- ① Series name
 ② Output wattage
 ③ Output voltage combination
 ④ Optional *2
 C :with Coating
 G :Low leakage current
 J :Connector type
 N :with Cover

MODEL		MMC100B-1	MMC100B-2	MMC100B-3	MMC100B-4
DC OUTPUT	V1	+5V 13.0A	+5V 13.0A	+5V 13.0A	+5V 8.0A
	V2	+12V 2.0A	+15V 1.5A	+12V 2.0A	+12V 4.0A
	V3	-12V 1.0A	-15V 1.0A	-5V 1.0A	-12V 1.0A

SPECIFICATIONS

	MODEL		MMC100B-1			MMC100B-2			MMC100B-3			MMC100B-4		
INPUT	VOLTAGE[V]		AC85 - 132 1 ϕ or DC110 - 170											
	CURRENT[A]	ACIN 100V	2.8typ (Io=100%)											
	FREQUENCY[Hz]		47 - 440 or DC											
	EFFICIENCY[%]	ACIN 100V	75typ (Io=100%)											
	INRUSH CURRENT[A]	ACIN 100V	25typ (Io=100%)											
OUTPUT	VOLTAGE[V]		+5	+12	-12	+5	+15	-15	+5	+12	-5	+5	+12	-12
	CURRENT[A]		13	2	1	13	1.5	1	13	2	1	8	4	1
	MINIMUM CURRENT[A]		1.5	0	0	1.5	0	0	1.5	0	0	1.5	0	0
	LINE REGULATION[mV]		20max	48max	48max	20max	60max	60max	20max	48max	20max	20max	48max	100max
	LOAD REGULATION[mV]		40max	100max	150max	40max	120max	150max	40max	100max	100max	40max	100max	150max
	RIPPLE[mVp-p] *1		80max	120max	120max	80max	120max	120max	80max	120max	120max	80max	120max	120max
	RIPPLE NOISE[mVp-p] *1		120max	150max	150max	120max	150max	150max	120max	150max	150max	120max	150max	150max
	TEMPERATURE REGULATION[mV] 0 to +50℃		50max	120max	350max	50max	150max	350max	50max	120max	350max	50max	120max	350max
	START-UP TIME[ms]		200max (ACIN 85V, Io=100%)											
	HOLD-UP TIME[ms]		15typ (ACIN 85V, Io=100%)											
PROTECTION CIRCUIT	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically											
	OVERVOLTAGE PROTECTION		Works at 115 - 140% of rating (+5V)											
ISOLATION	INPUT-CASE, OUTPUT		AC2.000V 1minute, DC500V 50M Ω min (At Room Temperature)											
	OUTPUT-CASE		AC500V 1minute, DC500V 50M Ω min (At Room Temperature)											
	OUTPUT-OUTPUT(V1-V2,V3)		AC100V 1minute, DC100V 10M Ω min (At Room Temperature)											
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		0 to +65℃, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3.000m (10.000feet) max											
	STORAGE TEMP.,HUMID.AND ALTITUDE		-20 to +75℃, 20 - 90%RH (Non condensing), 9.000m (30.000feet) max											
	VIBRATION		10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 30minutes each along X, Y and Z axis											
SAFETY AND NOISE REGULATIONS	IMPACT		196.1m/s ² (20G), 11ms, once each X, Y and Z axis											
	AGENCY APPROVALS		UL60950-1, C-UL Complies with DEN-AN											
	CONDUCTED NOISE		Complies with FCC-A											


*1 Measured by 20MHz oscilloscope or Ripple-Noise meter(equivalent to KEISOKU-GIKEN : RM101).

*2 Please contact us about safety approvals for the model with option.

* When units are operated with chassis and cover, derating is required.

* Avoid prolonged use under over-load.


External view



I/O Connector	Mating Connector	Terminal
CN1	10-31-1048	10-63-3044
CN2	09-65-2109	09-50-1103

Chain : 08-70-1031
Loose : 08-70-1030
(Mfr : Molex)

Connector type

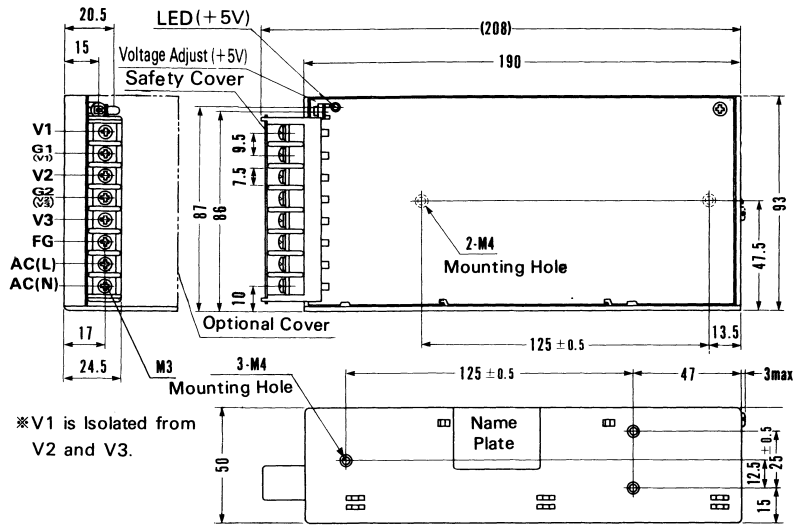

※ V1 is Isolated from V2 and V3.

※ Mounting torque : 1.2N·m (12.8kgf·cm) max

※ Weight : 700g max

※ Cover is optional.


※ Tolerance: ±1

※ Dimensions in mm.


Barrier strip type

Performance data


■ STATIC CHARACTERISTICS (MMC100B-4)

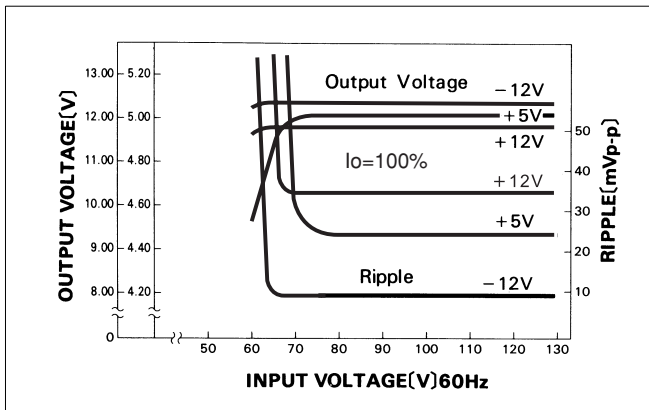


■ RISE TIME & FALL TIME (MMC100B-4)

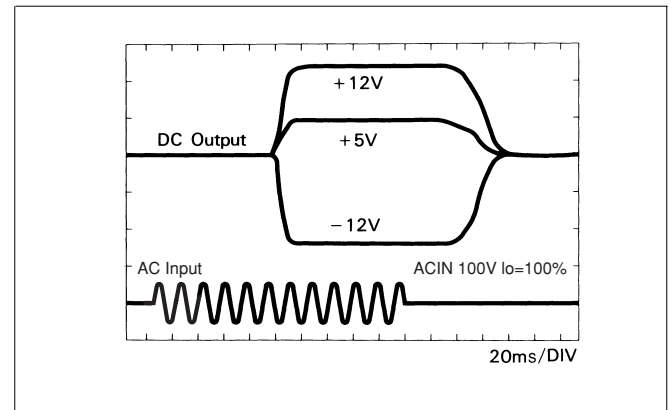

■ OVERCURRENT CHARACTERISTICS (MMC100B-4)

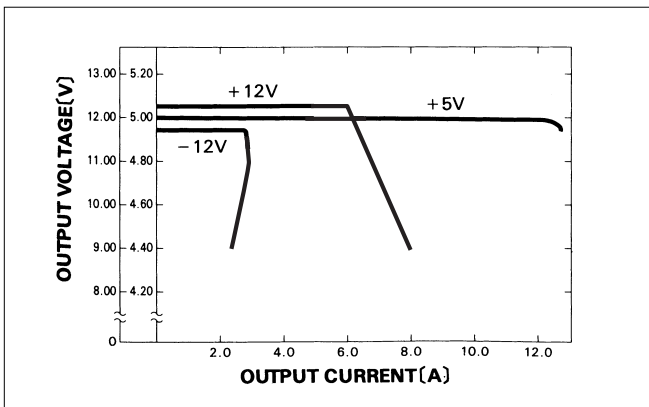

■ DERATING CURVE

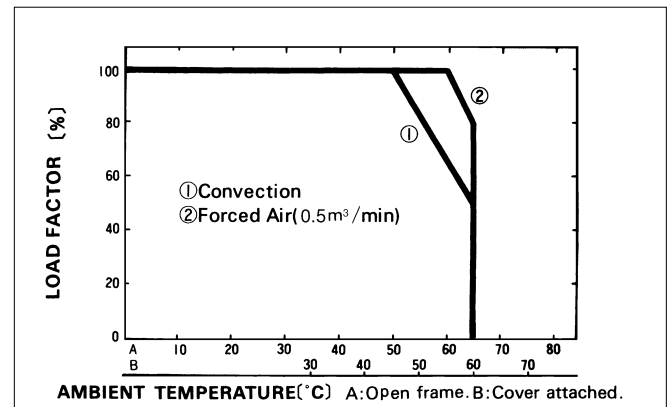

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

[MMC75B-2-J](#) [MMC100B-1-CN](#) [MMC100B-4](#) [MMC75A-3-J](#) [MMC50A-1-J](#) [MMC50A-1-N](#) [MMC50A-2-N](#) [MMC75B-4](#)
[MMC8A-2](#) [MMC75B-1-C](#) [MMC50A-1](#) [MMC75A-4-J](#) [MMC100B-3-J](#) [MMC100B-2-C](#) [MMC75A-2](#) [MMC50A-3-J](#)
[MMC75A-1-G](#) [MMC75B-3-J](#) [MMC75B-2-CN](#) [MMC50A-4-J](#) [MMC75A-2-J](#) [MMC50A-2-GN](#) [MMC8A-1](#) [MMC75B-1-G](#)
[MMC100B-4-N](#) [MMC100B-3-N](#) [MMC8A-3](#) [MMC100B-4-G](#) [MMC75B-2-C](#) [MMC50A-1-GN](#) [MMC75B-3-N](#) [MMC50A-4-](#)
[N](#) [MMC8A-1-N](#) [MMC75A-2-G](#) [MMC75B-3-G](#) [MMC75B-1-CN](#) [MMC100B-2-J](#) [MMC50A-4-CN](#) [MMC75A-1-N](#)
[MMC75B-1](#) [MMC50A-2-CN](#) [MMC75B-3](#) [MMC75B-4-G](#) [MMC100B-1-J](#) [MMC75B-1-JN](#) [MMC75B-4-N](#) [MMC75A-4](#)
[MMC100B-3-G](#) [MMC100B-3](#) [MMC75B-2-GN](#) [MMC50A-2-JN](#) [MMC100B-1-C](#) [MMC75B-2-N](#) [MMC75A-3-N](#) [MMC8A-](#)
[2-N](#) [MMC75B-1-J](#) [MMC50A-2-C](#) [MMC50A-2-J](#) [MMC50A-4-JN](#) [MMC75B-1-CJ](#) [MMC100B-1](#) [MMC75B-2-JN](#)
[MMC100B-2](#) [MMC50A-3-CN](#) [MMC50A-1-MN](#) [MMC75B-4-CN](#) [MMC100B-4-CN](#) [MMC75A-1-CN](#) [MMC100B-1-GN](#)
[MMC8A-3-N](#) [MMC75A-3-JN](#) [MMC75A-4-N](#) [MMC50A-1-CN](#) [MMC50A-3-N](#) [MMC100B-2-N](#) [MMC75B-2](#) [MMC100B-2-](#)
[G](#) [MMC75A-1-JN](#) [MMC75A-3](#) [MMC75B-3-CN](#) [MMC75B-4-JN](#) [MMC75B-3-JN](#) [MMC75B-4-C](#) [MMC75A-1-CJ](#)
[MMC100B-4-C](#) [MMC8A-1-C](#) [MMC100B-3-JN](#) [MMC75A-2-N](#) [MMC100B-4-J](#) [MMC100B-3-C](#) [MMC100B-3-CN](#)
[MMC50A-3](#) [MMC8A-2-C](#) [MMC8A-3-C](#) [MMC75B-1-N](#) [MMC75B-3-C](#) [MMC50A-2](#) [MMC100B-1-G](#) [MMC75B-4-J](#)
[MMC75B-1-GN](#)