

SURFACE MOUNT ZENER DIODE

VOLTAGE RANGE 1.8 to 43 Volts POWER RATING 500 mWatts

FEATURES

- * Wide Zener Reverse Voltage Range : 1.8V to 43V
- * 500mW Rating on FR-4 or FR-5 Board
- * Small Package Size for High Density Applications
- * Ideally Suited for Automated Assembly Processes
- * ESD Rating of Class 3 (>16kV) per Human Body Model

MECHANICAL DATA



- * Case: Molded plastic
- * Epoxy: UL 94V-O rate flame retardant
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 0.01 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.



SOD-123



Dimensions in inches and (millimeters)

MAXIMUM RATINGS (@ TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	VALUE	UNITS
Max. Power Dissipation on FR-5 Board, @T _L =75°C (Note 1)	P _D	500	mW
Derated above 75°C		6.7	mW/°C
Max. Operating Temperature Range	T _J	150	°C
Storage Temperature Range	T _{STG}	-65 to +150	°C

ELECTRICAL CHARACTERISTICS (@ TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS
Thermal Resistance Junction to Ambient (Note 2)	R _{θJA}	-	-	340	°C/W
Thermal Resistance Junction to Lead (Note 2)	R _{θJL}	-	-	150	°C/W
Max. Instantaneous Forward Voltage at I _F = 10mA	V _F	-	-	0.95	Volts

Note 1. FR-5 = 3.5 X 1.5 inches, using the minimum recommended footprint.
2. Thermal Resistance measurement obtained via infrared Scan Method.

2007-3

ELECTRICAL CHARACTERISTICS (@TA=25°C unless otherwise specified)

Device	Device Marking	Zener Voltage (Note 3)				Leakage Current	
		V _Z (Volts)			@ I _{ZT}	I _R @ V _R	
		Min	Nom	Max	uA	uA	Volts
MMSZ4678T1, G	CC	1.71	1.8	1.89	50	7.5	1
MMSZ4679T1, G	CD	1.90	2.0	2.10	50	5	1
MMSZ4680T1, G	CE	2.09	2.2	2.31	50	4	1
MMSZ4681T1, G	CF	2.28	2.4	2.52	50	2	1
MMSZ4682T1, G	CH	2.565	2.7	2.835	50	1	1
MMSZ4683T1	CJ	2.85	3.0	3.15	50	0.8	1
MMSZ4684T1, G	CK	3.13	3.3	3.47	50	7.5	1.5
MMSZ4685T1, G	CM	3.42	3.6	3.78	50	7.5	2
MMSZ4686T1	CN	3.70	3.9	4.10	50	5	2
MMSZ4687T1, G	CP	4.09	4.3	4.52	50	4	2
MMSZ4688T1	CT	4.47	4.7	4.94	50	10	3
MMSZ4689T1, G	CU	4.85	5.1	5.36	50	10	3
MMSZ4690T1, G	CV	5.32	5.6	5.88	50	10	4
MMSZ4691T1	CA	5.89	6.2	6.51	50	10	5
MMSZ4692T1, G	CX	6.46	6.8	7.14	50	10	5.1
MMSZ4693T1	CY	7.13	7.5	7.88	50	10	5.7
MMSZ4694T1	CZ	7.79	8.2	8.61	50	1	6.2
MMSZ4695T1, G	DC	8.27	8.7	9.14	50	1	6.6
MMSZ4696T1, G	DD	8.65	9.1	9.56	50	1	6.9
MMSZ4697T1, G	DE	9.50	10	10.50	50	1	7.6
MMSZ4698T1	DF	10.45	11	11.55	50	0.05	8.4
MMSZ4699T1, G	DH	11.40	12	12.60	50	0.05	9.1
MMSZ4700T1	DJ	12.35	13	13.65	50	0.05	9.8
MMSZ4701T1	DK	13.30	14	14.70	50	0.05	10.6
MMSZ4702T1, G	DM	14.25	15	15.75	50	0.05	11.4
MMSZ4703T1, G*	DN	15.20	16	16.80	50	0.05	12.1
MMSZ4704T1	DP	16.15	17	17.85	50	0.05	12.9
MMSZ4705T1	DT	17.10	18	18.90	50	0.05	13.6
MMSZ4706T1	DU	18.05	19	19.95	50	0.05	14.4
MMSZ4707T1	DV	19.00	20	21.00	50	0.01	15.2
MMSZ4708T1	DA	20.90	22	23.10	50	0.01	16.7
MMSZ4709T1, G	DX	22.80	24	25.20	50	0.01	18.2
MMSZ4710T1, G	DY	23.75	25	26.25	50	0.01	19.0
MMSZ4711T1*	EA	25.65	27	28.35	50	0.01	20.4
MMSZ4712T1	EC	26.60	28	29.40	50	0.01	21.2
MMSZ4713T1, G	ED	28.50	30	31.50	50	0.01	22.8
MMSZ4714T1	EE	31.35	33	34.65	50	0.01	25.0
MMSZ4715T1	EF	34.20	36	37.80	50	0.01	27.3
MMSZ4716T1	EH	37.05	39	40.95	50	0.01	29.6
MMSZ4717T1, G	EJ	40.85	43	45.15	50	0.01	32.6

Note 3. Nominal Zener voltage is measured with the device junction in thermal equilibrium at T_L = 30°C ±1°C.

*Not Available in the 10,000/Tape & Reel.

**The "G" suffix indicates Pb-Free package available.

RATING AND CHARACTERISTICS CURVES (MMSZ4687T1-MMSZ4717T1)

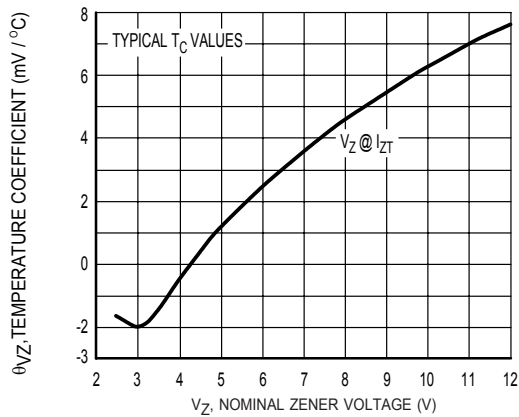


Figure 1 Temperature Coefficients
(Temperature Range -55°C to +150°C)

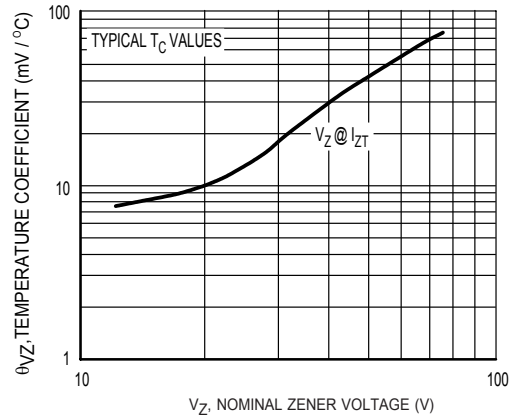


Figure 2 Temperature Coefficients
(Temperature Range -55°C to +150°C)

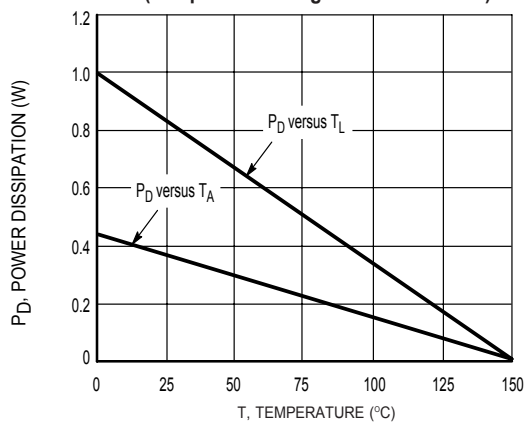


Figure 3 Steady State Power Derating

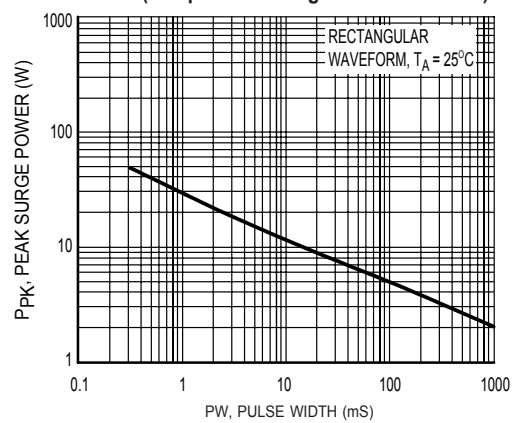


Figure 4 Maximum Nonrepetitive Surge Power

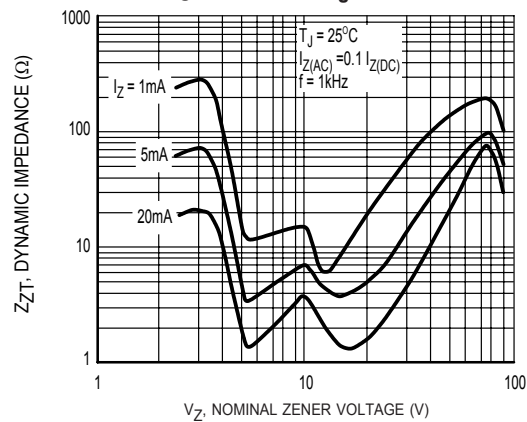


Figure 5 Effect of Zener Voltage on
Zener Impedance

RATING AND CHARACTERISTICS CURVES (MMSZ4687T1-MMSZ4717T1)

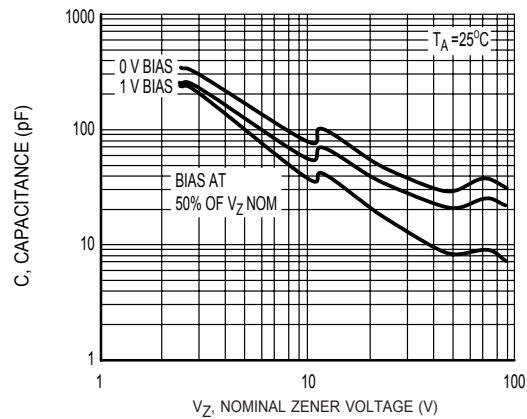


Figure 7 Typical Capacitance

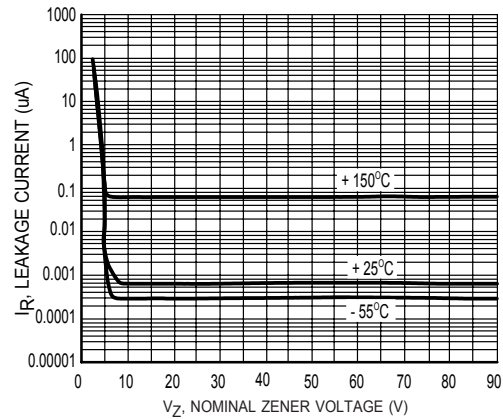


Figure 8 Typical Leakage Current

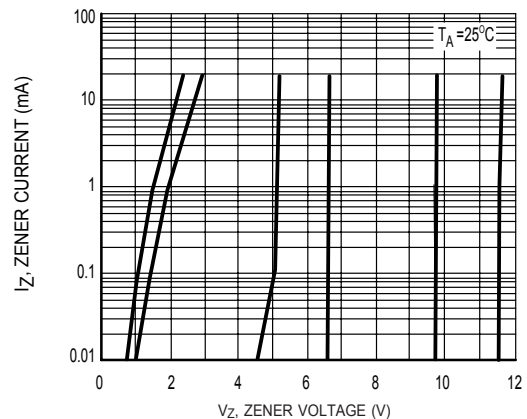


Figure 9 Zener Voltage vs. Zener Current
(V_Z Up to 12V)

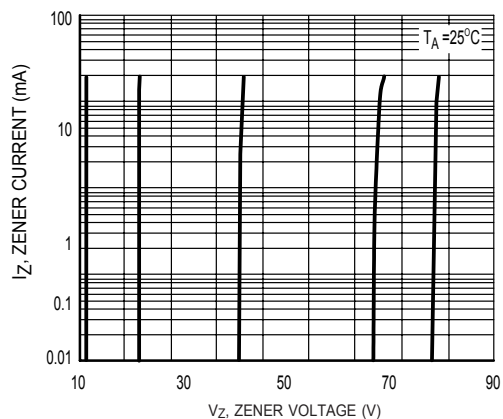


Figure 10 Zener Voltage vs. Zener Current
(12 V to 43V)

DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.