

MMUN2111LT1G, SMMUN2111LT1G, NSVMMUN2111LT1G Series

Bias Resistor Transistors

PNP Silicon Surface Mount Transistors with Monolithic Bias Resistor Network

This new series of digital transistors is designed to replace a single device and its external resistor bias network. The BRT (Bias Resistor Transistor) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space. The device is housed in the SOT-23 package which is designed for low power surface mount applications.

Features

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- The SOT-23 package can be soldered using wave or reflow. The modified gull-winged leads absorb thermal stress during soldering eliminating the possibility of damage to the die.
- Available in 8 mm embossed tape and reel.
- AEC-Q101 Qualified and PPAP Capable
- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant*

MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

Rating	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	50	Vdc
Collector-Emitter Voltage	V _{CEO}	50	Vdc
Collector Current	I _C	100	mAdc


Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.




ON Semiconductor®


<http://onsemi.com>



SOT-23
CASE 318
STYLE 6

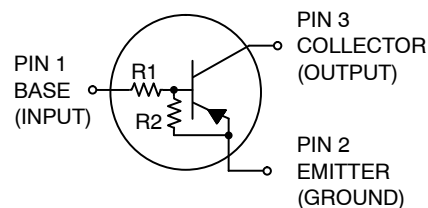

MARKING DIAGRAM



A6x = Device Code
x = A - L (Refer to page 2)
M = Date Code*
▪ = Pb-Free Package

(Note: Microdot may be in either location)

*Date Code orientation may vary depending upon manufacturing location.

ORDERING INFORMATION

Device	Package	Shipping†
MMUN21xxLT1G	SOT-23 (Pb-Free)	3,000 / Tape & Reel
SMMUN21xxLT1G	SOT-23 (Pb-Free)	3,000 / Tape & Reel
MMUN21xxLT3G	SOT-23 (Pb-Free)	10,000 / Tape & Reel
SMMUN21xxLT3G	SOT-23 (Pb-Free)	10,000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

DEVICE MARKING INFORMATION

See specific marking information in the device marking table on page 2 of this data sheet.

MMUN2111LT1G, SMMUN2111LT1G, NSVMMUN2111LT1G Series

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	246 (Note 1) 400 (Note 2) 2.0 (Note 1) 3.2 (Note 2)	MW mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	508 (Note 1) 311 (Note 2)	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Lead	$R_{\theta JL}$	174 (Note 1) 208 (Note 2)	$^\circ\text{C/W}$
Junction and Storage, Temperature Range	T_J, T_{stg}	-55 to $+150$	$^\circ\text{C}$

- FR-4 @ Minimum Pad
- FR-4 @ 1.0 x 1.0 inch Pad

DEVICE MARKING AND RESISTOR VALUES

Device*	Package	Marking	R1 (K)	R2 (K)	Shipping
MMUN2111LT1G, SMMUN2111LT1G MMUN2111LT3G, SMMUN2111LT3G	SOT-23	A6A	10	10	3,000/Tape & Reel 10,000/Tape & Reel
MMUN2112LT1G	SOT-23	A6B	22	22	3,000/Tape & Reel
MMUN2113LT1G, SMMUN2113LT1G MMUN2113LT3G	SOT-23	A6C	47	47	3,000/Tape & Reel 10,000/Tape & Reel
MMUN2114LT1G, SMMUN2114LT1G MMUN2114LT3G	SOT-23	A6D	10	47	3,000/Tape & Reel 10,000/Tape & Reel
MMUN2115LT1G	SOT-23	A6E	10	∞	3,000/Tape & Reel
MMUN2116LT1G, SMMUN2116LT1G, SMMUN2116LT3G	SOT-23	A6F	4.7	∞	3,000/Tape & Reel 10,000/Tape & Reel
MMUN2130LT1G (Note 3)	SOT-23	A6G	1.0	1.0	3,000/Tape & Reel
MMUN2131LT1G (Note 3)	SOT-23	A6H	2.2	2.2	3,000/Tape & Reel
MMUN2132LT1G, NSVMMUN2132LT1G	SOT-23	A6J	4.7	4.7	3,000/Tape & Reel
MMUN2133LT1G	SOT-23	A6K	4.7	47	3,000/Tape & Reel
MMUN2134LT1G, SMMUN2134LT1G (Note 3)	SOT-23	A6L	22	47	3,000/Tape & Reel

*The "G" suffix indicates Pb-Free package available.

- New devices. Updated curves to follow in subsequent data sheets.

MMUN2111LT1G, SMMUN2111LT1G, NSVMMUN2111LT1G Series

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Base Cutoff Current (V _{CB} = 50 V, I _E = 0)	I _{CBO}	–	–	100	nAdc
Collector-Emitter Cutoff Current (V _{CE} = 50 V, I _B = 0)	I _{CEO}	–	–	500	nAdc
Emitter-Base Cutoff Current (V _{EB} = 6.0 V, I _C = 0) MMUN2111LT1G, SMMUN2111LT1G MMUN2112LT1G MMUN2113LT1G, SMMUN2113LT1G MMUN2114LT1G, SMMUN2114LT1G MMUN2115LT1G MMUN2116LT1G, SMMUN2116LT1G MMUN2130LT1G MMUN2131LT1G MMUN2132LT1G, NSVMMUN2132LT1G MMUN2133LT1G MMUN2134LT1G, SMMUN2134LT1G	I _{EBO}	– – – – – – – – – – – – –	– – – – – – – – – – – – –	0.5 0.2 0.1 0.2 0.9 1.9 4.3 2.3 1.5 0.18 0.13	mAdc
Collector-Base Breakdown Voltage (I _C = 10 µA, I _E = 0)	V _{(BR)CBO}	50	–	–	Vdc
Collector-Emitter Breakdown Voltage (Note 4) (I _C = 2.0 mA, I _B = 0)	V _{(BR)CEO}	50	–	–	Vdc

4. Pulse Test: Pulse Width < 300 µs, Duty Cycle < 2.0%

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Typ	Max	Unit
ON CHARACTERISTICS (Note 5)					
DC Current Gain (V _{CE} = 10 V, I _C = 5.0 mA) MMUN2111LT1G, SMMUN2111LT1G MMUN2112LT1G MMUN2113LT1G, SMMUN2113LT1G MMUN2114LT1G, SMMUN2114LT1G MMUN2115LT1G MMUN2116LT1G, SMMUN2116LT1G MMUN2130LT1G MMUN2131LT1G MMUN2132LT1G, NSVMMUN2132LT1G MMUN2133LT1G MMUN2134LT1G, SMMUN2134LT1G	h _{FE}	35 60 80 80 160 160 3.0 8.0 15 80 80	60 100 140 140 250 250 5.0 15 27 140 130	– – – – – – – – – – –	
Collector-Emitter Saturation Voltage (I _C = 10 mA, I _B = 0.3 mA) MMUN2111LT1G, SMMUN2111LT1G MMUN2112LT1G MMUN2113LT1G, SMMUN2113LT1G MMUN2114LT1G, SMMUN2114LT1G (I _C = 10 mA, I _B = 5 mA) MMUN2130LT1G MMUN2131LT1G (I _C = 10 mA, I _B = 1 mA) MMUN2115LT1G MMUN2116LT1G, SMMUN2116LT1G MMUN2132LT1G, NSVMMUN2132LT1G MMUN2133LT1G MMUN2134LT1G, SMMUN2134LT1G	V _{CE(sat)}	– – – – – – – – – – – – – – –	– – – – – – – – – – – – – – –	0.25 0.25 0.25 0.25 0.25 0.25 0.25 0.25 0.25 0.25 0.25 0.25 0.25 0.25 0.25	Vdc

MMUN2111LT1G, SMMUN2111LT1G, NSVMMUN2111LT1G Series

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Typ	Max	Unit
ON CHARACTERISTICS (Note 5)					
Output Voltage (on) (V _{CC} = 5.0 V, V _B = 2.5 V, R _L = 1.0 kΩ) MMUN2111LT1G, SMMUN2111LT1G MMUN2112LT1G MMUN2114LT1G, SMMUN2114LT1G MMUN2115LT1G MMUN2116LT1G, SMMUN2116LT1G MMUN2130LT1G MMUN2131LT1G MMUN2132LT1G, NSVMMUN2132LT1G MMUN2133LT1G MMUN2134LT1G, SMMUN2134LT1G (V _{CC} = 5.0 V, V _B = 3.5 V, R _L = 1.0 kΩ) MMUN2113LT1G, SMMUN2113LT1G	V _{OL}	– – – – – – – – – – –	– – – – – – – – – – –	0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2	Vdc
Output Voltage (off) (V _{CC} = 5.0 V, V _B = 0.5 V, R _L = 1.0 kΩ) MMUN2111LT1G, SMMUN2111LT1G MMUN2112LT1G MMUN2113LT1G, SMMUN2113LT1G MMUN2114LT1G, SMMUN2114LT1G MMUN2133LT1G MMUN2134LT1G, SMMUN2134LT1G (V _{CC} = 5.0 V, V _B = 0.25 V, R _L = 1.0 kΩ) MMUN2115LT1G MMUN2116LT1G, SMMUN2116LT1G MMUN2131LT1G MMUN2132LT1G, NSVMMUN2132LT1G (V _{CC} = 5.0 V, V _B = 0.050 V, R _L = 1.0 kΩ) MMUN2130LT1G	V _{OH}	4.9 4.9 4.9 4.9 4.9 4.9 4.9 4.9 4.9 4.9 4.9	– – – – – – – – – – –	– – – – – – – – – – –	Vdc
Input Resistor MMUN2111LT1G, SMMUN2111LT1G MMUN2112LT1G MMUN2113LT1G, SMMUN2113LT1G MMUN2114LT1G, SMMUN2114LT1G MMUN2115LT1G MMUN2116LT1G, SMMUN2116LT1G MMUN2130LT1G MMUN2131LT1G MMUN2132LT1G, NSVMMUN2132LT1G MMUN2133LT1G MMUN2134LT1G, SMMUN2134LT1G	R ₁	7.0 15.4 32.9 7.0 7.0 3.3 0.7 1.5 3.3 3.3 15.4	10 22 47 10 10 4.7 1.0 2.2 4.7 4.7 22	13 28.6 61.1 13 13 6.1 1.3 2.9 6.1 6.1 28.6	kΩ
Resistor Ratio MMUN2111LT1G, SMMUN2111LT1G MMUN2112LT1G MMUN2113LT1G, SMMUN2113LT1G MMUN2114LT1G, SMMUN2114LT1G MMUN2115LT1G MMUN2116LT1G, SMMUN2116LT1G MMUN2130LT1G MMUN2131LT1G MMUN2132LT1G, NSVMMUN2132LT1G MMUN2133LT1G MMUN2134LT1G, SMMUN2134LT1G	R ₁ /R ₂	0.8 0.8 0.8 0.17 – – 0.8 0.8 0.8 0.055 0.38	1.0 1.0 1.0 0.21 – – 1.0 1.0 1.0 0.1 0.47	1.2 1.2 1.2 0.25 – – 1.2 1.2 1.2 0.185 0.56	

5. Pulse Test: Pulse Width < 300 μs, Duty Cycle < 2.0%

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2111LT1, SMMUN2111LT1

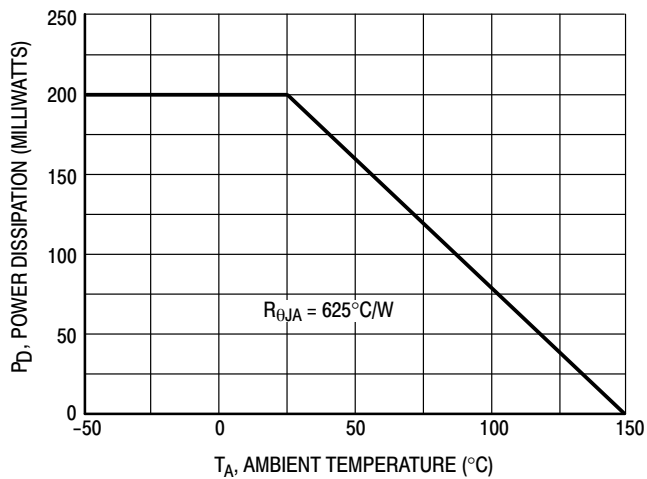


Figure 1. Derating Curve

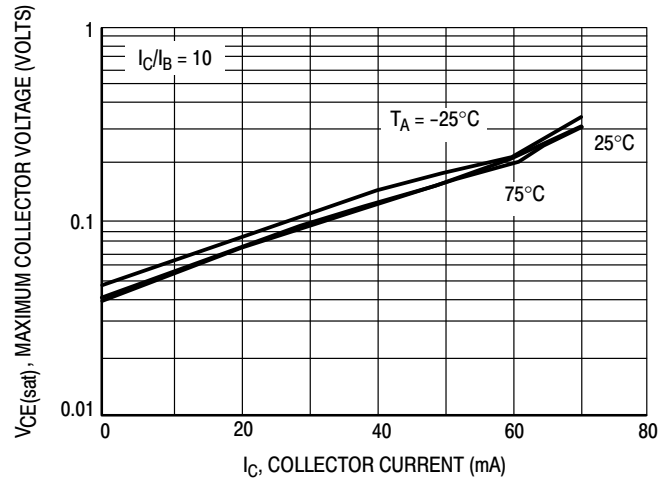


Figure 2. $V_{CE(sat)}$ versus I_C

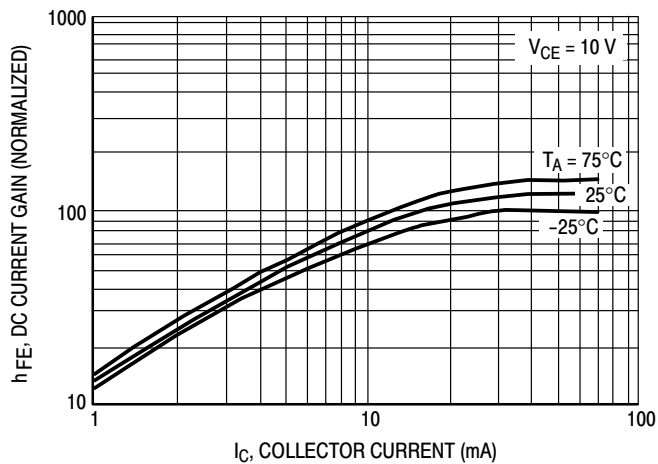


Figure 3. DC Current Gain

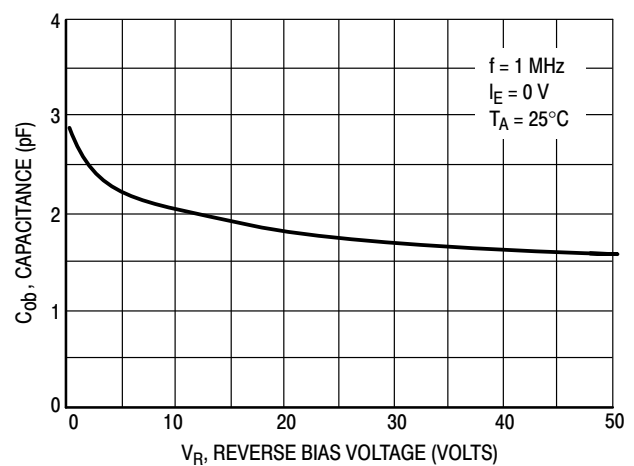


Figure 4. Output Capacitance

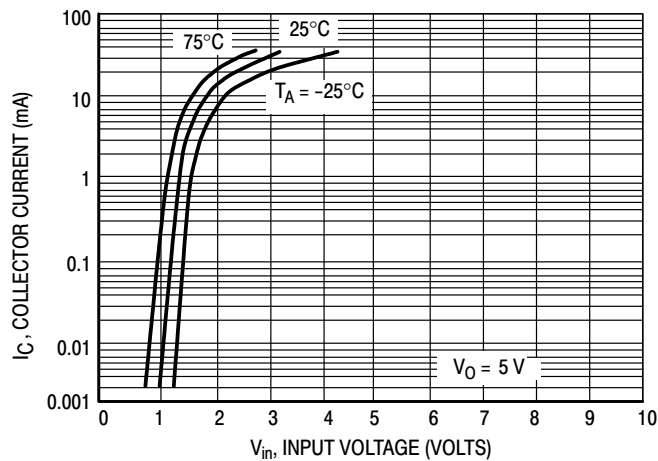


Figure 5. Output Current versus Input Voltage

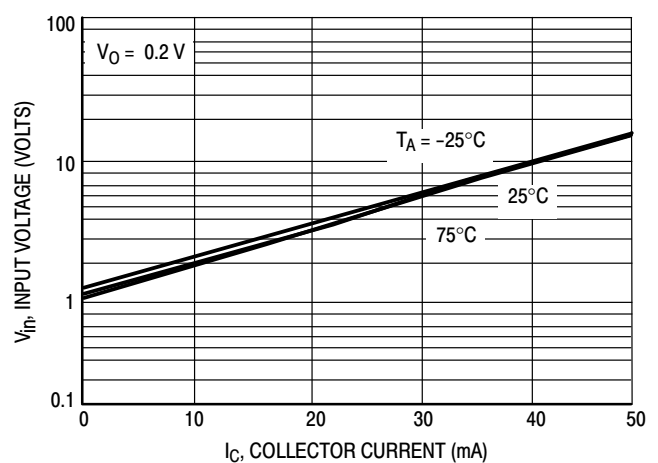


Figure 6. Input Voltage versus Output Current

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2112LT1

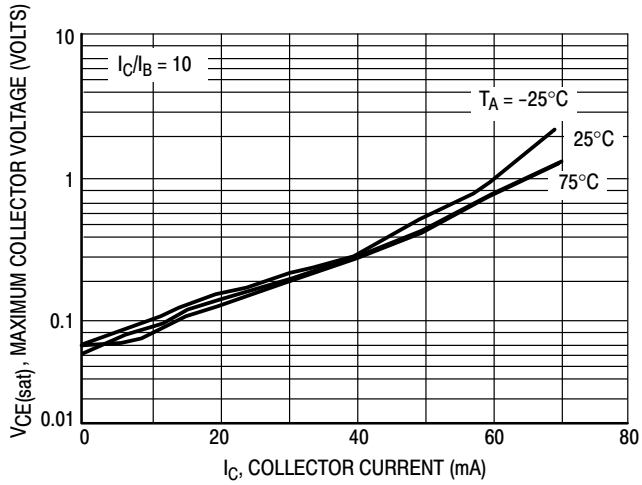


Figure 7. $V_{CE(sat)}$ versus I_C

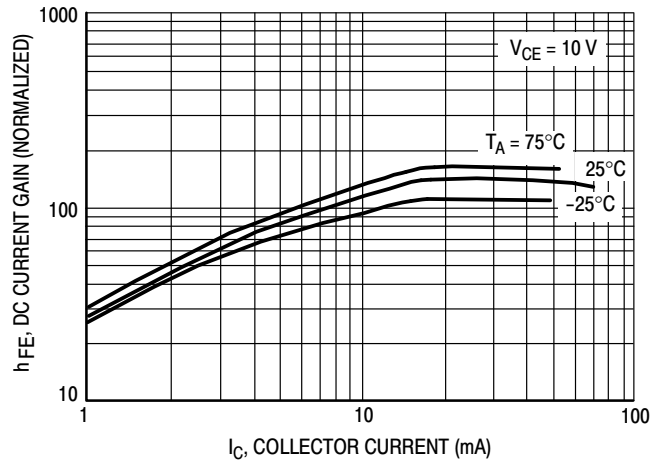


Figure 8. DC Current Gain

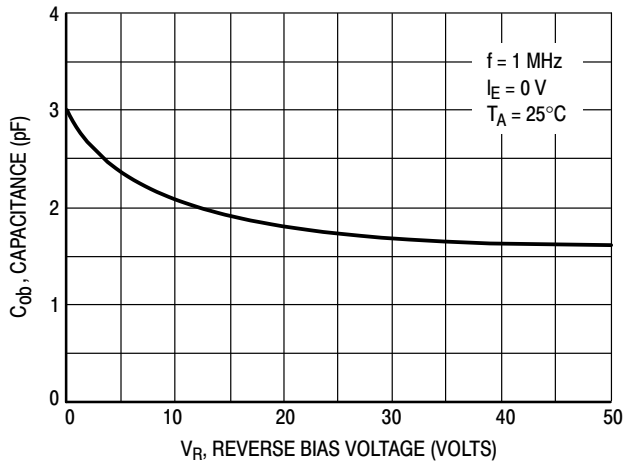


Figure 9. Output Capacitance

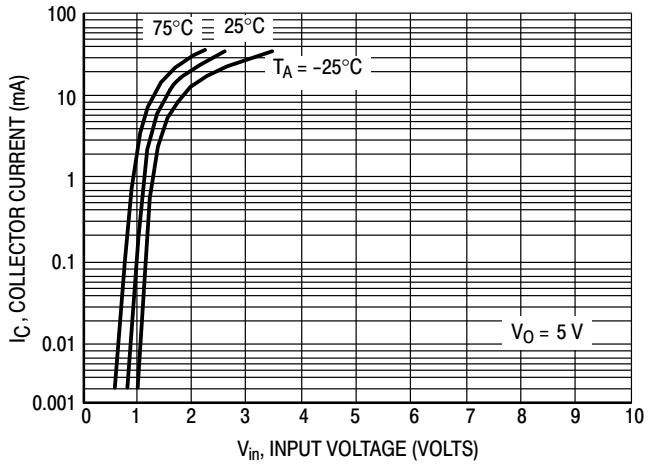


Figure 10. Output Current versus Input Voltage

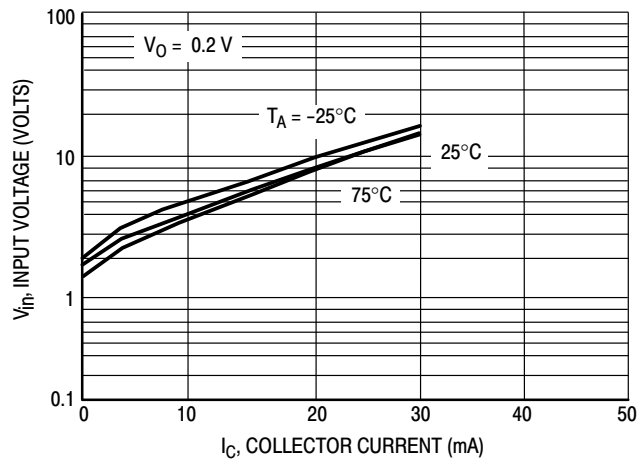


Figure 11. Input Voltage versus Output Current

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2113LT1, SMMUN2113LT1

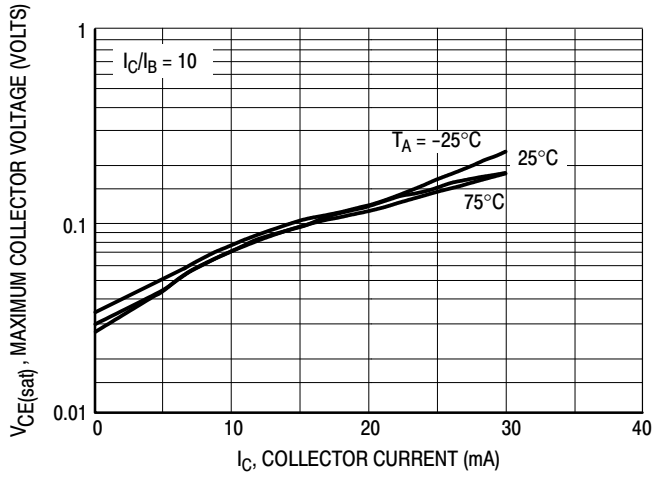


Figure 12. $V_{CE(sat)}$ versus I_C

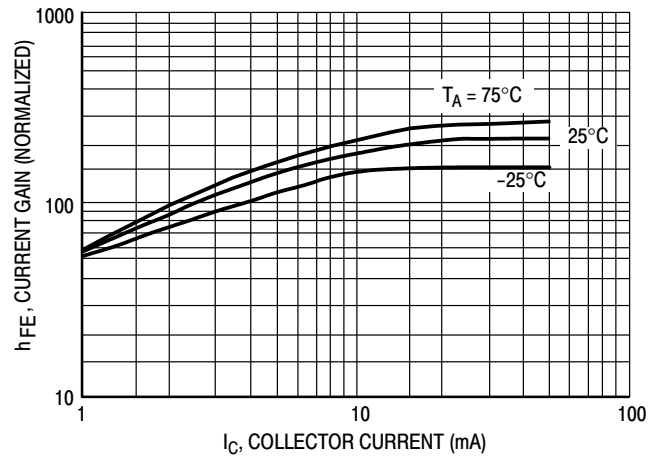


Figure 13. DC Current Gain

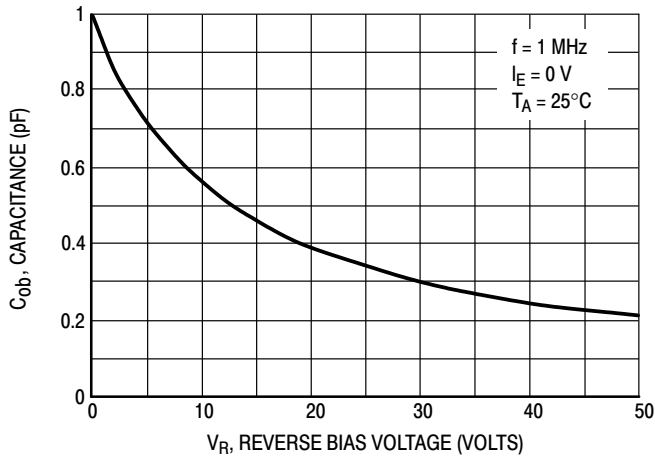


Figure 14. Output Capacitance

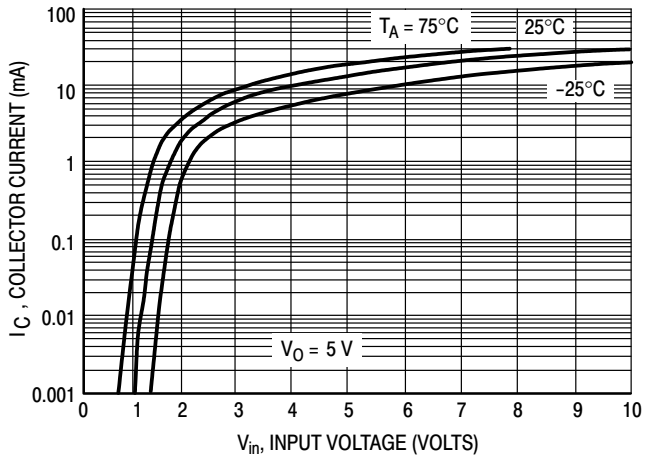


Figure 15. Output Current versus Input Voltage

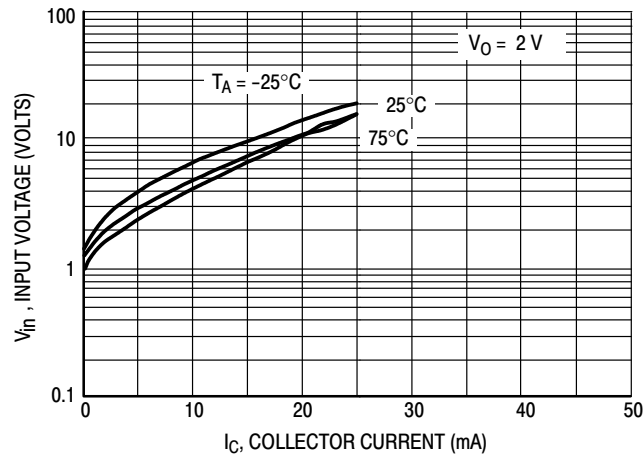


Figure 16. Input Voltage versus Output Current

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2114LT1, SMMUN2114LT1

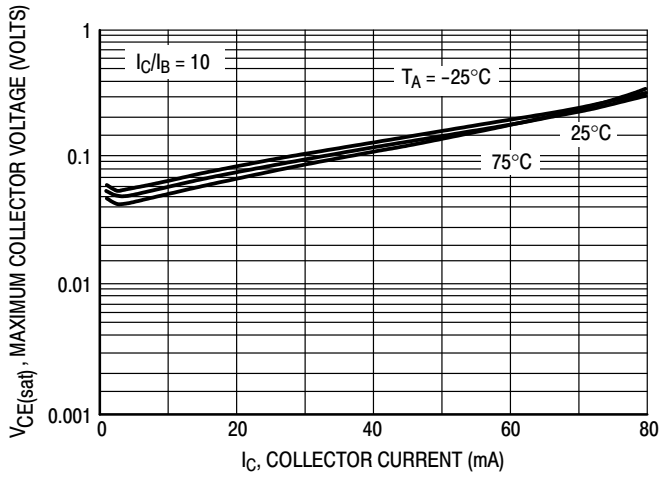


Figure 17. $V_{CE(sat)}$ versus I_C

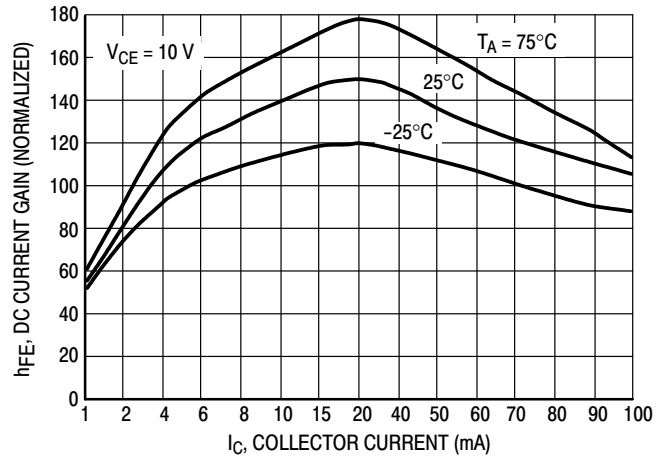


Figure 18. DC Current Gain

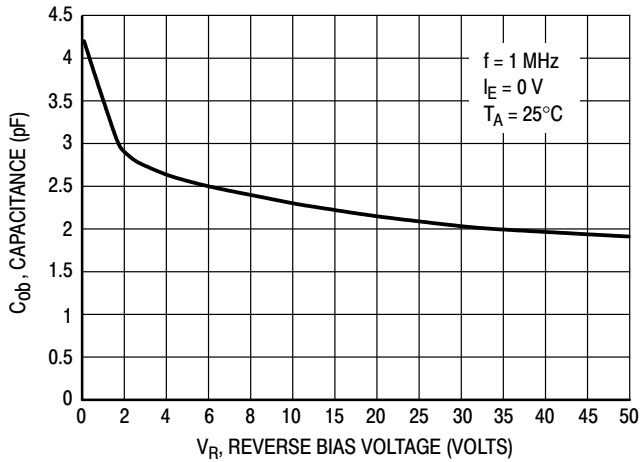


Figure 19. Output Capacitance

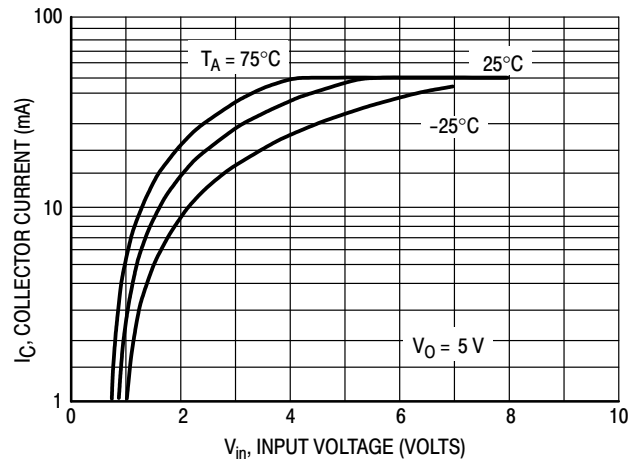


Figure 20. Output Current versus Input Voltage

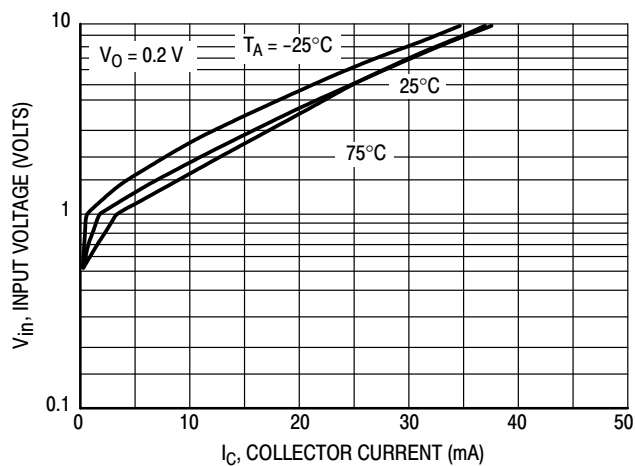


Figure 21. Input Voltage versus Output Current

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2115LT1

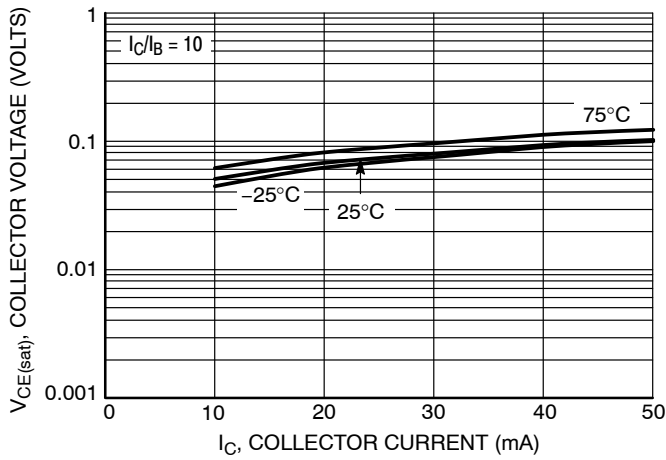


Figure 22. $V_{CE(sat)}$ versus I_C

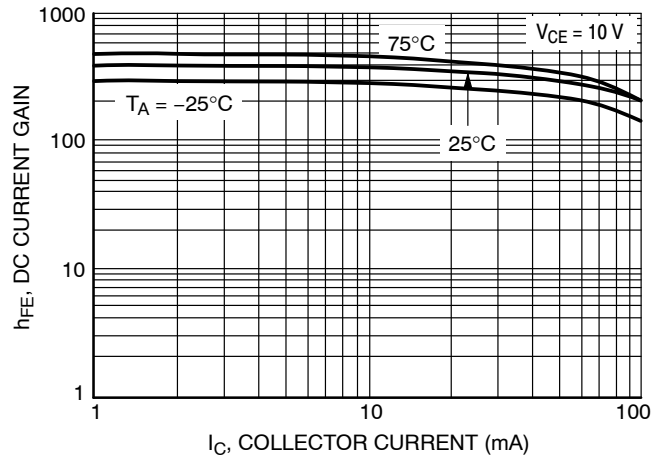


Figure 23. DC Current Gain

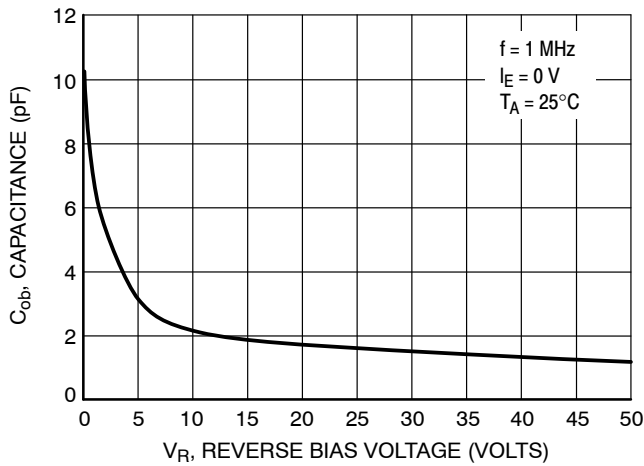


Figure 24. Output Capacitance

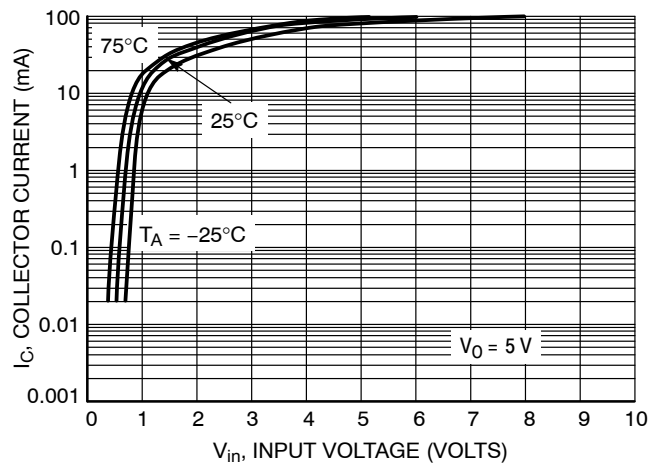


Figure 25. Output Current versus Input Voltage

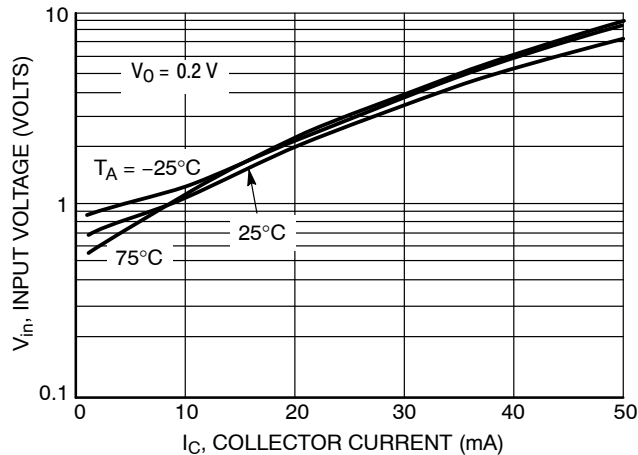


Figure 26. Input Voltage versus Output Current

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2116LT1, SMMUN2116LT1

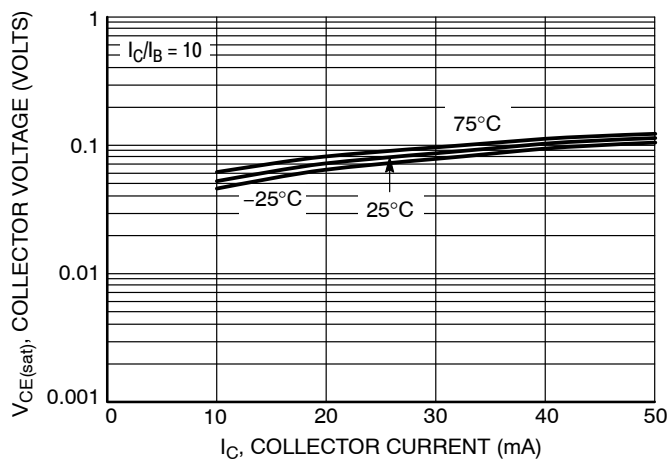


Figure 27. $V_{CE(sat)}$ versus I_C

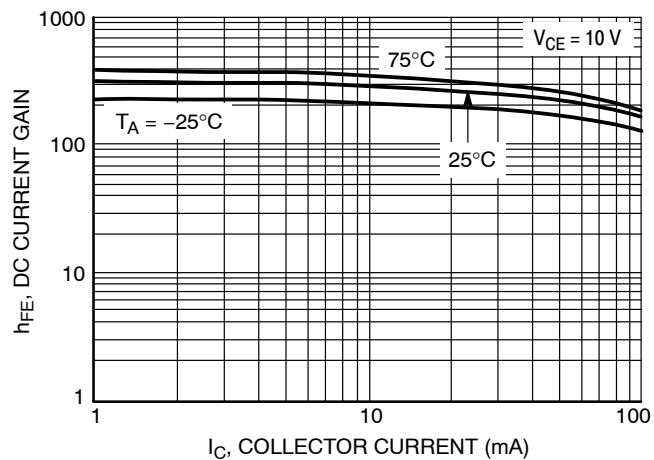


Figure 28. DC Current Gain

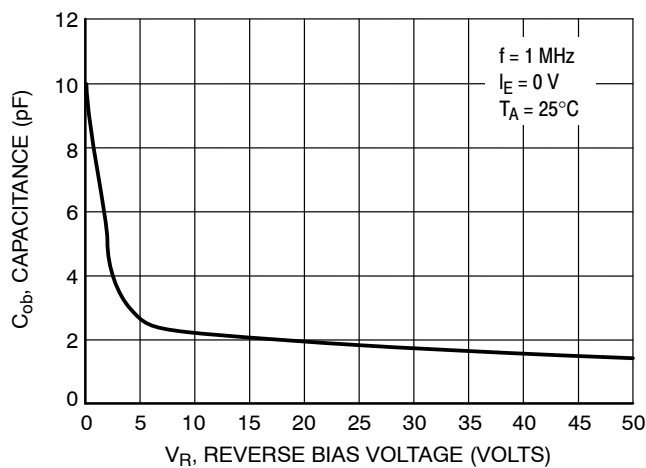


Figure 29. Output Capacitance

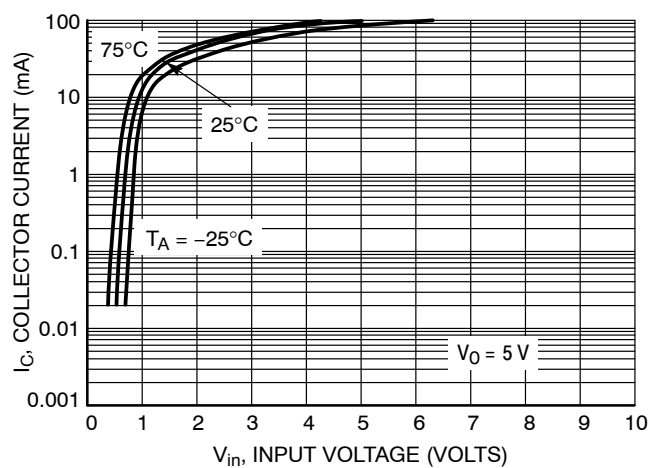


Figure 30. Output Current versus Input Voltage

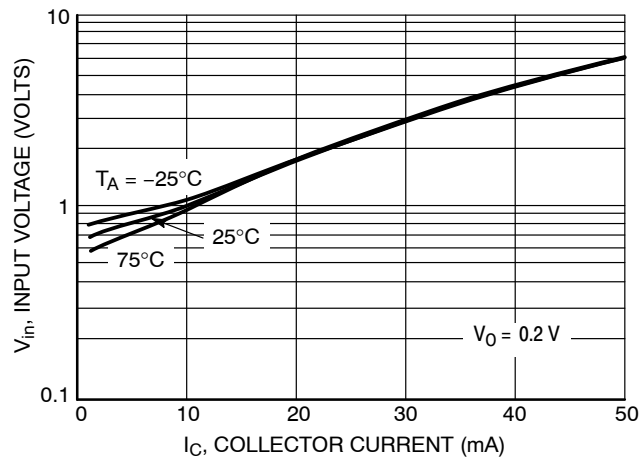


Figure 31. Input Voltage versus Output Current

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2132LT1, NSVMMUN2132LT1

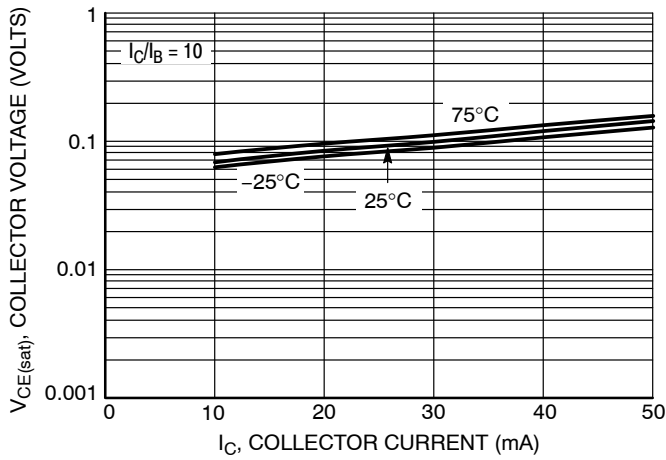


Figure 32. $V_{CE(sat)}$ versus I_C

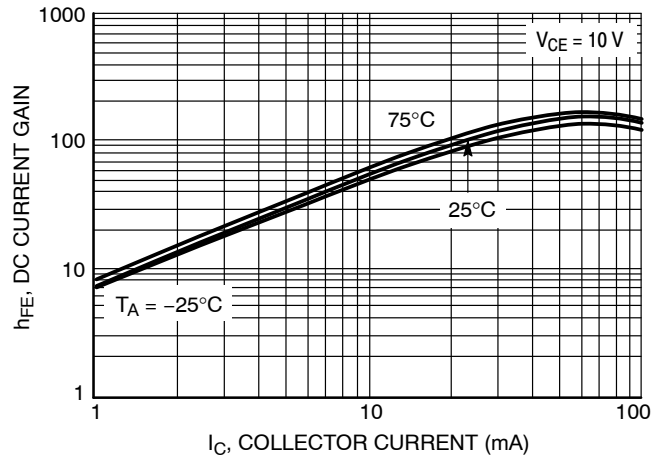


Figure 33. DC Current Gain

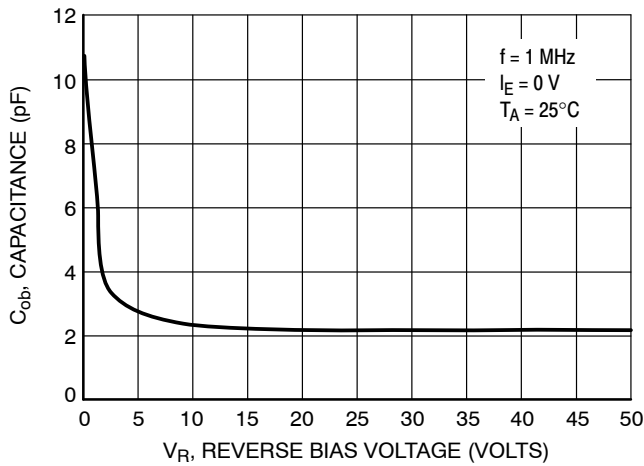


Figure 34. Output Capacitance

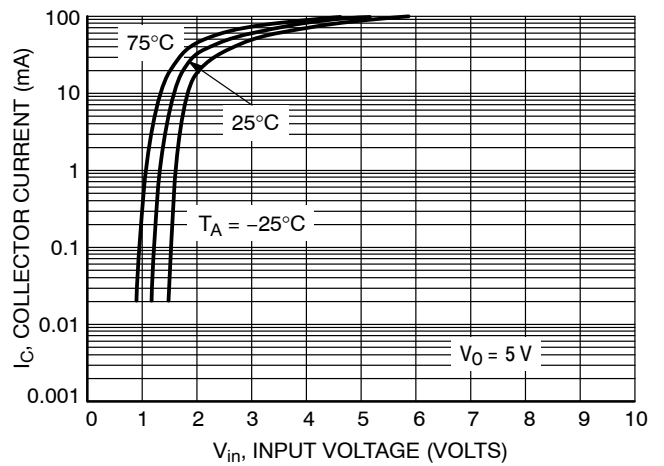


Figure 35. Output Current versus Input Voltage

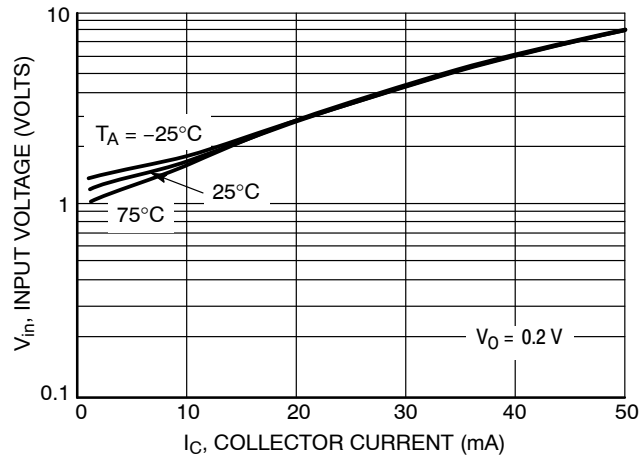


Figure 36. Input Voltage versus Output Current

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2133LT1

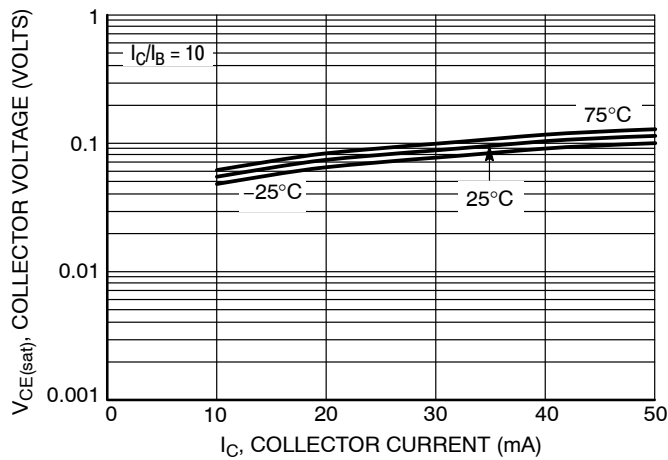


Figure 37. $V_{CE(sat)}$ versus I_C

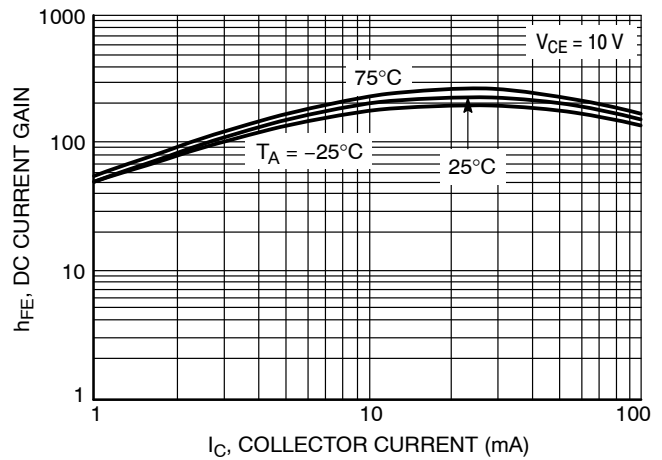


Figure 38. DC Current Gain

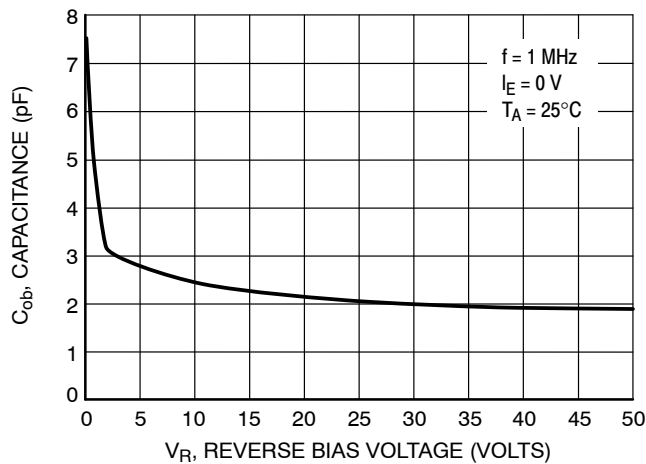


Figure 39. Output Capacitance

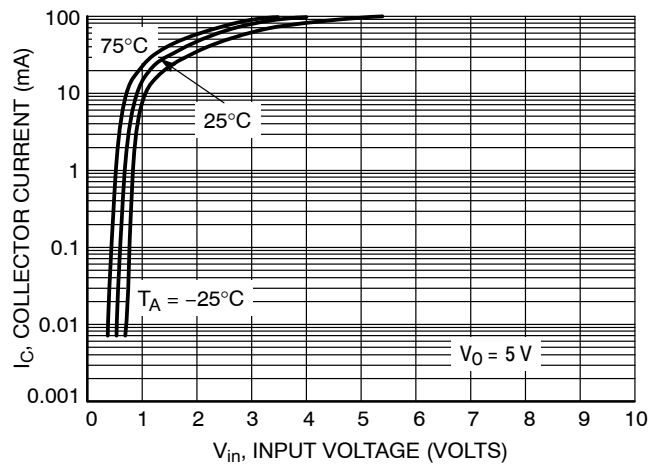


Figure 40. Output Current versus Input Voltage

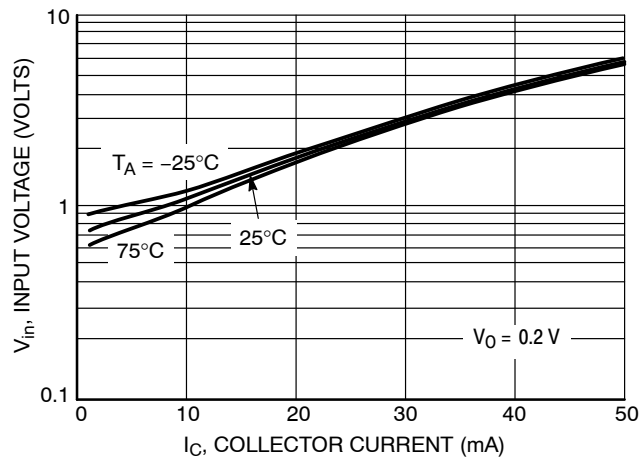


Figure 41. Input Voltage versus Output Current

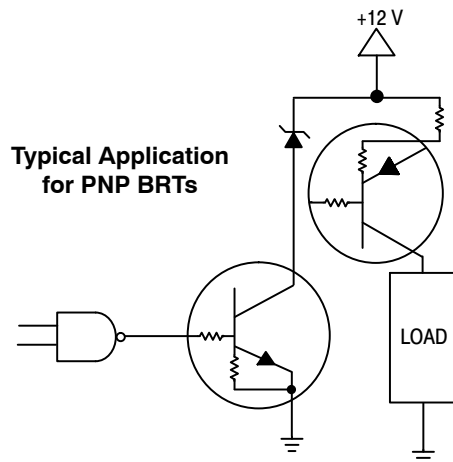


Figure 42. Inexpensive, Unregulated Current Source


MMUN2111LT1G, SMMUN2111LT1G, NSVMMUN2111LT1G Series

PACKAGE DIMENSIONS

SOT-23 (TO-236)

CASE 318-08

ISSUE AP

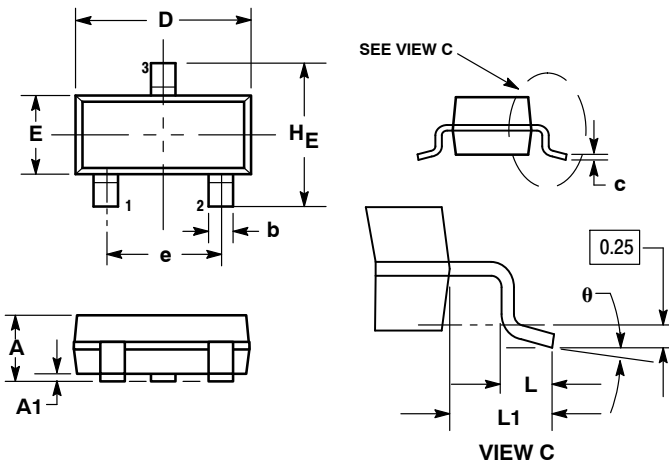

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.89	1.00	1.11	0.035	0.040	0.044
A1	0.01	0.06	0.10	0.001	0.002	0.004
b	0.37	0.44	0.50	0.015	0.018	0.020
c	0.09	0.13	0.18	0.003	0.005	0.007
D	2.80	2.90	3.04	0.110	0.114	0.120
E	1.20	1.30	1.40	0.047	0.051	0.055
e	1.78	1.90	2.04	0.070	0.075	0.081
L	0.10	0.20	0.30	0.004	0.008	0.012
L1	0.35	0.54	0.69	0.014	0.021	0.029
HE	2.10	2.40	2.64	0.083	0.094	0.104
θ	0°	---	10°	0°	---	10°

STYLE 6:

1. BASE
2. EMITTER
3. COLLECTOR

SOLDERING FOOTPRINT

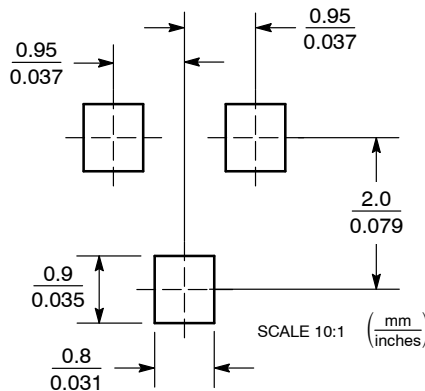

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local
Sales Representative

MMUN2111LT1/D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ON Semiconductor:

[MMUN2111LT1G](#) [MMUN2111LT3G](#) [MMUN2112LT1G](#) [MMUN2113LT1G](#) [MMUN2114LT1G](#) [MMUN2115LT1G](#)
[MMUN2116LT1G](#) [MMUN2132LT1G](#) [MMUN2133LT1G](#) [MMUN2113LT3G](#) [NSVMMUN2132LT1G](#) [SMMUN2113LT1G](#)
[MMUN2114LT3G](#)