
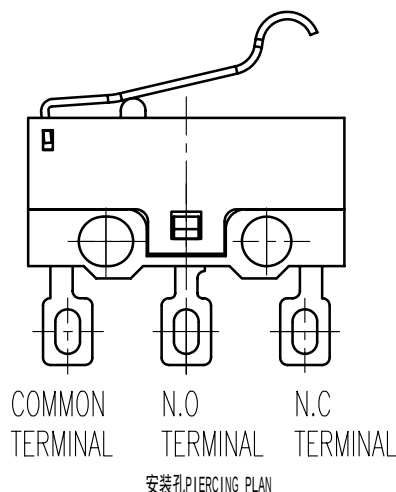
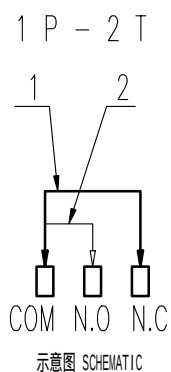


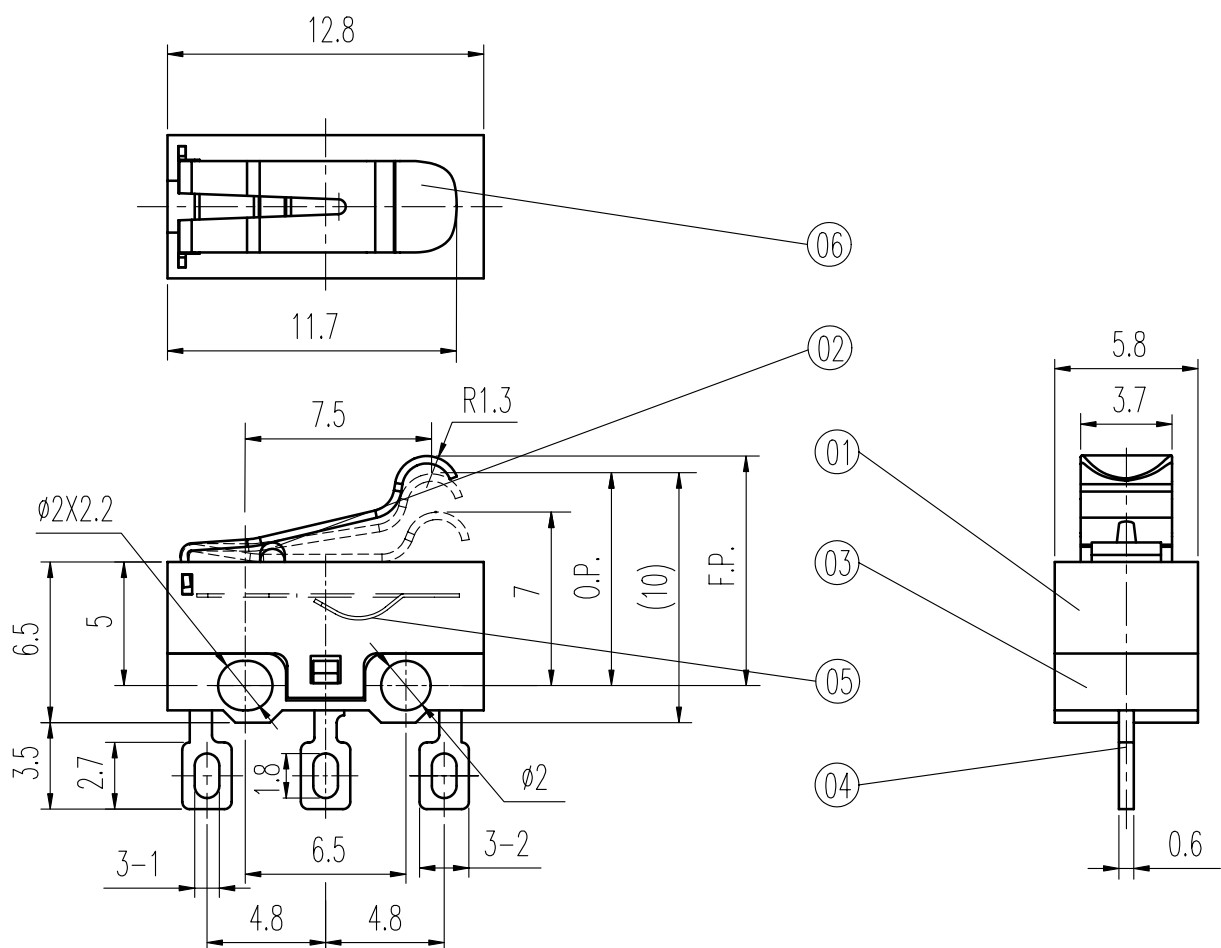

规格 Specifications

额定负荷 Ratings	DC 30 V 0.1 A
初期接触电阻 Initial Contact Resistance	50 mΩ Max.
绝缘电阻 Insulation Resistance	DC 500 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric Voltage	AC 1000 V (50~60HZ) 60 Sec.
操作力 Operating Force (O.F.)	25±15 gf
回复力 Releasing Force (R.F.)	5 gf Min.
自由位置 Free Position (F.P.)	9.50 mm Max.
动作位置 Operating Position (O.P.)	8.50±0.80 mm
过行程 Over Travel (O.T.)	0.50 mm Min.
差程 Movement Differential Travel (D.T.)	0.50 mm Max.
机械寿命 Operating Life Without Load	500,000 Cycles
负荷寿命 Operating Life With Load	50,000 Cycles

06	杠杆 LEVER	SUS	1	NATURAL				
05	弹片 SPRING PLATE	C1720	1	Ag PLATED				
04	端子 TERMINAL	C2680R	3	Ag PLATED				
03	胶壳 HOUSING	PBT	1	BLACK C				
02	胶柄 KNOB	PBT	1	RED				
01	胶盖 COVER	PBT	1	BLACK C	标号REV	内容 DESCRIPTION	签名SIGN.	日期DATE
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	DWG NO. ITEM3109			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	MICRO SWITCH		ITEM NO	MS-118405-H		
UNDER 1	± 0.10	DRAWN	张渠江	2009-12-2	VERSION	A01	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	王光云	2009-12-2	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	马建和	2009-12-2	PROJECTION			

COMAX

高铭电子(惠州)有限公司
Comax Electronics(Huizhou)Co.,Ltd.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[C&K Components:](#)

[MS-118405-H](#)