




P.C. MOUNTING

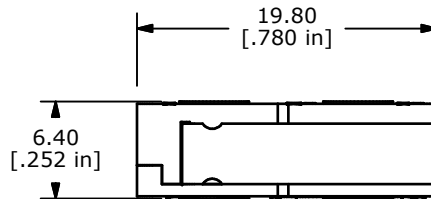

ISOMETRIC

O.P. (MM)	P.T. (MM)
9.1 ±0.8	2.8 MAX



O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



CURCUIT: SPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH] Ø2.50
2. GENERAL TOLERANCE: X.X=± 0.4 [.098 in]
- X.XX=± 0.25
3. RATING: 0.4VA @20VAC OR DC 1.
- ▲ 4. OPERATING FORCE: 070 ± 25 GRAMS [.07
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP. [
8. INSULATION RESISTANCE: 100 MEGA-OHMS
9. DIELECTRIC STRENGTH: 1000VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 MILLI-OHMS MAX.
- ▲ 11. CONTACTS: 10 MICRO INCHES MINIMUM GOLD PLATING (PN: Q990001)
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT

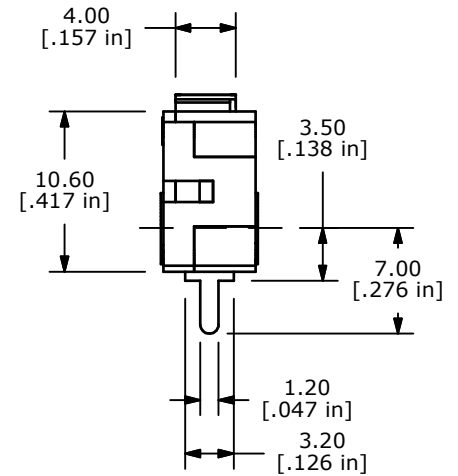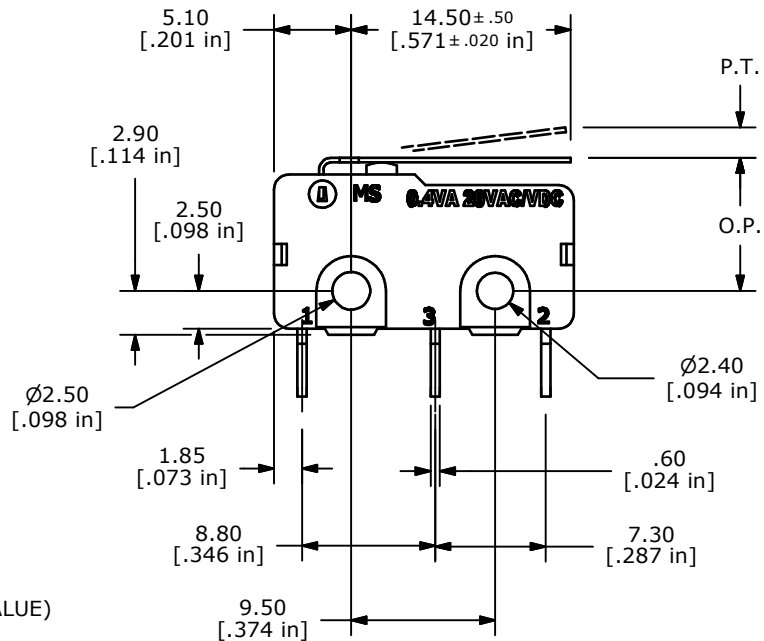

A	18579	Released For Production	7/2/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE MS085R101F070P1A				
SCALE 2:1	DATE 7/2/2009	DR BLR	DWG Q970100	REV A