


TRANSILLUMINATED RE SERIES

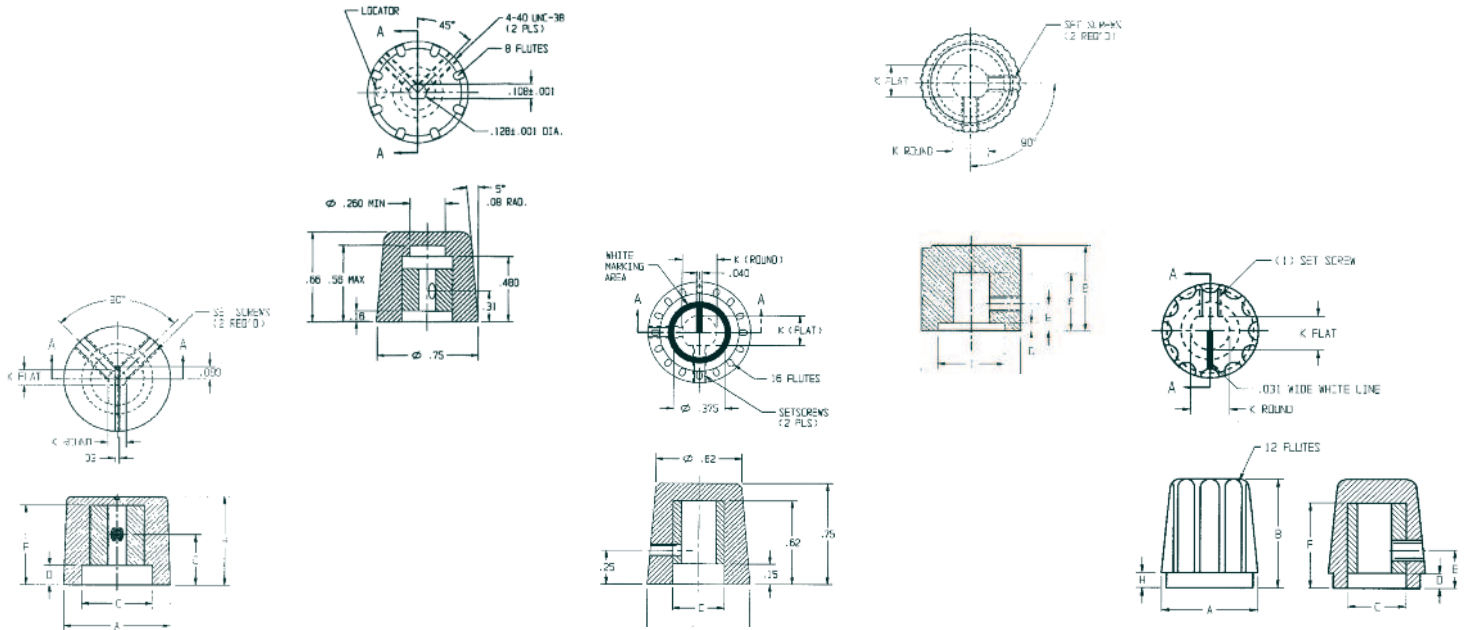

RE SERIES

Style Number	A Base Diameter	B Height	C Nut Clearance Diameter		D Nut Clearance Depth	E Set Screw	F Shaft Hole Height	H Depth	N Number of Flutes	Set Screws	
			1/8	1/4						1/8	1/4
1836	0.75	0.63	0.38	0.38	0.00	0.19	0.46	0.16	20	MS51021-102	MS51021-132
2400	0.75	0.66	0.26	0.38	0.16	0.31	0.56	0.09	8	MS51021-103	MS51021-132
456	0.75	0.75	0.38	0.38	0.16	0.19	0.46	0.16	16	MS51021-103	MS51021-132
8509	0.88	0.75	0.38	0.38	0.16	0.31	0.62	0.12	12	MS51021-102	MS51021-132
2410	0.88	0.78	0.38	0.38	0.16	0.31	0.68	0.16	12	MS51021-103	MS51021-133
2565	1.00	0.84	—	0.66	0.12	0.25	0.56	0.09	12	MS51021-133	MS51021-133
2420	1.00	0.88	0.38	0.38	0.16	0.31	0.48	0.12	12	MS51021-103	MS51021-134
8510	1.12	0.75	0.38	0.38	0.16	0.31	0.62	0.12	12	MS51021-102	MS51021-132

Design Variations

- Set screw locations can vary
- Markings and color can vary (see page 4T)
- Nut clearance depth and diameter can vary
- See part number system for shaft hole designation

Detailed drawings are available for each style

All of our backlighted knobs can be manufactured for night vision use. Our night vision knobs meet NVIS "Green A" requirements.

