







## MS5837-02BA01

Ultra-Small Gel Filled Pressure Sensor

### **SPECIFICATIONS**

- Ceramic metal package, 3.3 x 3.3 x 2.75mm
- High-resolution module, 13 cm
- Supply voltage: 1.5 to 3.6 V
- Fast conversion down to 0.5 ms
- Low power, 0.6 μA (standby ≤ 0.1 μA at 25°C)
- Integrated digital pressure sensor (24 bit  $\Delta\Sigma$  ADC)
- Operating range: 300 to 1200 mbar, -20 to +85 °C
- I<sup>2</sup>C interface
- No external components (internal oscillator)
- Sealing designed for 1.8 x 0.8mm O-ring

The MS5837 is an ultra-compact micro altimeter. It is optimized for altimeter and barometer applications. The altitude resolution at sea level is 13 cm of air.

The sensor module includes a high-linearity pressure sensor and an ultra-low power 24 bit  $\Delta\Sigma$  ADC with internal factory-calibrated coefficients. It provides a precise digital 24-bit pressure and temperature value and different operation modes that allow the user to optimize for conversion speed and current consumption. A high-resolution temperature output allows the implementation of an altimeter/thermometer function without any additional sensor. The MS5837 can be interfaced to any microcontroller with I²C-bus interface. The communication protocol is simple, without the need of programming internal registers in the device. This new sensor module generation is based on leading MEMS technology and latest benefits from MEAS Switzerland proven experience and know-how in high volume manufacturing of altimeter modules, which has been widely used for over a decade.

1

#### **FIELD OF APPLICATION**

Fitness trackers

Mobile altimeter / barometer systems
Bike computers
Personal navigation devices

## PERFORMANCE SPECIFICATIONS

## **ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Conditions	Min.	Тур.	Max	Unit
Supply voltage	$V_{DD}$		-0.3		+3.6	V
Storage temperature	Ts		-40		+85	°C
Overpressure	P <sub>max</sub>				10	bar
Maximum Soldering Temperature	T <sub>max</sub>	40 sec. max			250	°C
ESD rating		Human Body Model	-2		+2	kV
Latch up		JEDEC JESD78 standard	-100		+100	mA

## **ELECTRICAL CHARACTERISTICS**

Parameter	Symbol	Condition	ns	Min.	Тур.	Max	Unit
Operating Supply voltage	$V_{DD}$			1.5	3.0	3.6	V
Operating Temperature	Т			-20	+25	+85	°C
			8192		20.09		
			4096		10.05		
Supply current	Ipp	OSR	2048		5.02		
(1 sample per sec.)	מטו	USh	1024		2.51		μΑ
			512		1.26		
			256		0.63		
Peak supply current		during co	nversion		1.25		mA
Standby supply surrent		at 25°C			0.01	0.1	
Standby supply current		$(V_{DD} = 3.0)$	) V)		0.01	0.1	μΑ
VDD Capacitor		from VDD	to GND	100	470		nF

## **ANALOG DIGITAL CONVERTER (ADC)**

Parameter	Symbol	Condition	ns	Min.	Тур.	Max	Unit
Output Word					24		bit
			8192		16.44	17.2	
			4096		8.22	8.61	
ADC Conversion times (1)		OCD	2048		4.13	4.32	
ADC Conversion time (1)	tc	OSR	1024		2.08	2.17	ms
			512		1.06	1.10	
			256		0.54	0.56	

<sup>(1)</sup> Maximum values must be applied to determine waiting times in I2C communication

## PERFORMANCE SPECIFICATIONS

## PRESSURE OUTPUT CHARACTERISTICS (V<sub>DD</sub> = 3.0 V, T = 25 °C, UNLESS OTHERWISE NOTED)

Parameter	Conditio	าร	Min.	Тур.	Max	Unit
Operating Pressure Range	Prange		300		1200	mbar
Extended Pressure Range	P <sub>ext</sub>	Linear Range of ADC	10		2000	mbar
Relative Accuracy	300110	0 mbar, at 20°C 0 mbar, 060°C (2) 0 mbar, -2085°C (2)	-0.5 -2 -4		+0.5 +2 +4	mbar
Resolution RMS	OSR	8192 4096 2048 1024 512 256		0.016 0.021 0.028 0.039 0.062 0.11		mbar
Maximum error with supply voltage	V <sub>DD</sub> = 1.5	V3.6 V		±2		mbar
Long-term stability				±2		mbar/yr
Reflow soldering impact		C J-STD-020C pplication note AN808)		±4		mbar

<sup>(2)</sup> Autozero at 850 mbar, ambient temperature

## TEMPERATURE OUTPUT CHARACTERISTICS ( $V_{DD}$ = 3.0 V, T = 25 °C, UNLESS OTHERWISE NOTED)

Parameter	Condition	าร	Min.	Тур.	Max	Unit
Relative Accuracy	-2085°C	C, 3001100 mbar	-2		+2	°C
Maximum error with supply voltage	V <sub>DD</sub> = 1.5	V3.6 V		±0.3		°C
Resolution RMS	OSR	8192 4096 2048 1024 512 256		0.002 0.003 0.004 0.006 0.009 0.012		°C

## **DIGITAL INPUTS (SDA, SCL)**


Parameter	Symbol	Conditions	Min.	Тур.	Max	Unit
Serial data clock	SCL				400	kHz
Input high voltage	V <sub>IH</sub>		80% V <sub>DD</sub>		100% V <sub>DD</sub>	V
Input low voltage	VIL		0% V <sub>DD</sub>		20% V <sub>DD</sub>	V
Input leakage current	I <sub>leak</sub>	T = 25 °C			0.1	μΑ


## **DIGITAL OUTPUTS (SDA)**


Parameter	Symbol	Conditions	Min.	Тур.	Max	Unit
Output high voltage	Vон	I <sub>source</sub> = 1 mA	80% V <sub>DD</sub>		100% V <sub>DD</sub>	V
Output low voltage	V <sub>OL</sub>	I <sub>sink</sub> = 1 mA	$0\% V_{DD}$		$20\% V_{DD}$	V

## TYPICAL PERFORMANCE CHARACTERISTICS

# RELATIVE PRESSURE ERROR AND TEMPERATURE ERROR VS PRESSURE AND TEMPERATURE (TYPICAL VALUES)










## TYPICAL PERFORMANCE CHARACTERISTICS


## RELATIVE PRESSURE AND TEMPERATURE ERROR VS TEMPERATURE (1<sup>ST</sup> ORDER AND 2<sup>ND</sup> ORDER ALGORITHM, TYPICAL VALUES)

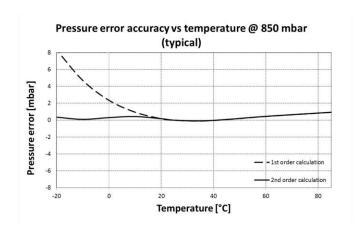



# RELATIVE PRESSURE AND TEMPERATURE ERROR VS POWER SUPPLY (TYPICAL VALUES)





## PRESSURE AND TEMPERATURE CALCULATION

#### **GENERAL**

The MS5837 consists of a piezo-resistive sensor and a sensor interface integrated circuit. The main function of the MS5837 is to convert the uncompensated analogue output voltage from the piezo-resistive pressure sensor to a 24-bit digital value, as well as providing a 24-bit digital value for the temperature of the sensor.

#### **FACTORY CALIBRATION**

Every module is individually factory calibrated at two temperatures and two pressures. As a result, 6 coefficients necessary to compensate for process variations and temperature variations are calculated and stored in the 112-bit PROM of each module. These bits (partitioned into 6 coefficients) must be read by the microcontroller software and used in the program converting D1 and D2 into compensated pressure and temperature values.


#### **COMMUNICATION INTERFACE**

The MS5837 has been built with I<sup>2</sup>C serial interface.

Module ref	Mode	Pins used
MS5837-02BA01	I <sup>2</sup> C	SDA, SCL

The external microcontroller clocks in the data through the input SCL (Serial CLock) and SDA (Serial DAta). The sensor responds on the same pin SDA which is bidirectional for the I<sup>2</sup>C bus interface. So this interface type uses only 2 signal lines and does not require a chip select.


## PRESSURE AND TEMPERATURE CALCULATION

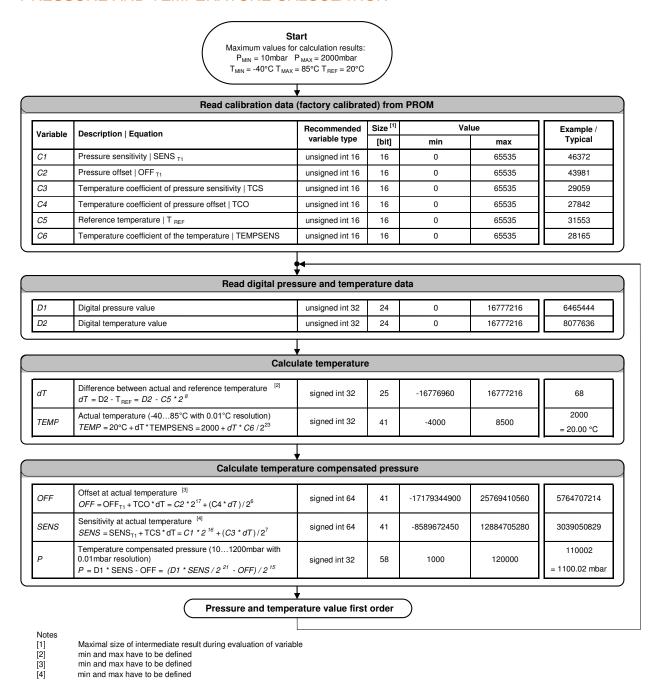

Flow chart for pressure and temperature reading and software compensation

## SECOND ORDER TEMPERATURE COMPENSATION

The results of the last first order calculation are entered in the following chart to obtain the pressure and temperature compensated with the 2<sup>nd</sup> order: P2 and TEMP2.

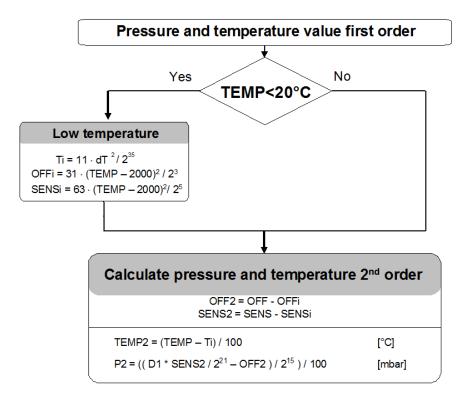

Flow chart for pressure and temperature to the optimum accuracy

## I<sup>2</sup>C INTERFACE

#### **COMMANDS**

The MS5837 has only five basic commands:

- 1. Reset
- 2. Read PROM (112 bit of calibration words)
- 3. D1 conversion
- 4. D2 conversion
- 5. Read ADC result (24 bit pressure / temperature)

Each  $I^2C$  communication message starts with the start condition and it is ended with the stop condition. The MS5837 address is 1110110x (write: x=0, read: x=1).

Size of each command is 1 byte (8 bits) as described in the table below. After ADC read commands, the device will return 24 bit result and after the PROM read 16 bit results. The address of the PROM is embedded inside of the PROM read command using the a2, a1 and a0 bits.


	Com	mand	byte						hex value
Bit number	0	1	2	3	4	5	6	7	
Bit name	PRO M	CO NV	-	Тур	Ad2/ Os2	Ad1/ Os1	Ad0/ Os0	Stop	
Command									
Reset	0	0	0	1	1	1	1	0	0x1E
Convert D1 (OSR=256)	0	1	0	0	0	0	0	0	0x40
Convert D1 (OSR=512)	0	1	0	0	0	0	1	0	0x42
Convert D1 (OSR=1024)	0	1	0	0	0	1	0	0	0x44
Convert D1 (OSR=2048)	0	1	0	0	0	1	1	0	0x46
Convert D1 (OSR=4096)	0	1	0	0	1	0	0	0	0x48
Convert D1 (OSR=8192)	0	1	0	0	1	0	1	0	0x4A
Convert D2 (OSR=256)	0	1	0	1	0	0	0	0	0x50
Convert D2 (OSR=512)	0	1	0	1	0	0	1	0	0x52
Convert D2 (OSR=1024)	0	1	0	1	0	1	0	0	0x54
Convert D2 (OSR=2048)	0	1	0	1	0	1	1	0	0x56
Convert D2 (OSR=4096)	0	1	0	1	1	0	0	0	0x58
Convert D2 (OSR=8192)	0	1	0	1	1	0	1	0	0x5A
ADC Read	0	0	0	0	0	0	0	0	0x00
PROM Read	1	0	1	0	Ad2	Ad1	Ad0	0	0xA0 to 0xAE

Command structure

#### **RESET SEQUENCE**

The Reset sequence shall be sent once after power-on to make sure that the calibration PROM gets loaded into the internal register. It can be also used to reset the device PROM from an unknown condition.


The reset can be sent at any time. In the event that there is not a successful power on reset this may be caused by the SDA being blocked by the module in the acknowledge state. The only way to get the MS5837 to function is to send several SCLs followed by a reset sequence or to repeat power on reset.



**I2C Reset Command** 

#### **PROM READ SEQUENCE**


The read command for PROM shall be executed once after reset by the user to read the content of the calibration PROM and to calculate the calibration coefficients. There are in total 7 addresses resulting in a total memory of 112 bit. Addresses contain factory data and the setup, calibration coefficients, the serial code and CRC. The command sequence is 8 bits long with a 16 bit result which is clocked with the MSB first. The PROM Read command consists of two parts. First command sets up the system into PROM read mode. The second part gets the data from the system.

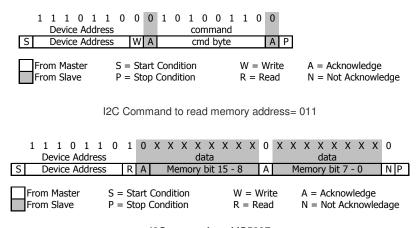

I2C answer from MS5837

#### **CONVERSION SEQUENCE**

The conversion command is used to initiate uncompensated pressure (D1) or uncompensated temperature (D2) conversion. After the conversion, using ADC read command the result is clocked out with the MSB first. If the conversion is not executed before the ADC read command, or the ADC read command is repeated, it will give 0 as the output result. If the ADC read command is sent during conversion the result will be 0, the conversion will not stop and the final result will be wrong. Conversion sequence sent during the already started conversion process will yield incorrect result as well. A conversion can be started by sending the command to MS5837. When command is sent to the system it stays busy until conversion is done. When conversion is finished the data can be accessed by sending a Read command, when an acknowledge is sent from the MS5837, 24 SCL cycles may be sent to receive all result bits. Every 8 bits the system waits for an acknowledge signal.

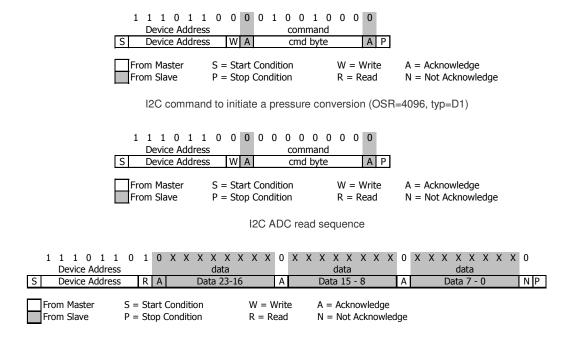

I2C answer from MS5837

## CYCLIC REDUNDANCY CHECK (CRC)

MS5837 contains a PROM memory with 112-Bit. A 4-bit CRC has been implemented to check the data validity in memory.

A d d	D B 1 5	D B 1 4	D B 1 3	D B 1 2	D B 1	D B 1 0	D B 9	D B 8	D B 7	D B 6	D B 5	D B 4	D B 3	D B 2	D B 1	D B 0
0		CF	RC		Factory defined											
1								С	1							
2									2							
3								С	3							
4								С								
5								С	5							
6								С	6							

Memory PROM mapping


## C Code example for CRC-4 calculation:

```
unsigned char crc4(unsigned int n_prom[])
                                                                     // n_prom defined as 8x unsigned int (n_prom[8])
int cnt;
                                                                      // simple counter
unsigned int n_rem=0;
                                                                      // crc remainder
unsigned char n_bit;
          n_prom[0]=((n_prom[0]) & 0x0FFF);
                                                                     // CRC byte is replaced by 0
                                                                      // Subsidiary value, set to 0
          n_prom[7]=0;
          for (cnt = 0; cnt < 16; cnt++)
                                                                      // operation is performed on bytes
                                                                      // choose LSB or MSB
                    if (cnt%2==1)
                                       n_rem ^= (unsigned short) ((n_prom[cnt>>1]) & 0x00FF);
                                        n_rem ^= (unsigned short) (n_prom[cnt>>1]>>8);
                    else
                    for (n_bit = 8; n_bit > 0; n_bit--)
                              {
                              if (n rem & (0x8000))
                                                            n rem = (n rem << 1) ^0 x3000;
                              else
                                                            n_{rem} = (n_{rem} << 1);
                              }
          n_rem = ((n_rem >> 12) \& 0x000F);
                                                                     // final 4-bit remainder is CRC code
          return (n_rem ^ 0x00);
}
```

## **APPLICATION CIRCUIT**

The MS5837 is a circuit that can be used in conjunction with a microcontroller in mobile altimeter applications.


## I<sup>2</sup>C protocol communication

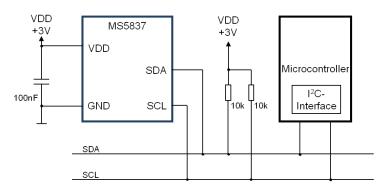

Typical application circuit

## PIN CONFIGURATION AND DEVICE PACKAGE OUTLINE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. GENERAL TOLERANCE  $\pm\,0.1$ 

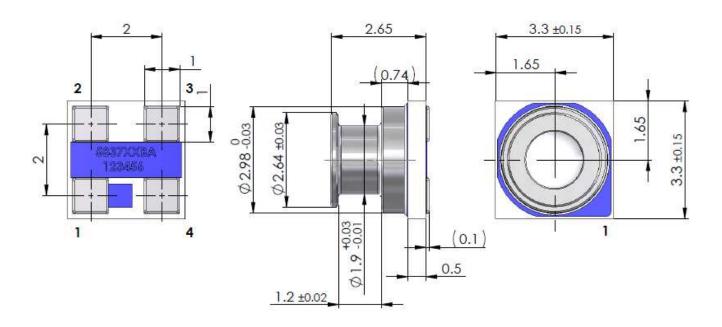


1	GND	GROUND
2	VDD	POSITIVE SUPPLY
3	SCL	I2C CLOCK
4	SDA	I2C DATA

Pin configuration and package outlines


## RECOMMENDED PAD LAYOUT

Pad layout for bottom side of the MS5837 soldered onto printed circuit board.



Recommended PCB footprint

## SHIPPING PACKAGE

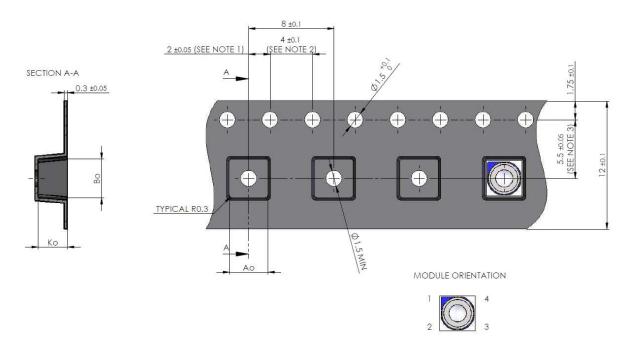

Ao	3.6±0.1
Во	3.6±0.1
Ко	2.75±0.1

#### NOTE:

- 1: Measured from centerline of sprocket hole to centerline of pocket 2: Cumulative tolerance of 10 sprocket holes is ±0.2mm 3: Measured from centerline of sprocket hole to centerline of pocket

#### MOUNTING AND ASSEMBLY CONSIDERATIONS

#### **SOLDERING**

Please refer to the application note AN808 available on our website for soldering recommendations.

#### MOUNTING

The MS5837 can be placed with automatic Pick & Place equipment using vacuum nozzles. It will not be damaged by the vacuum. Due to the low stress assembly the sensor does not show pressure hysteresis effects. It is important to solder all contact pads.

#### **CONNECTION TO PCB**

The package outline of the module allows the use of a flexible PCB for interconnection. This can be important for applications in watches and other special devices.

#### **SEALING WITH O-RINGS**

In applications such as outdoor watches the electronics must be protected against direct water or humidity. For such applications the MS5837 provides the possibility to seal with an O-ring. The O-ring shall be placed at the groove location, i.e. the small outer diameter of the metal lid. The following O-ring / housing dimensions are recommended:

O-ring inner diameter	1.8 ± 0.05 mm
O-ring cross-section diameter	0.8 ± 0.03 mm
Housing bore diameter	3.07 ± 0.03 mm

Please refer to the application note AN523 available on our website for O-ring mounting recommendations.

### **CLEANING**

The MS5837 has been manufactured under clean-room conditions. It is therefore recommended to assemble the sensor under class 10'000 or better conditions. Should this not be possible, it is recommended to protect the sensor opening during assembly from entering particles and dust. To avoid cleaning of the PCB, solder paste of type "noclean" shall be used. Warning: cleaning might damage the sensor.

#### **ESD PRECAUTIONS**

The electrical contact pads are protected against ESD. It is therefore essential to ground machines and personnel properly during assembly and handling of the device. The MS5837 is shipped in antistatic transport boxes. Any test adapters or production transport boxes used during the assembly of the sensor shall be of an equivalent antistatic material.

#### **DECOUPLING CAPACITOR**

Particular care must be taken when connecting the device to the power supply. A 100nF minimum ceramic capacitor must be placed as close as possible to the MS5837 VDD pin. This capacitor will stabilize the power supply during data conversion and thus, provide the highest possible accuracy.

## ORDERING INFORMATION

Part Number / Art. Number	Product	Delivery Form
MS583702BA01-50	MS5837-02BA01 Ultra Small Gel Filled Pressure Sensor	Tape and Reel, (2500 parts per Reel)

#### **NORTH AMERICA**

Measurement Specialties, Inc., a TE Connectivity company 45738 Northport Loop West Fremont, CA 94538 Tel: +1 800 767 1888 Fax: +1 510 498 1578 customercare.frmt@te.com

#### EUROPE

MEAS Switzerland Sarl, a TE Connectivity company Ch. Chapons-des-Prés 11 CH-2022 Bevaix Tel: +41 32 847 9550 Fax: +41 32 847 9569 customercare.bevx@te.com

#### ASIA

Measurement Specialties (China) Ltd., a TE Connectivity company No. 26 Langshan Road Shenzhen High-Tech Park (North) Nanshan District, Shenzhen, 518057 China

Tel: +86 755 3330 5088 Fax: +86 755 3330 5099 customercare.shzn@te.com

#### TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

CDOC-DA-0012

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: MS583702BA01-50