
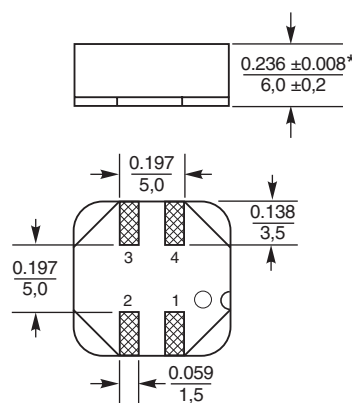


**HIGH TEMPERATURE**



# Shielded Coupled Inductors MSD1260T

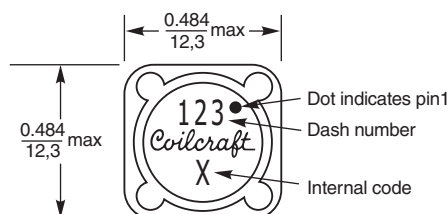

\* For optional tin-lead and tin-silver-copper terminations, dimensions are for the mounted part. Dimensions before mounting can be an additional 0.012 inch (0.3 mm).

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$





## Recommended Land Pattern



The MSD1260T series of shielded coupled inductors was designed specifically for high temperature applications – up to 125°C ambient.

Tight coupling ( $k \geq 0.97$ ) and 500 Vrms isolation make them ideal for use in a variety of circuits including flyback, multi-output buck, SEPIC and Zeta. These parts provide high inductance, high efficiency and excellent current handling.

They can also be used as two single inductors connected in series or parallel or as a common mode choke.

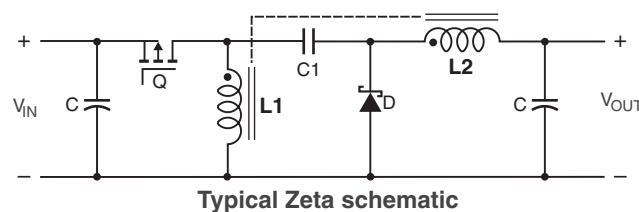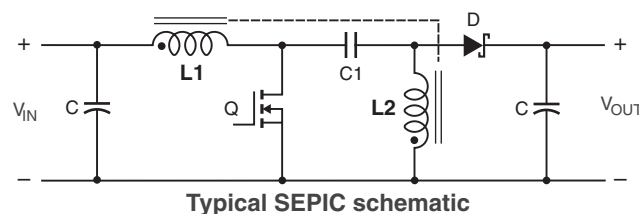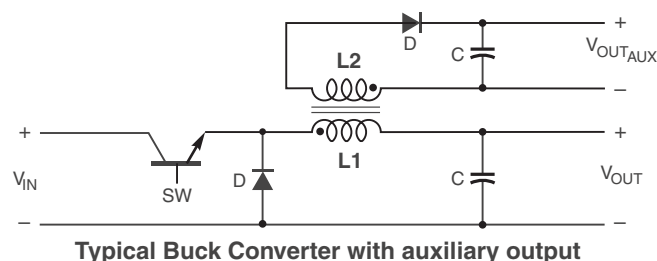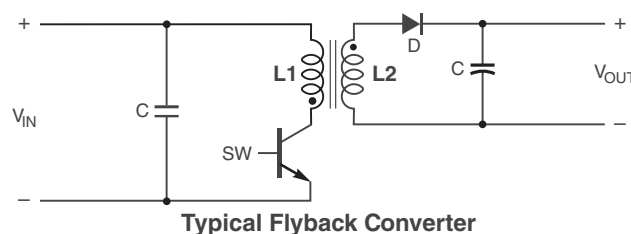

# HIGH TEMPERATURE

## Shielded Coupled Inductors – MSD1260T



| Part number <sup>1</sup> | Inductance <sup>2</sup><br>(μH) | DCR<br>max <sup>3</sup><br>(Ohms) | SRF<br>typ <sup>4</sup><br>(MHz) | Coupling<br>coefficient<br>typ | Leakage<br>L typ <sup>5</sup><br>(μH) | Isat (A) <sup>6</sup> |             |             | Irms (A)                      |                             |
|--------------------------|---------------------------------|-----------------------------------|----------------------------------|--------------------------------|---------------------------------------|-----------------------|-------------|-------------|-------------------------------|-----------------------------|
|                          |                                 |                                   |                                  |                                |                                       | 10%<br>drop           | 20%<br>drop | 30%<br>drop | both<br>windings <sup>7</sup> | one<br>winding <sup>8</sup> |
| MSD1260T-332ML_          | 3.3 ±20%                        | 0.020                             | 52.0                             | 0.97                           | 0.20                                  | 11.50                 | 12.90       | 14.10       | 3.60                          | 6.10                        |
| MSD1260T-472ML_          | 4.7 ±20%                        | 0.036                             | 38.0                             | 0.98                           | 0.20                                  | 9.00                  | 10.18       | 11.08       | 3.16                          | 4.47                        |
| MSD1260T-562ML_          | 5.6 ±20%                        | 0.040                             | 30.0                             | 0.98                           | 0.20                                  | 8.00                  | 9.06        | 9.84        | 3.00                          | 4.24                        |
| MSD1260T-682ML_          | 6.8 ±20%                        | 0.048                             | 27.0                             | 0.98                           | 0.24                                  | 7.00                  | 8.00        | 8.64        | 2.75                          | 3.88                        |
| MSD1260T-822ML_          | 8.2 ±20%                        | 0.052                             | 26.0                             | 0.98                           | 0.25                                  | 6.44                  | 7.38        | 7.98        | 2.63                          | 3.72                        |
| MSD1260T-103ML_          | 10 ±20%                         | 0.060                             | 22.0                             | 0.99                           | 0.26                                  | 5.40                  | 6.32        | 6.88        | 2.45                          | 3.46                        |
| MSD1260T-123ML_          | 12 ±20%                         | 0.074                             | 20.0                             | 0.99                           | 0.28                                  | 5.30                  | 6.18        | 6.70        | 2.21                          | 3.12                        |
| MSD1260T-153ML_          | 15 ±20%                         | 0.085                             | 18.0                             | 0.99                           | 0.32                                  | 4.60                  | 5.30        | 5.80        | 2.06                          | 2.92                        |
| MSD1260T-183ML_          | 18 ±20%                         | 0.097                             | 16.0                             | 0.99                           | 0.40                                  | 4.50                  | 5.22        | 5.68        | 1.93                          | 2.73                        |
| MSD1260T-223ML_          | 22 ±20%                         | 0.116                             | 15.0                             | 0.98                           | 0.67                                  | 4.00                  | 4.62        | 5.02        | 1.76                          | 2.49                        |
| MSD1260T-273ML_          | 27 ±20%                         | 0.124                             | 13.0                             | 0.99                           | 0.50                                  | 3.60                  | 4.14        | 4.50        | 1.70                          | 2.41                        |
| MSD1260T-333ML_          | 33 ±20%                         | 0.134                             | 12.4                             | 0.99                           | 0.65                                  | 3.30                  | 3.80        | 4.14        | 1.64                          | 2.32                        |
| MSD1260T-393ML_          | 39 ±20%                         | 0.142                             | 12.0                             | 0.99                           | 1.09                                  | 3.00                  | 3.48        | 3.82        | 1.59                          | 2.25                        |
| MSD1260T-473ML_          | 47 ±20%                         | 0.174                             | 11.6                             | 0.99                           | 0.80                                  | 2.70                  | 3.12        | 3.40        | 1.44                          | 2.03                        |
| MSD1260T-563ML_          | 56 ±20%                         | 0.198                             | 10.5                             | 0.99                           | 0.75                                  | 2.50                  | 2.90        | 3.14        | 1.35                          | 1.91                        |
| MSD1260T-683ML_          | 68 ±20%                         | 0.216                             | 10.0                             | >0.99                          | 0.57                                  | 2.30                  | 2.66        | 2.88        | 1.29                          | 1.83                        |
| MSD1260T-823ML_          | 82 ±20%                         | 0.274                             | 8.6                              | 0.99                           | 1.52                                  | 2.10                  | 2.40        | 2.60        | 1.15                          | 1.62                        |
| MSD1260T-104ML_          | 100 ±20%                        | 0.322                             | 7.8                              | 0.99                           | 1.41                                  | 1.90                  | 2.18        | 2.38        | 1.06                          | 1.50                        |
| MSD1260T-124KL_          | 120 ±10%                        | 0.418                             | 6.8                              | 0.99                           | 1.34                                  | 1.60                  | 1.84        | 2.04        | 0.93                          | 1.31                        |
| MSD1260T-154KL_          | 150 ±10%                        | 0.476                             | 6.4                              | 0.99                           | 1.52                                  | 1.50                  | 1.76        | 1.92        | 0.87                          | 1.23                        |
| MSD1260T-184KL_          | 180 ±10%                        | 0.536                             | 6.1                              | 0.99                           | 1.80                                  | 1.40                  | 1.64        | 1.78        | 0.82                          | 1.16                        |
| MSD1260T-224KL_          | 220 ±10%                        | 0.691                             | 5.5                              | >0.99                          | 1.60                                  | 1.30                  | 1.48        | 1.60        | 0.72                          | 1.02                        |
| MSD1260T-274KL_          | 270 ±10%                        | 0.806                             | 4.3                              | >0.99                          | 2.23                                  | 1.10                  | 1.30        | 1.40        | 0.67                          | 0.95                        |
| MSD1260T-334KL_          | 330 ±10%                        | 1.09                              | 4.0                              | >0.99                          | 2.39                                  | 1.00                  | 1.16        | 1.26        | 0.57                          | 0.81                        |
| MSD1260T-394KL_          | 390 ±10%                        | 1.20                              | 3.6                              | >0.99                          | 3.72                                  | 0.950                 | 1.11        | 1.23        | 0.55                          | 0.77                        |
| MSD1260T-474KL_          | 470 ±10%                        | 1.59                              | 3.0                              | >0.99                          | 2.89                                  | 0.900                 | 0.994       | 1.09        | 0.48                          | 0.67                        |
| MSD1260T-564KL_          | 560 ±10%                        | 1.81                              | 2.8                              | >0.99                          | 2.55                                  | 0.800                 | 0.908       | 0.948       | 0.45                          | 0.63                        |
| MSD1260T-684KL_          | 680 ±10%                        | 2.06                              | 2.6                              | >0.99                          | 5.76                                  | 0.700                 | 0.804       | 0.874       | 0.42                          | 0.59                        |
| MSD1260T-824KL_          | 820 ±10%                        | 2.65                              | 2.5                              | >0.99                          | 2.86                                  | 0.640                 | 0.732       | 0.802       | 0.37                          | 0.52                        |
| MSD1260T-105KL_          | 1000 ±10%                       | 3.06                              | 2.4                              | >0.99                          | 4.32                                  | 0.590                 | 0.674       | 0.728       | 0.34                          | 0.49                        |

1. When ordering, please specify **termination** and **packaging** codes:

### MSD1260T-105KLD

**Termination:** L = RoHS compliant matte tin over nickel over phos bronze.

Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

**Packaging:** D = 13" machine-ready reel. EIA-481 embossed plastic tape (500 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

- Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 A dc on an Agilent/HP 4284A LCR meter or equivalent. When leads are connected in parallel, inductance is the same value. When leads are connected in series, inductance is four times the value.
- DCR is for each winding. When leads are connected in parallel, DCR is half the value. When leads are connected in series, DCR is twice the value.
- SRF measured using an Agilent/HP 4191A or equivalent. When leads are connected in parallel, SRF is the same value.
- Leakage inductance is for L1 and is measured with L2 shorted.
- DC current, at which the inductance drops the specified amount from its value without current. It is the sum of the current flowing in both windings.
- Equal current when applied to each winding simultaneously that causes a 40°C temperature rise from 25°C ambient.
- Maximum current when applied to one winding that causes a 40°C temperature rise from 25°C ambient.
- Electrical specifications at 25°C.

Refer to Doc 639 "Selecting Coupled Inductors for SEPIC Applications."

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

### Coupled Inductor Core and Winding Loss Calculator

This web-based utility allows you to enter frequency, peak-to-peak (ripple) current, and Irms current to predict temperature rise and overall losses, including core loss. [Go to online calculator.](#)

**Core material** Ferrite

**Core and winding loss** [Go to online calculator](#)

**Terminations** RoHS compliant matte tin over nickel over phos bronze. Other terminations available at additional cost.

**Weight:** 2.8 – 3.2 g

**Ambient temperature** –40°C to +125°C with Irms current

**Maximum part temperature** +165°C (ambient + temp rise)

**Storage temperature** Component: –40°C to +165°C.

Tape and reel packaging: –40°C to +80°C

**Winding-to-winding and winding-to-core isolation** 500 Vrms

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

**Packaging** 500/13" reel; Plastic tape: 24 mm wide, 0.35 mm thick, 16 mm pocket spacing, 6.6 mm pocket depth

**PCB washing** Tested with pure water or alcohol only. For other solvents, see [Doc787\\_PCB\\_Washing.pdf](#).



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 703-2 Revised 12/18/15


© Coilcraft Inc. 2016

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.


**HIGH TEMPERATURE**

# Shielded Coupled Inductors – MSD1260T

## Typical L vs Current

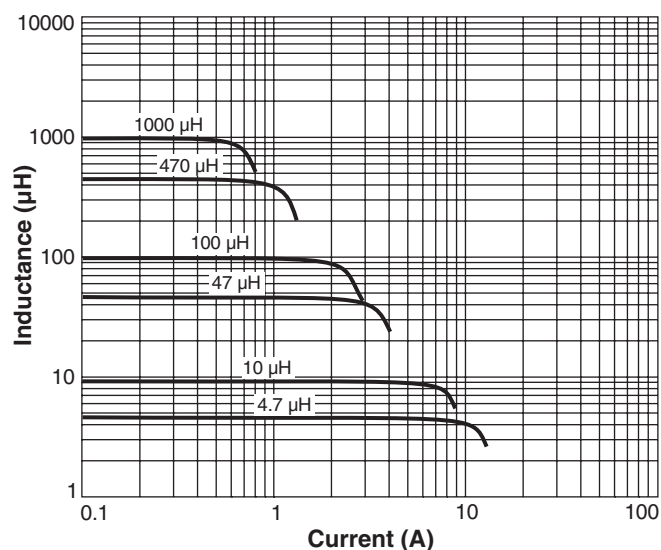

## Typical L vs Frequency

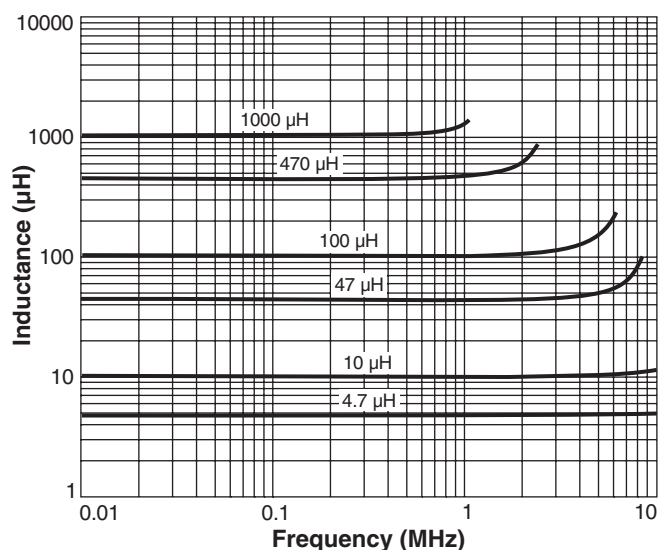
[www.coilcraft.com](http://www.coilcraft.com)

**US** +1-847-639-6400 [sales@coilcraft.com](mailto:sales@coilcraft.com)  
**UK** +44-1236-730595 [sales@coilcraft-europe.com](mailto:sales@coilcraft-europe.com)  
**Taiwan** +886-2-2264 3646 [sales@coilcraft.com.tw](mailto:sales@coilcraft.com.tw)  
**China** +86-21-6218 8074 [sales@coilcraft.com.cn](mailto:sales@coilcraft.com.cn)  
**Singapore** + 65-6484 8412 [sales@coilcraft.com.sg](mailto:sales@coilcraft.com.sg)

Document 703-3 Revised 12/18/15

© Coilcraft Inc. 2016

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Coilcraft:

[MSD1260T-822MLB](#) [MSD1260T-333MLB](#) [MSD1260T-105KLD](#) [MSD1260T-223MLD](#) [MSD1260T-563MLB](#)  
[MSD1260T-472MLB](#) [MSD1260T-562MLD](#) [MSD1260T-684KLB](#) [MSD1260T-683MLD](#) [MSD1260T-393MLD](#)  
[MSD1260T-474KLD](#) [MSD1260T-104MLB](#) [MSD1260T-103MLB](#) [MSD1260T-184KLD](#) [MSD1260T-682MLD](#)  
[MSD1260T-154KLD](#) [MSD1260T-224KLB](#) [MSD1260T-823MLD](#) [MSD1260T-124KLB](#) [MSD1260T-274KLD](#) [MSD1260T-153MLB](#) [MSD1260T-103MLD](#) [MSD1260T-394KLD](#) [MSD1260T-564KLB](#) [MSD1260T-394KLB](#) [MSD1260T-334KLD](#)  
[MSD1260T-474KLB](#) [MSD1260T-123MLB](#) [MSD1260T-822MLD](#) [MSD1260T-473MLD](#) [MSD1260T-223MLB](#)  
[MSD1260T-683MLB](#) [MSD1260T-154KLB](#) [MSD1260T-153MLD](#) [MSD1260T-123MLD](#) [MSD1260T-274KLB](#)  
[MSD1260T-824KLB](#) [MSD1260T-562MLB](#) [MSD1260T-183MLB](#) [MSD1260T-273MLB](#) [MSD1260T-183MLD](#)  
[MSD1260T-564KLD](#) [MSD1260T-104MLD](#) [MSD1260T-563MLD](#) [MSD1260T-332MLB](#) [MSD1260T-824KLD](#)  
[MSD1260T-105KLB](#) [MSD1260T-823MLB](#) [MSD1260T-224KLD](#) [MSD1260T-473MLB](#) [MSD1260T-393MLB](#)  
[MSD1260T-334KLB](#) [MSD1260T-332MLD](#) [MSD1260T-333MLD](#) [MSD1260T-684KLD](#) [MSD1260T-273MLD](#)  
[MSD1260T-184KLB](#) [MSD1260T-124KLD](#) [MSD1260T-682MLB](#) [MSD1260T-472MLD](#)