


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
B	REVISED AND REDRAWN PER ECN T-17680	92 Aug 12	J.B.
C	REVISE PER DCR# T-22768	4/16/99	M.HIGGY

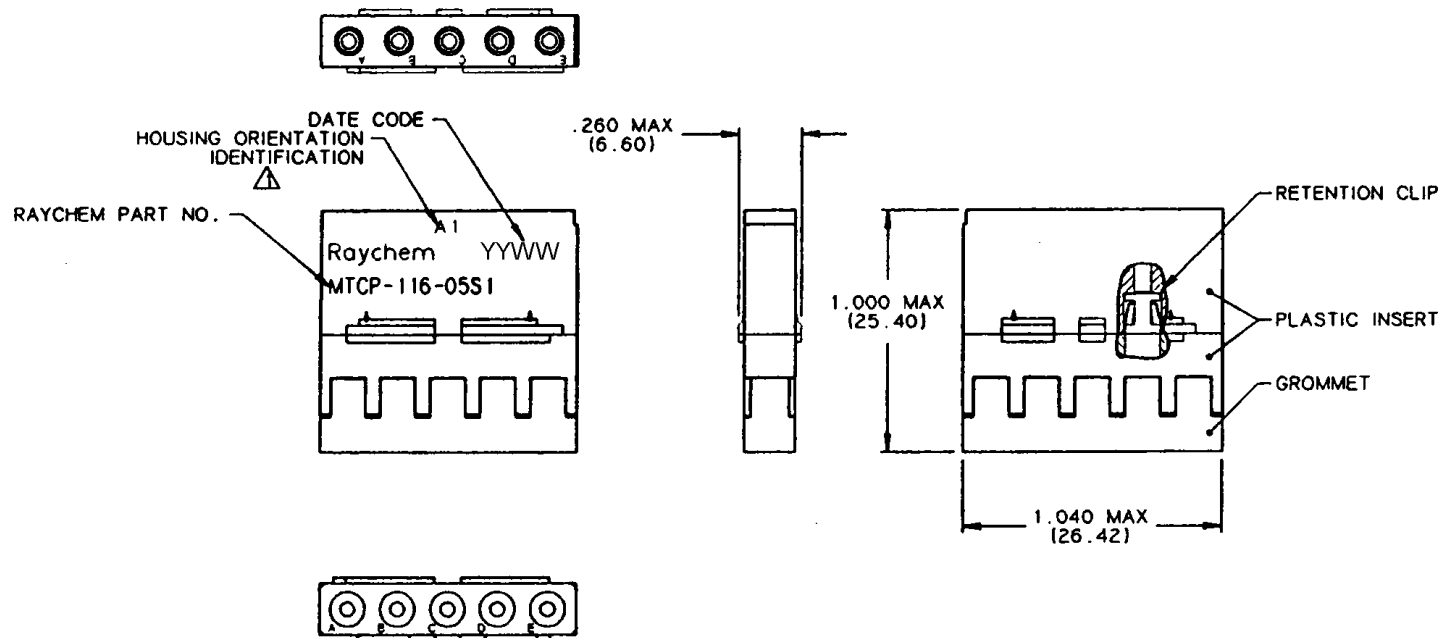

NOTES:

1. MTC100-JH1-XXX OR MTC100-JH2-XXX (SEE RAYCHEM INFORMATION DRAWING D-659-0097 AND HOUSING SCD's FOR FURTHER DETAILS).

2. USE MIL-C-38999 SERIES 2 SIZE 16 CONTACTS OR EQUIVALENT. REFERENCE D-659-0097 FOR INSERTION/REMOVAL TOOLS. SEALING PLUGS AND CRIMP TOOLS WHEN APPLICABLE. THESE COMPONENTS ARE TO BE ORDERED SEPARATELY.

3. GROMMET DESIGNED TO SEAL ON WIRES HAVING AN INSULATION DIAMETER OF .065 IN. (1.65mm) TO .109 IN. (2.77mm).

4. PERFORMANCE:
THIS PRODUCT MEETS THE REQUIREMENTS OF RAYCHEM SPECIFICATION C-6115.

5. MATERIALS:
A) PLASTIC INSERT HIGH GRADE POLYARYLENE THERMOPLASTIC
B) GROMMET FLUOROSILICONE PER MIL-R-25988
C) INTERFACIAL SEAL FLUOROSILICONE PER MIL-R-25988
D) RETENTION CLIP BERYLLIUM COPPER 172 PER QQ-C-533

WEIGHT: 0.0095 lbs [4.300 Grams] MAXIMUM.

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.	REDRAWN	PIQUE'	92AUG10	Raychem			RAYCHEM CORPORATION 500 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025		
	ORG. DRW	ALEXANDER	84OCT24						
	CHECKED	J. BLAIR	84OCT24	TITLE INSERT, SOCKET PRIMARY 5 NUMBER 16 CAVITIES POWER BLOCK CONNECTOR TEMPERATURE RATING 125°C MTC SERIES					
	APPROVED	J. CAMERON	84OCT24						
	CAD NAME: T22768.TIF								
DECIMALS .XXX ± .XX ± ANGLES .X ±	THIRD ANGLE PROJECTION			SIZE B	CODE IDENT. NO. 06090	DWG. NO. MTCP-116-05S1	REV C		
WEIGHT: 				DO NOT SCALE THIS DRAWING			SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[MTCP-116-05S1CS2820](#)