



版数 REV.	年月日 DATE	DGN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
2	03/AUG/2009	068390	REDRAWN AND CORRECT AN ERROR	T. MORITA	N. KUROIWA	—	T. TOTANI
3	13/MAY/2011	072061	ADD THE LOGO OF "SPECIAL CONTROL ITEM"	—	N. KUROIWA	—	N. Orie

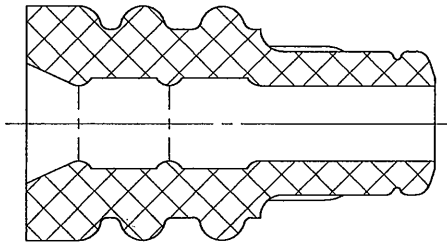


SECT A-A

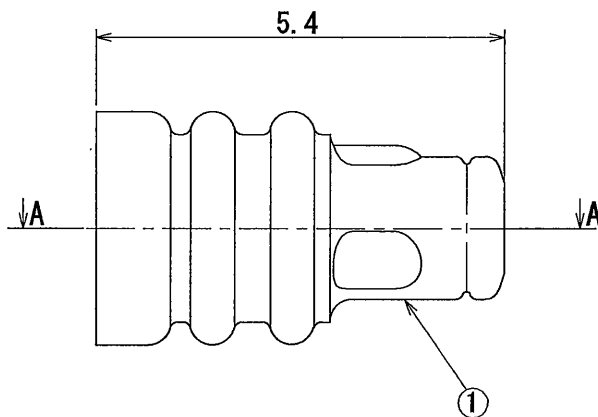

△3

特別管理品目
SPECIAL CONTROL ITEM
MX (AUTO)

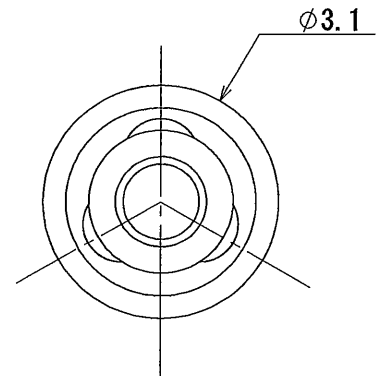

NOTE 1. APPLICABLE INSULATION OUTER DIA. : $\phi 1.4 \sim \phi 1.5$
(AVSS0.3sq)
注1. 適合被覆外径 $\phi 1.4 \sim \phi 1.5$ (AVSS0.3sq)

1	WIRE SEAL	1	SILICONE RUBBER △2	—	COLOR: BULE
符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE)		名称 (TITLE)	
JACS-10389		12/JUL/2007		MX44000XP1	
一般公差 (GENERAL TOLERANCE)		製図 DR.	T. MORITA	日本航空電子工業株式会社 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD. 図面番号 (DRAWING NO.) SJ107064	
寸法 (DIMENSION)		担当 CHK.	Y. NAKAMURA		
角度 (ANGLES)		査閲 APPD.	—		
承認 APPD.		承認 APPD.	T. TOTANI		
± 0.8	×° ±			シリーズ (SERIES)	尺度 (SCALE)
× ± 0.4	×° ' ±			MX44	10 : 1
×× ± 0.1					
××× ±					

DCF-C-211F (05.08)

S/W

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JAE Electronics:](#)

[MX44000XP1](#)