
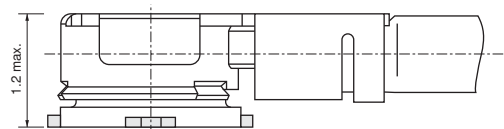


Microwave Coaxial Connectors

Microwave Coaxial Cable Connectors



MM4829-2702

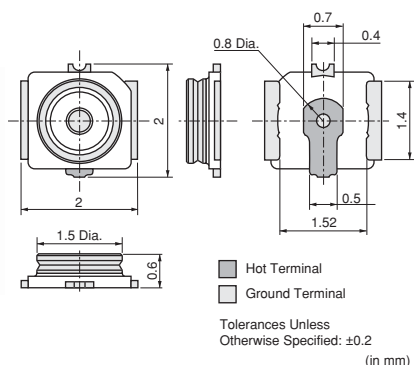

(in mm)

Dimensions

MM5829-2700

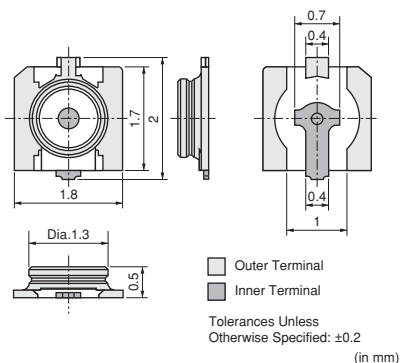

(in mm)


Dimensions

Part Number	Rated Voltage (Vrms)	Frequency Rating (GHz)	Temperature Range	VSWR
MM4829-2702	30	to 6.0	-40 to +85°C	1.3 max. (DC to 3GHz)
MM5829-2700	30	to 12	-40 to +85°C	1.3 max. (DC to 3GHz)
MXHP32_____	30	to 6.0	-40 to +85°C	1.3 max. (DC to 3GHz)
MXJA01_____	30	to 12	-40 to +85°C	1.3 max. (DC to 3GHz)

Impedance: 50ohm

☐ Continued from the preceding page.

**Measurement Probe for MM8930-2600
 (P/N: MXHQ87PA3000)**

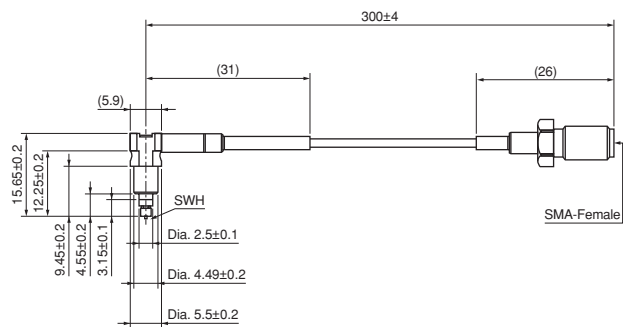

(in mm)

Part Number	Rated Voltage (Vrms)	Frequency Rating (GHz)	Temperature Range	VSWR
MM8030-2610	30	to 11	-40 to +85°C	1.2 max. (DC to 3GHz)
MM8130-2600	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)
MM8430-2610	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)
MM8930-2600	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)

Impedance: 50ohm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

[MM126036](#) [MM9329-2700RB5](#) [MXHS83QE3000](#) [MM8130-2600RA2](#) [MXHS83QE1000](#) [MXHS83QH1000](#)
[MM126310](#) [MM5829-2700RJ4](#) [MM4829-2702RB0](#) [MXHS83QH3000](#) [MXHQ87WA3000](#) [MM5829-2700RK0](#)