


3-TERMINAL NEGATIVE VOLTAGE REGULATOR

■ GENERAL DESCRIPTION

The NJM79L00 series of 3-Terminal Negative Voltage Regulators is constructed using the New JRC Planar epitaxial process. These regulators employ internal current-limiting, and thermal-shutdown, making them essentially indestructible. If adequate heat sinking is provided, they can deliver up to 100mA output current. They are intended as fixed voltage regulators in a wide range of applications including local or on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power pass elements to make high-current voltage regulators. The NJM79L00 used as a Zener diode/resistor combination replacement, offers an effective output impedance improvement of typically two orders of magnitude, along with lower quiescent current and lower noise.

■ PACKAGE OUTLINE




1. COMMON
2. IN
3. OUT

NJM79L00UA (SOT-89)

■ FEATURES

- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Excellent Ripple Rejection
- Guarantee'd 100mA Output Current
- Output Capacitor recommended electrolytic capacitor
- Bipolar Technology
- Package Outline SOT-89

■ EQUIVALENT CIRCUIT

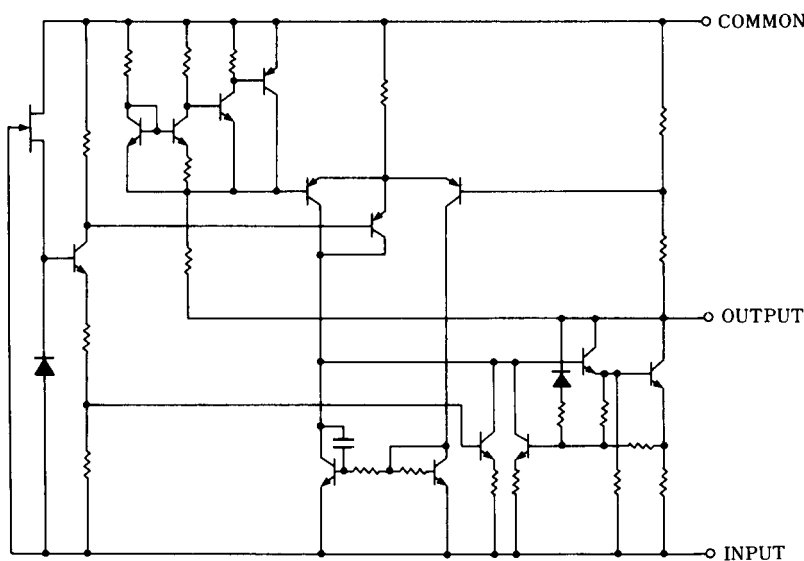

NJM79L00

■ ABSOLUTE MAXIMUM RATINGS

(T_a=25 °C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{IN}	(79L03A to 79L09A) - 30 (79L12A to 79L15A) - 35 (79L18A to 79L24A) - 40	V
Operating Temperature Range	T _{opr}	-40 to +85	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C
Power Dissipation	P _D	(SOT89) 350	mW

■ ELECTRICAL CHARACTERISTICS (C_{IN}=0.33μF, C_O=1.0μF, T_j=25 °C)

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM79L03UA						
Output Voltage	V _O	V _{IN} =-10V, I _O =40mA	-2.88	-3.0	-3.12	V
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-7 to -20V, I _O =40mA	-	10	60	mV
Load Regulation	ΔV _O - I _O	V _{IN} =-10V, I _O =1 to 100mA	-	4	72	mV
Quiescent Current	I _Q	V _{IN} =-10V, I _O =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V _{IN} =-8 to -18V, I _O =40mA, e _{in} =1V _{P-P} , f=120Hz	45	72	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-10V, BW=10Hz to 100kHz, I _O =40mA	-	70	-	μV
NJM79L05UA						
Output Voltage	V _O	V _{IN} =-10V, I _O =40mA	-4.8	-5.0	-5.2	V
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-7 to -20V, I _O =40mA	-	15	150	mV
Load Regulation	ΔV _O - I _O	V _{IN} =-10V, I _O =1 to 100mA	-	7	60	mV
Quiescent Current	I _Q	V _{IN} =-10V, I _O =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V _{IN} =-8 to -18V, I _O =40mA, e _{in} =1V _{P-P} , f=120Hz	41	71	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-10V, BW=10Hz to 100kHz, I _O =40mA	-	120	-	μV
NJM79L06UA						
Output Voltage	V _O	V _{IN} =-12V, I _O =40mA	-5.76	-6.0	-6.24	V
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-8.5 to -20V, I _O =40mA	-	18	150	mV
Load Regulation	ΔV _O - I _O	V _{IN} =-12V, I _O =1 to 100mA	-	8	70	mV
Quiescent Current	I _Q	V _{IN} =-12V, I _O =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V _{IN} =-9 to -19V, I _O =40mA, e _{in} =1V _{P-P} , f=120Hz	40	68	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-12V, BW=10Hz to 100kHz, I _O =40mA	-	140	-	μV

■ ELECTRICAL CHARACTERISTICS (C_{IN}=0.33μF, C_O=1.0μF, T_J=25 °C)

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM79L07UA						
Output Voltage	V _O	V _{IN} =-13V, I _O =40mA	-6.72	-7.0	-7.28	V
Line Regulation	ΔV _O -V _{IN}	V _{IN} =-9.5~-22V, I _O =40mA	-	21	160	mV
Load Regulation	ΔV _O -I _O	V _{IN} =-13V, I _O =1~100mA	-	9	75	mV
Quiescent Current	I _Q	V _{IN} =-13V, I _O =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V _{IN} =-10~-20V, I _O =40mA, e _{in} =1V _{P-P} , f=120Hz	40	68	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-13V, BW=10Hz~100kHz, I _O =40mA	-	170	-	μV
NJM79L08UA						
Output Voltage	V _O	V _{IN} =-14V, I _O =40mA	-7.68	-8.0	-8.32	V
Line Regulation	ΔV _O -V _{IN}	V _{IN} =-10.5 to -23V, I _O =40mA	-	24	175	mV
Load Regulation	ΔV _O -I _O	V _{IN} =-14V, I _O =1 to 100mA	-	10	80	mV
Quiescent Current	I _Q	V _{IN} =-14V, I _O =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V _{IN} =-11 to -21V, I _O =40mA, e _{in} =1V _{P-P} , f=120Hz	39	68	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-14V, BW=10Hz to 100kHz, I _O =40mA	-	190	-	μV
NJM79L09UA						
Output Voltage	V _O	V _{IN} =-15V, I _O =40mA	-8.64	-9.0	-9.36	V
Line Regulation	ΔV _O -V _{IN}	V _{IN} =-11.5 to -24V, I _O =40mA	-	27	200	mV
Load Regulation	ΔV _O -I _O	V _{IN} =-15V, I _O =1 to 100mA	-	12	90	mV
Quiescent Current	I _Q	V _{IN} =-15V, I _O =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V _{IN} =-12 to -22V, I _O =40mA, e _{in} =1V _{P-P} , f=120Hz	38	67	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-15V, BW=10Hz to 100kHz, I _O =40mA	-	210	-	μV
NJM79L12UA						
Output Voltage	V _O	V _{IN} =-19V, I _O =40mA	-11.5	-12.0	-12.5	V
Line Regulation	ΔV _O -V _{IN}	V _{IN} =-14.5 to -27V, I _O =40mA	-	36	250	mV
Load Regulation	ΔV _O -I _O	V _{IN} =-19V, I _O =1 to 100mA	-	16	100	mV
Quiescent Current	I _Q	V _{IN} =-19V, I _O =0mA	-	3.5	6.5	mA
Ripple Rejection	RR	V _{IN} =-15 to -25V, I _O =40mA, e _{in} =1V _{P-P} , f=120Hz	37	64	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-19V, BW=10Hz to 100kHz, I _O =40mA	-	210	-	μV


■ ELECTRICAL CHARACTERISTICS (C_{IN}=0.33μF, C_O=1.0μF, T_J=25°C)

Measurement is to be conducted in pulse testing.


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM79L15UA						
Output Voltage	V _O	V _{IN} =-23V, I _O =40mA	-14.4	-15.0	-15.6	V
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-17.5 to -30V, I _O =40mA	-	45	300	mV
Load Regulation	ΔV _O - I _O	V _{IN} =-23V, I _O =1 to 100mA	-	20	150	mV
Quiescent Current	I _Q	V _{IN} =-23V, I _O =0mA	-	3.5	6.5	mA
Ripple Rejection	RR	V _{IN} =-18.5 to -28.5V, I _O =40mA, e _{in} =1V _{P-P} , f=120Hz	34	63	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-23V, BW=10Hz to 100kHz, I _O =40mA	-	340	-	μV
NJM79L18UA						
Output Voltage	V _O	V _{IN} =-27V, I _O =40mA	-17.3	-18.0	-18.7	V
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-20.7 to -33V, I _O =40mA	-	54	325	mV
Load Regulation	ΔV _O - I _O	V _{IN} =-27V, I _O =1 to 100mA	-	23	170	mV
Quiescent Current	I _Q	V _{IN} =-27V, I _O =0mA	-	3.5	6.5	mA
Ripple Rejection	RR	V _{IN} =-23 to -33V, I _O =40mA, e _{in} =1V _{P-P} , f=120Hz	33	60	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-27V, BW=10Hz to 100kHz, I _O =40mA	-	410	-	μV
NJM79L24UA						
Output Voltage	V _O	V _{IN} =-33V, I _O =40mA	-23.0	-24.0	-25.0	V
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-27 to -38V, I _O =40mA	-	72	350	mV
Load Regulation	ΔV _O - I _O	V _{IN} =-33V, I _O =1 to 100mA	-	30	200	mV
Quiescent Current	I _Q	V _{IN} =-33V, I _O =0mA	-	3.5	6.5	mA
Ripple Rejection	RR	V _{IN} =-29 to -35V, I _O =40mA, e _{in} =1V _{P-P} , f=120Hz	31	55	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-33V, BW=10Hz to 100kHz, I _O =40mA	-	550	-	μV

■ TEST CIRCUIT


1. Output Voltage, Output Current, Line Regulation, Load Regulation, Quiescent Current, Output Noise Voltage

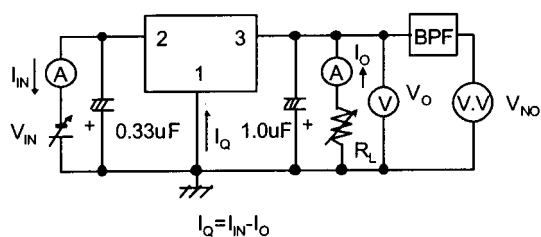

2. Ripple Rejection

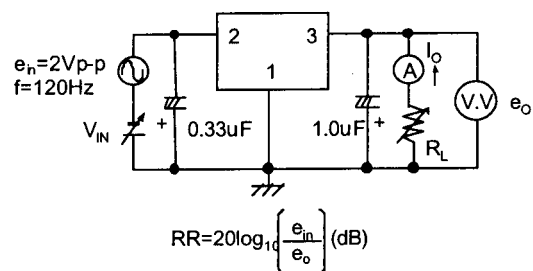


■ POWER DISSIPATION VS. AMBIENT TEMPERATURE

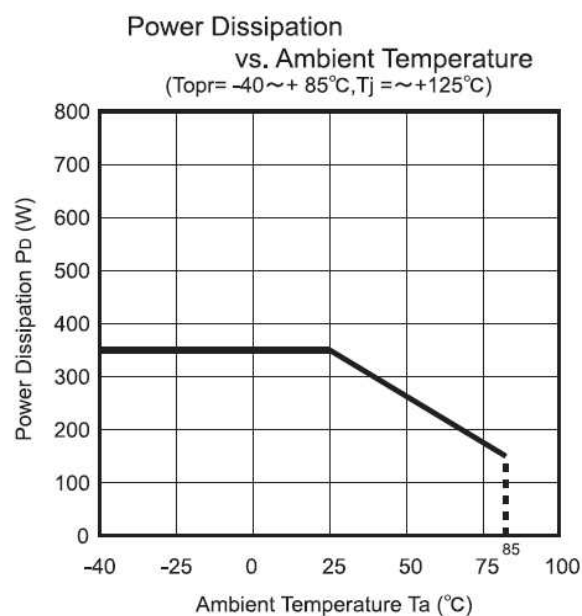

■ TYPICAL CHARACTERISTICS


**NJM79L00 Input Voltage
vs. Output Voltage**

($I_O = 40\text{mA}$, $T_J = 25^\circ\text{C}$)

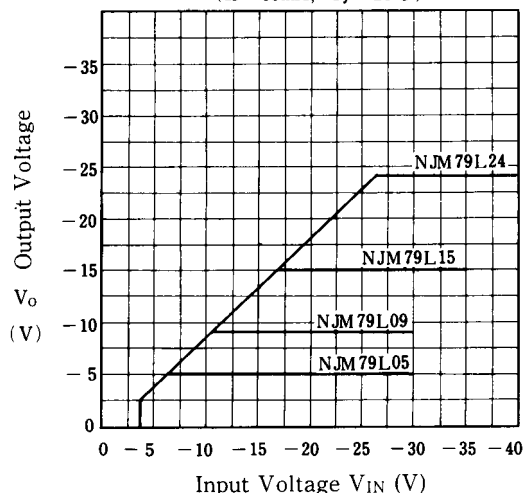


NJM79L05/15/24 Load Characteristics

($T_J = 25^\circ\text{C}$)

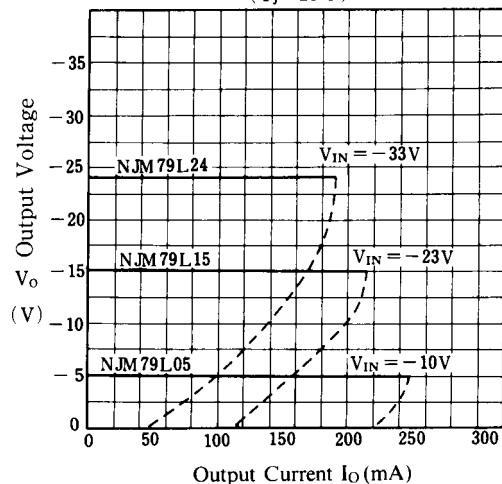


NJM79L00 Series Short Circuit Current

($T_J = 25^\circ\text{C}$)

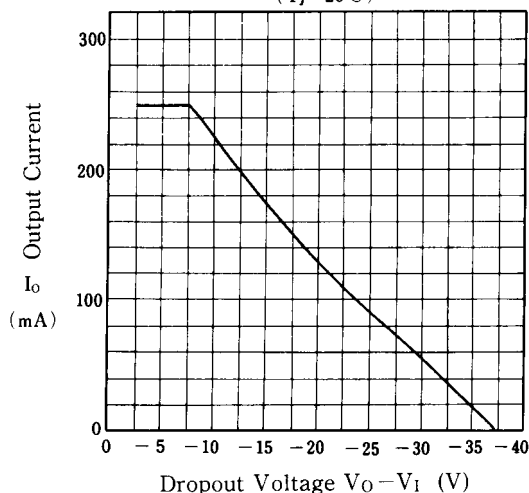


**NJM79L05/12/24 Output Voltage
vs. Junction Temperature**

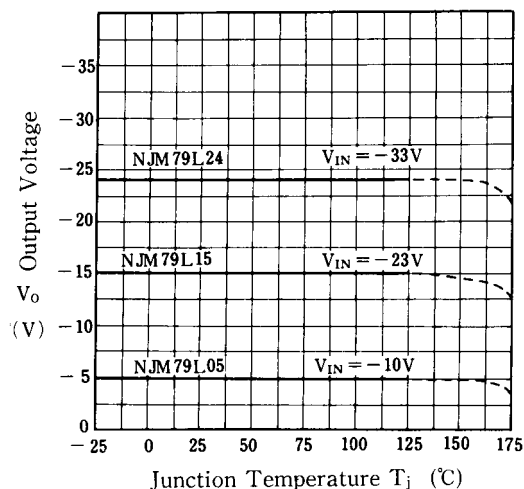


**NJM79L05/15/24 Ripple Rejection
vs. Frequency**

($I_O = 40\text{mA}$, $e_{in} = 2V_{P-P}$, $T_J = 25^\circ\text{C}$)

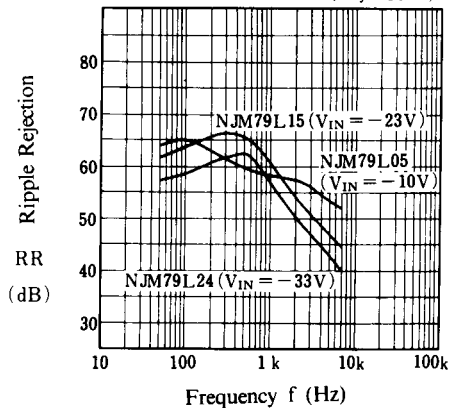

Quiescent Current vs. Input Voltage


($I_O = 0\text{mA}$, $T_J = 25^\circ\text{C}$)

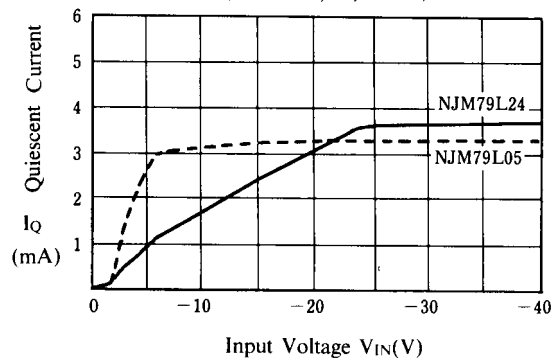

■ TYPICAL CHARACTERISTICS


NJM79L05 Dropout Characteristics

($T_j = 25^\circ\text{C}$)

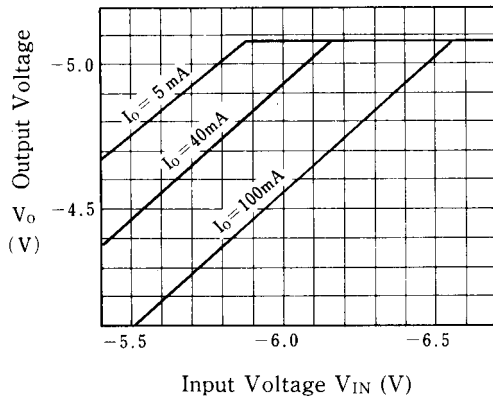


NJM79L08 Dropout Characteristics


($T_j = 25^\circ\text{C}$)

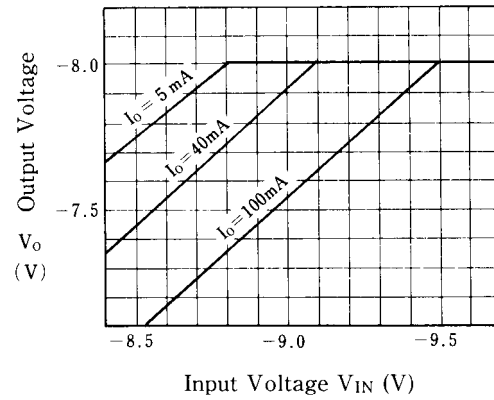

NJM79L05 Output Voltage vs. Temperature

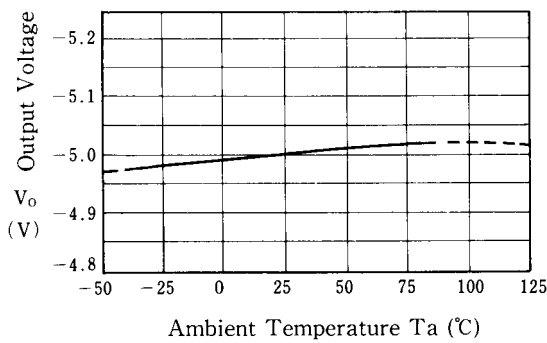

NJM79L08 Output Voltage vs. Temperature

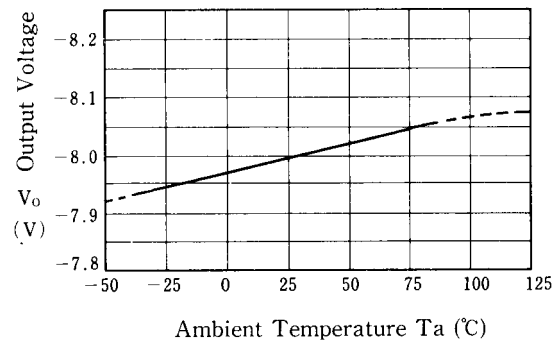


NJM79L00 Equivalent Series Resistance vs. Output Current

V_{in} =Output voltage of the conditions described in the ELECTRICAL CHARACTERISTICS

$T_a=25^\circ\text{C}$, $C_{in}=0.33\mu\text{F}$, $C_o=1.0\mu\text{F}$ (Ceramic capacitor)

Recommended Capacitor is Electrolytic Capacitor

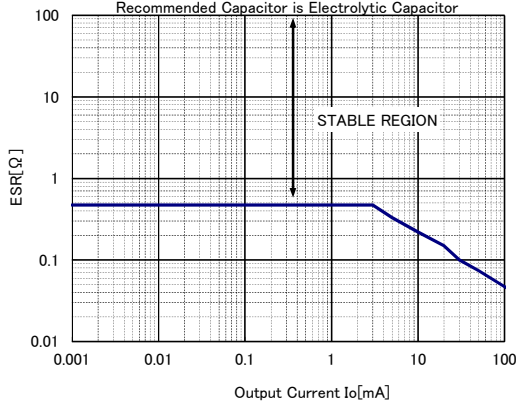

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM79L05UA-TE2](#) [NJM79L12UA-TE1](#) [NJM79L05UA-TE1](#) [NJM79L05A](#) [NJM79L05A-T1](#) [NJM79L05A-T3](#)
[NJM79L05A-T2](#) [NJM79L08UA-TE1](#) [NJM79L09UA-TE1](#)