


Hi-Rel Slotted Optical Switches

Types OPB870N, OPB870L, OPB870P, OPB870T Series

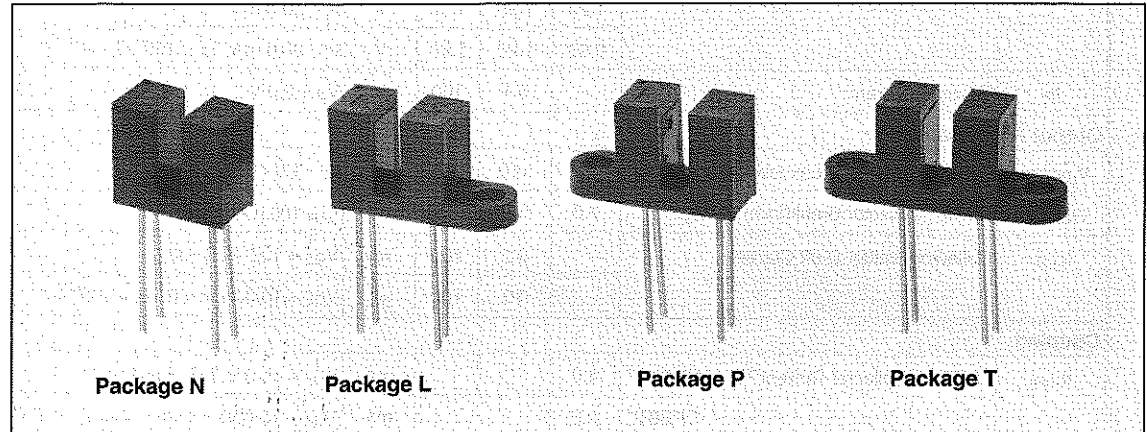

Features

- Non-contact switching
- Choice of apertures
- Choice of minimum $I_{C(ON)}$
- Hermetically sealed components
- Components processed to Optek's screening program patterned after MIL-PRF-19500 for TX and TXV devices
- S level processing available
- Plastic meets NASA publication 1124

Description

The OPB870 series slotted optical switch consists of a gallium aluminum arsenide LED and a silicon phototransistor soldered into a printed circuit board then mounted in a high temperature plastic housing on opposite sides of a 0.125 inch (3.18 mm) wide slot. Phototransistor switching takes place whenever an opaque object passes through the slot. Options include phototransistor aperture widths of 0.050 inches (1.27 mm) or 0.010 inches (0.25 mm) for high resolution positioning sensing.

The OPB870 hi-rel series uses optoelectronic components that have been processed and tested as either TX or TXV components per MIL-PRF-19500. Typical screening and lot acceptance tests are provided on page 13-4.

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Operating Temperature Range	-65°C to $+125^\circ\text{C}$
Storage Temperature Range	-65°C to $+150^\circ\text{C}$
Lead Soldering Temperature [1/16 inch (1.6 mm) from case 5 sec. with soldering iron]	240°C

Input Diode

Forward DC Current	50 mA
Reverse Voltage	2.0 V
Power Dissipation	100 mW ⁽²⁾

Output Phototransistor

Collector-Emitter Voltage	50 V
Emitter-Collector Voltage	7.0 V
Power Dissipation	100 mW ⁽²⁾

Notes:

- (1) Duration can be extended to 10 sec. max. when flow soldering.
- (2) Derate linearly 1.00 mW/ $^\circ\text{C}$ above 25°C .
- (3) Methanol or isopropanol are recommended as cleaning agents.

Part Number Guide

OPB 87X X 5X XX

Optek Assembly Prefix

Electrical Specification Variation
0 = Electrical Parameter A
1 = Electrical Parameter B
2 = Electrical Parameter C

Mounting Configuration
T = Both mounting tabs
N = No tabs
L = Single mounting tab, LED side
P = Single mounting tab, phototransistor side

*Parameter "A" only

Component Product Assurance Level
TX = Patterned Around TX of MIL-PRF-19500
TV = Patterned Around TXV of MIL-PRF-19500

Aperture width in front of phototransistor
5 = 0.050" (1.27 mm)
1 = 0.010" (0.25 mm)*
Aperture length is 0.060" (1.52 mm)

Aperture width in front of LED
5 = 0.050" (1.27 mm)
Aperture length is 0.060" (1.52 mm)

Type OPB870 Series

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Symbol	Parameter	Min	Typ	Max	Units	Test Conditions	
Input Diode							
V _F	Forward Voltage ⁽⁴⁾	1.00	1.35	1.70	V	I _F = 20.0 mA	
		1.20	1.55	1.90	V	I _F = 20.0 mA, T _A = -55° C	
		0.80	1.20	1.60	V	I _F = 20.0 mA, T _A = 100° C	
I _R	Reverse Current		0.1	10	μA	V _R = 2.0 V	
Output Phototransistor							
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	50	110		V	I _C = 1.0 mA, I _F = 0	
V _{(BR)ECO}	Emitter-Collector Breakdown Voltage	7.0	10.0		V	I _E = 100 μA, I _F = 0	
I _{C(off)}	Collector-Emitter Dark Current		0.2	100	nA	V _{CE} = 10.0 V, I _F = 0	
			10	100	μA	V _{CE} = 10.0 V, I _F = 0, T _A = 100° C	
Coupled							
I _{C(ON)}	On-State Collector Current ⁽⁴⁾						
	Parameter A	OPB870	500		μA	V _{CE} = 10.0 V, I _F = 20.0 mA	
		OPB870	200		μA	V _{CE} = 10.0 V, I _F = 20.0 mA, T _A = -55° C	
		OPB870	200		μA	V _{CE} = 10.0 V, I _F = 20.0 mA, T _A = 100° C	
	Parameter B	OPB871	1000		μA	V _{CE} = 5.0 V, I _F = 10.0 mA	
		OPB871	400		μA	V _{CE} = 5.0 V, I _F = 10.0 mA, T _A = -55° C	
		OPB871	400		μA	V _{CE} = 5.0 V, I _F = 10.0 mA, T _A = 100° C	
	Parameter C	OPB872	1800		μA	V _{CE} = 0.4 V, I _F = 20.0 mA	
		OPB872	800		μA	V _{CE} = 0.4 V, I _F = 20.0 mA, T _A = -55° C	
		OPB872	800		μA	V _{CE} = 0.4 V, I _F = 20.0 mA, T _A = 100° C	
V _{CE(SAT)}	Collector-Emitter Saturation Voltage	OPB870		0.20	0.30	V	I _C = 400 μA, I _F = 20.0 mA
		OPB871		0.20	0.30	V	I _C = 800 μA, I _F = 10.0 mA
		OPB872		0.20	0.30	V	I _C = 1800 μA, I _F = 20.0 mA
t _r	Output Rise Time	OPB870		8.0	15.0	μs	V _{CC} = 10.0 V, I _F = 20.0 mA, R _L = 1000 Ω
		OPB871		12.0	20.0	μs	
		OPB872		12.0	20.0	μs	
t _f	Output Fall Time	OPB870		8.0	15.0	μs	V _{CC} = 10.0 V, I _F = 20.0 mA, R _L = 1000 Ω
		OPB871		12.0	20.0	μs	
		OPB872		12.0	20.0	μs	

(4) Measurement is taken during the last 500 μs of a single 1.0 ms test pulse. Heating due to increased pulse rate or pulse width can cause change in measurement results.


Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc. 1215 W. Crosby Road Carrollton, Texas 75006 (972)323-2200 Fax (972)323-2396


Type OPB870 Series




Package Configuration T

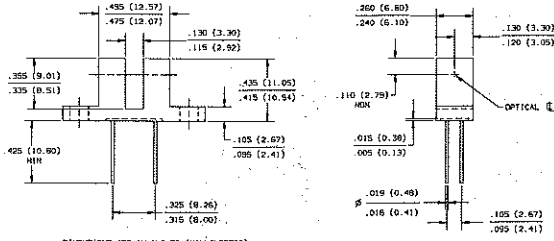


DIMENSIONS ARE IN INCHES (MILLIMETERS)

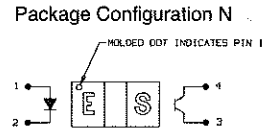


Package Configuration N

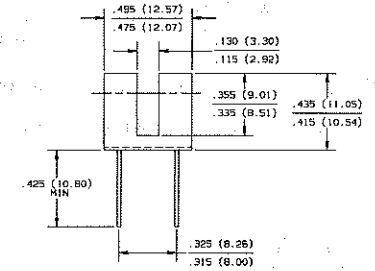


DIMENSIONS ARE IN INCHES (MILLIMETERS)

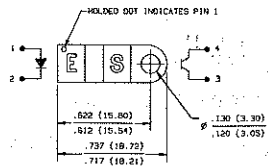


Package Configuration P

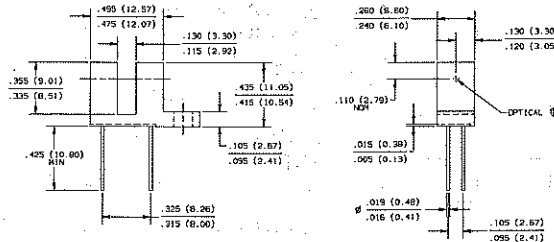

DIMENSIONS ARE IN INCHES (MILLIMETERS)





Package Configuration L

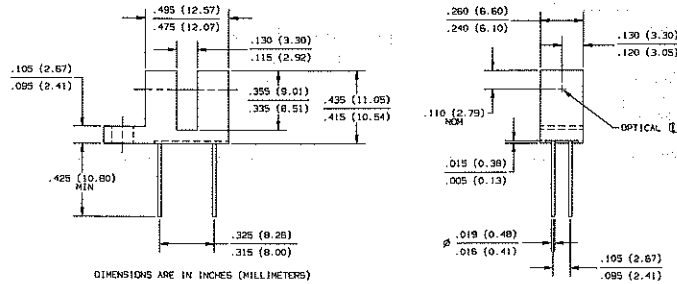


DIMENSIONS ARE IN INCHES (MILLIMETERS)

Type OPB870 Series


Typical Performance Curves

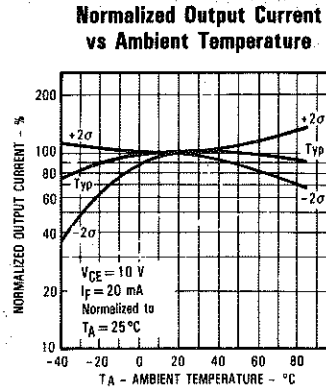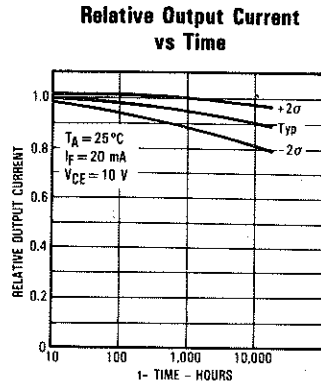


Reduction in Output Current Due to LED Heating vs Forward Current



Normalized Output Current vs Input Current



Rise and Fall Time vs Load Resistance



Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc. 1215 W. Crosby Road Carrollton, Texas 75006 (972)323-2200 Fax (972)323-2396