



NIKO-SEM**N-Channel Enhancement Mode
Field Effect Transistor****P1260ATF:TO-220F****P1260ATFS:TO-220FS****Halogen-Free & Lead-Free****PRODUCT SUMMARY**

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
600V	0.65Ω	12A



1. GATE
2. DRAIN
3. SOURCE

100% UIS tested**ABSOLUTE MAXIMUM RATINGS ($T_C = 25\text{ }^\circ\text{C}$ Unless Otherwise Noted)**

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	600	V
Gate-Source Voltage		V_{GS}	± 30	V
Continuous Drain Current ²	$T_C = 25\text{ }^\circ\text{C}$	I_D	12	A
	$T_C = 100\text{ }^\circ\text{C}$		8.5	
Pulsed Drain Current ^{1,2}		I_{DM}	48	
Avalanche Current ³		I_{AS}	7.4	A
Avalanche Energy ³	$L = 10\text{mH}$	E_{AS}	277	mJ
Power Dissipation	$T_C = 25\text{ }^\circ\text{C}$	P_D	50	W
	$T_C = 100\text{ }^\circ\text{C}$		20	
Operating Junction & Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$		2.5	$^\circ\text{C} / \text{W}$
Junction-to-Ambient	$R_{\theta JA}$		62.5	

¹Pulse width limited by maximum junction temperature.²Limited only by maximum temperature allowed³ $V_{DD} = 60\text{V}$, starting $T_J = 25\text{ }^\circ\text{C}$ **ELECTRICAL CHARACTERISTICS ($T_C = 25\text{ }^\circ\text{C}$, Unless Otherwise Noted)**

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	600			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.5		4.5	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 30V$			± 100	nA
Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 600V, V_{GS} = 0V, T_C = 25^\circ C$			25	μA
		$V_{DS} = 600V, V_{GS} = 0V, T_C = 100^\circ C$			250	

REV 0.1


Apr-16-2010

NIKO-SEM**N-Channel Enhancement Mode
Field Effect Transistor****P1260ATF:TO-220F****P1260ATFS:TO-220FS****Halogen-Free & Lead-Free**


Drain-Source On-State Resistance ¹	R _{DS(ON)}	V _{GS} = 10V, I _D = 6A		0.475	0.65	Ω
Forward Transconductance ¹	g _{fs}	V _{DS} = 40V, I _D = 6A		16		S
DYNAMIC						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 25V, f = 1MHz		2290		pF
Output Capacitance	C _{oss}			281		
Reverse Transfer Capacitance	C _{rss}			46		
Total Gate Charge ²	Q _g	V _{DD} = 300V, I _D = 6A, V _{GS} = 10V		46.5		nC
Gate-Source Charge ²	Q _{gs}			10		
Gate-Drain Charge ²	Q _{gd}			16.1		
Turn-On Delay Time ²	t _{d(on)}	V _{DD} = 300V, I _D = 6A, R _G = 25Ω		35		nS
Rise Time ²	t _r			120		
Turn-Off Delay Time ²	t _{d(off)}			115		
Fall Time ²	t _f			90		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T _C = 25 °C)						
Continuous Current ³	I _S				12	A
Forward Voltage ¹	V _{SD}	I _F =8A, V _{GS} = 0V			1.4	V
Reverse Recovery Time	t _{rr}	I _F = 12 A, dI _F /dt = 100A / μS		420		nS
Reverse Recovery Charge	Q _{rr}	V _{GS} = 0V		4.7		uC

¹Pulse test : Pulse Width $\leq 300 \mu sec$, Duty Cycle $\leq 2\%$.²Independent of operating temperature.³Pulse width limited by maximum junction temperature.**REMARK: THE PRODUCT MARKED WITH "P1260ATF(S)", DATE CODE or LOT #**


Output Characteristics

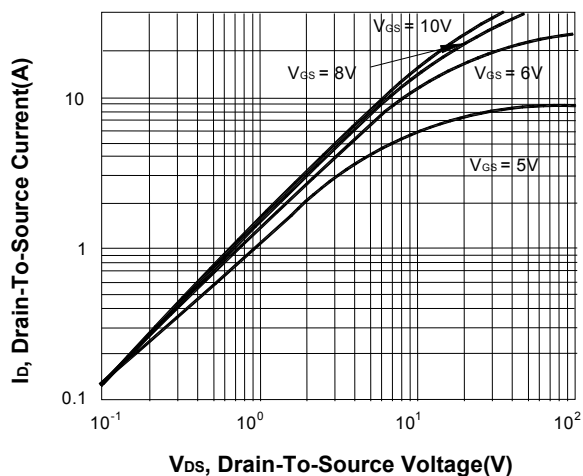


Transfer Characteristics

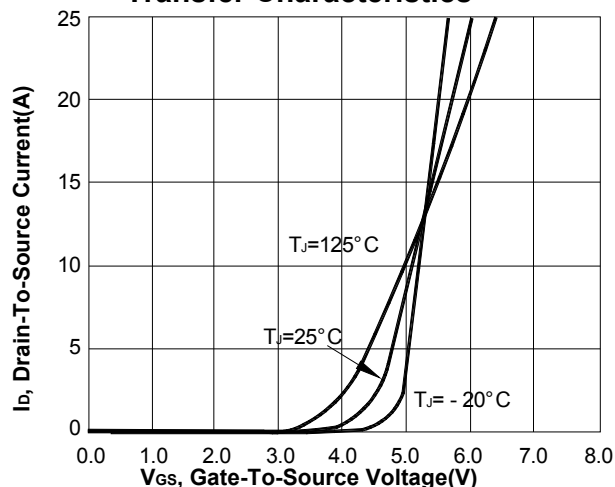


On-Resistance VS Temperature

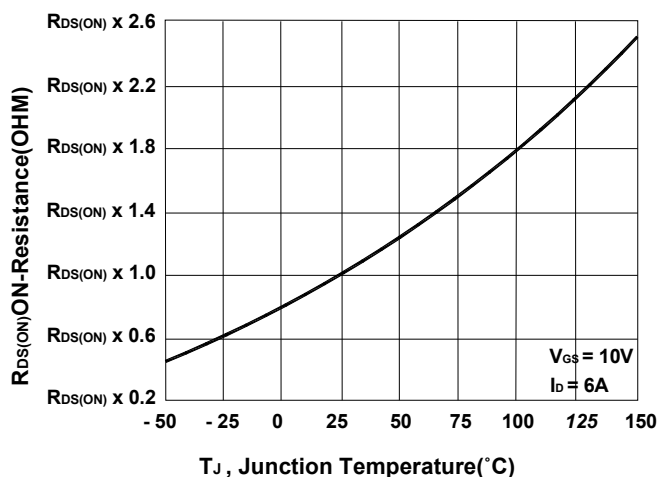


Capacitance Characteristic

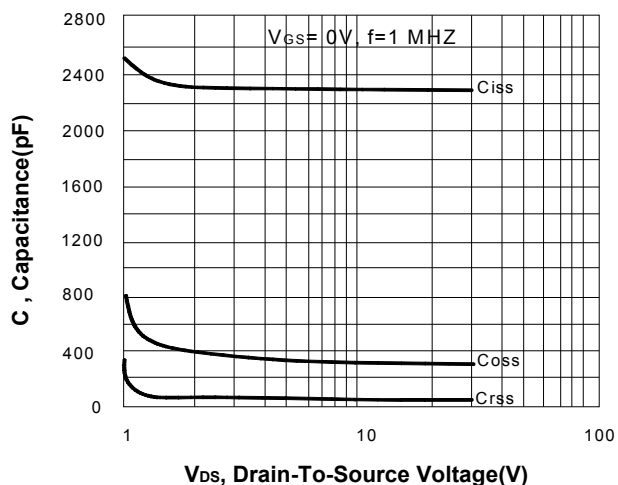


Gate charge Characteristics

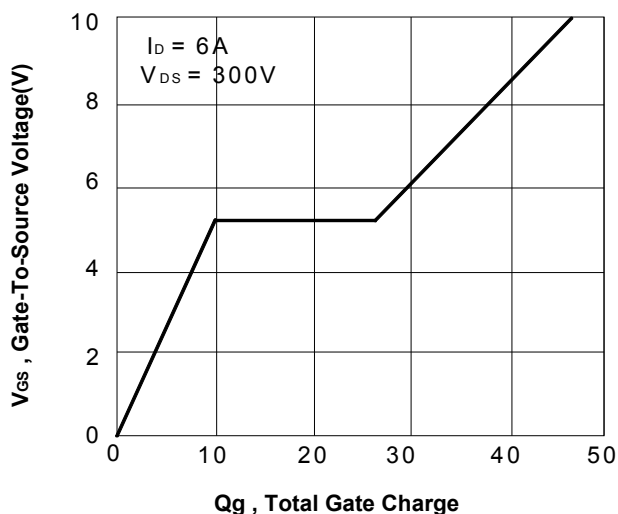


Source-Drain Diode Forward Voltage

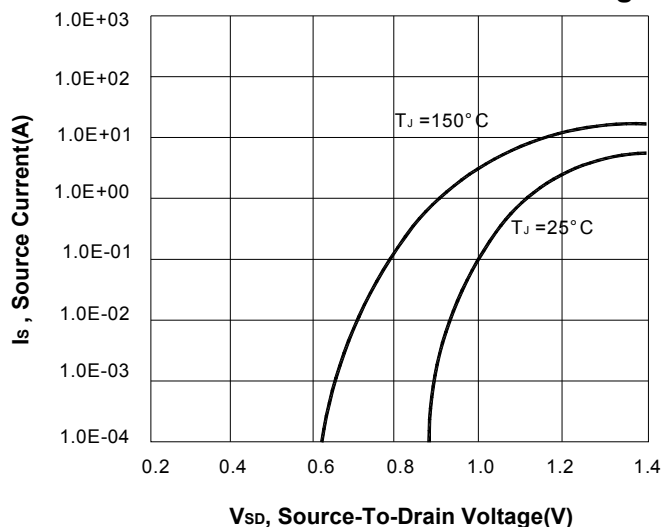

Safe Operating Area

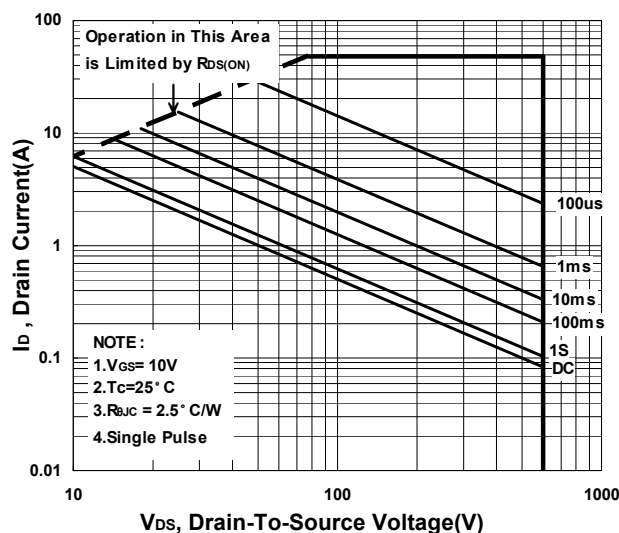

Single Pulse Maximum Power Dissipation

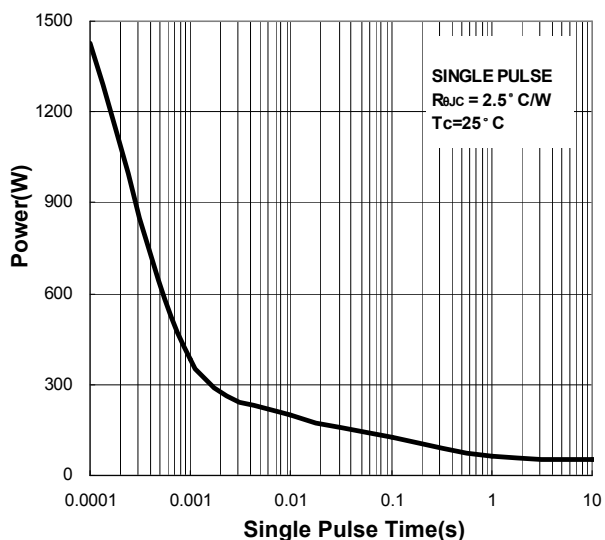

Transient Thermal Response Curve

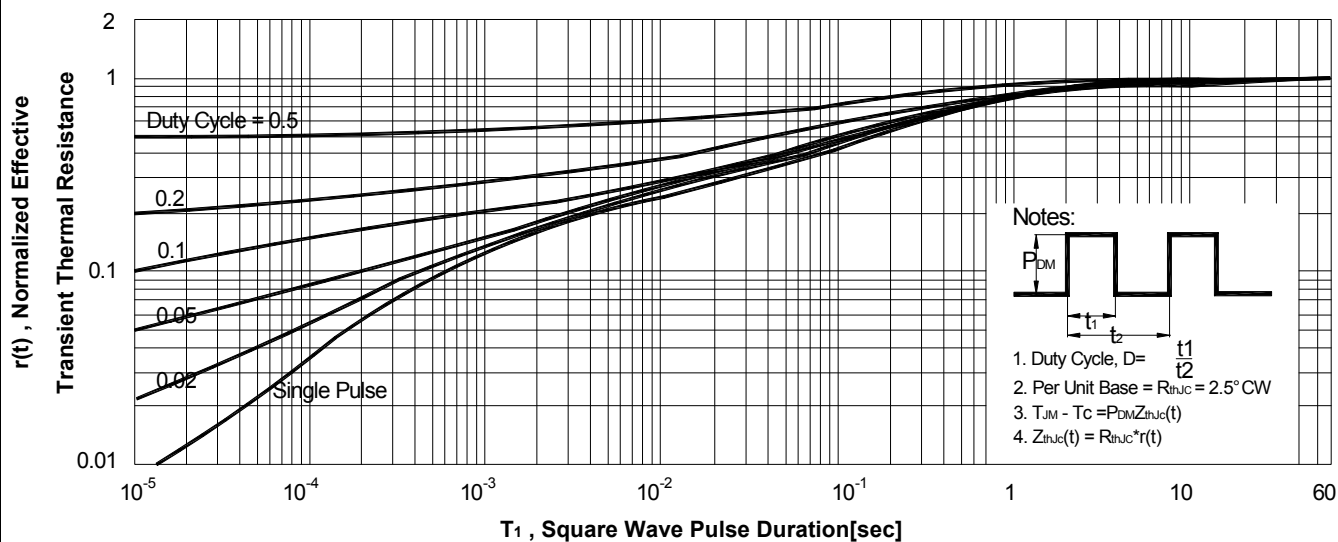


Figure 1
Gate Charge Test Circuit

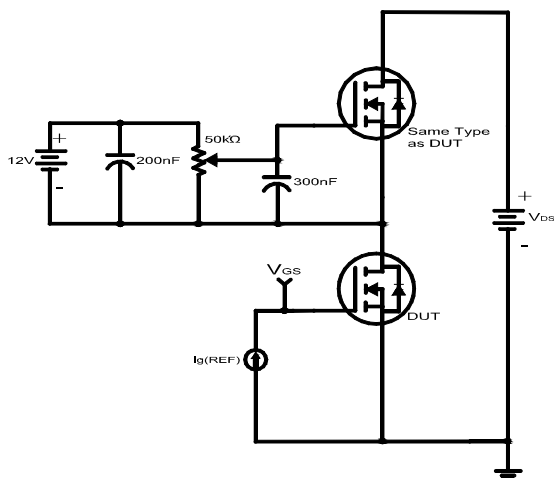


Figure 2
Gate Charge Waveforms

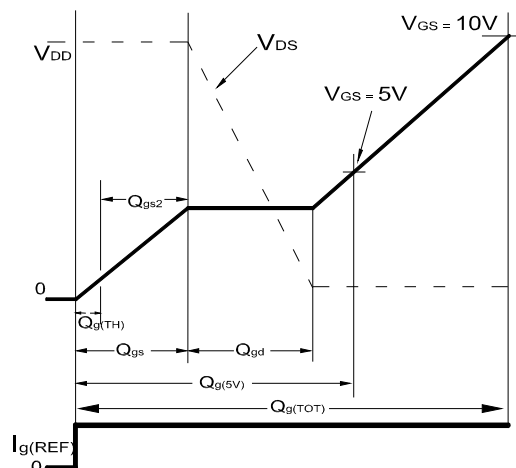


Figure 3
Switching Time Test Circuit

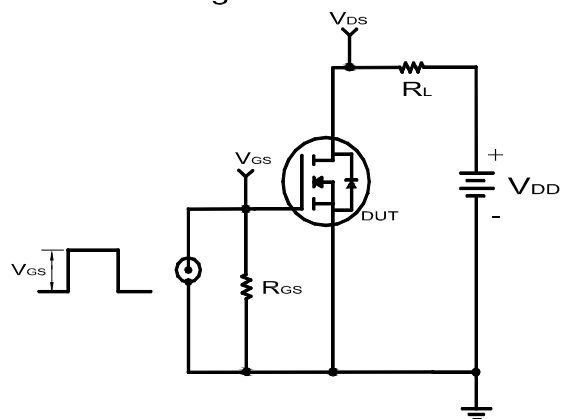


Figure 4
Switching Time Waveforms

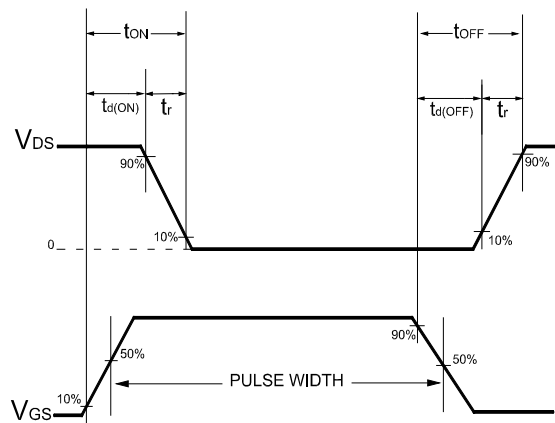


Figure 5
Unclamped Energy Test Circuit

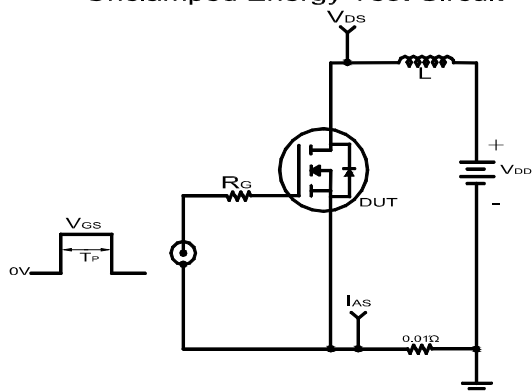


Figure 6
Unclamped Energy Waveforms

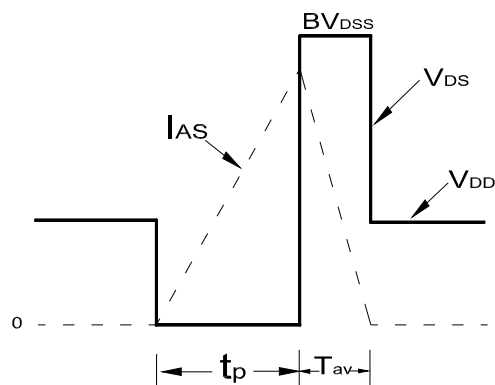


Figure 7
Diode Recovery Test Circuit



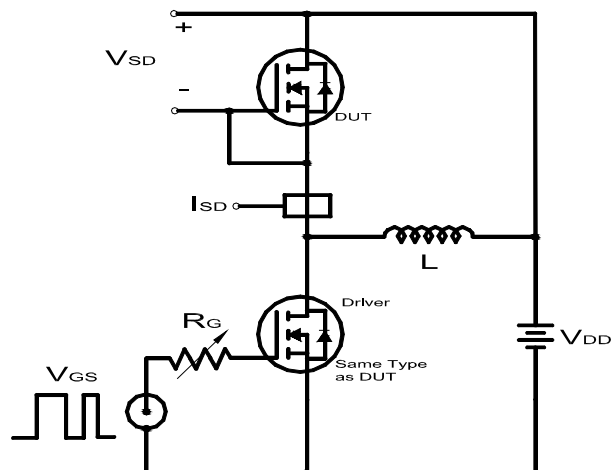


Figure 8
Diode Recovery Test Waveforms

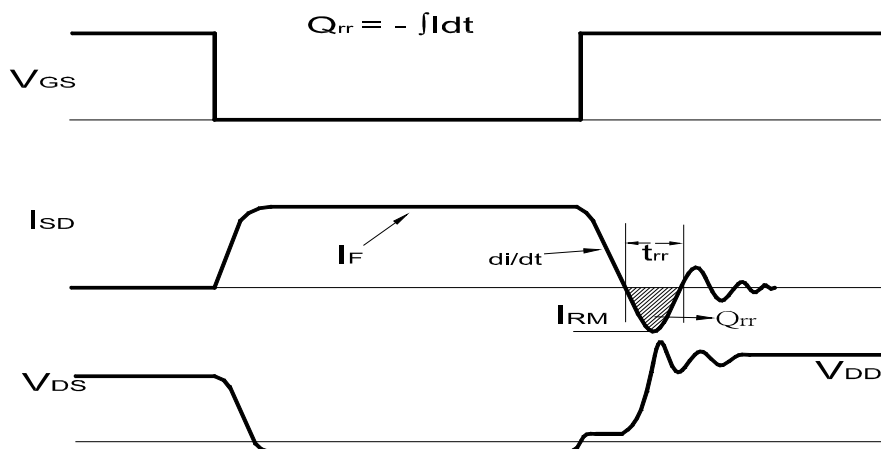

TO-220F (3-Lead) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	9.96	10.0	10.6	I	0.95	1.2	1.39
B	2.4	3.0	3.38	J	4.3	4.5	4.93
C	18.1	19.1	19.7	K	2.34		2.74
D	27.3	28.4	30	L	2.56		2.96
E	15.67		16.1	M	0.45		0.6
F	8.8	9.17	9.8	N		0.7	
G	0.5	0.75	0.91	O	2.8		3.4
H	2.3		2.74				

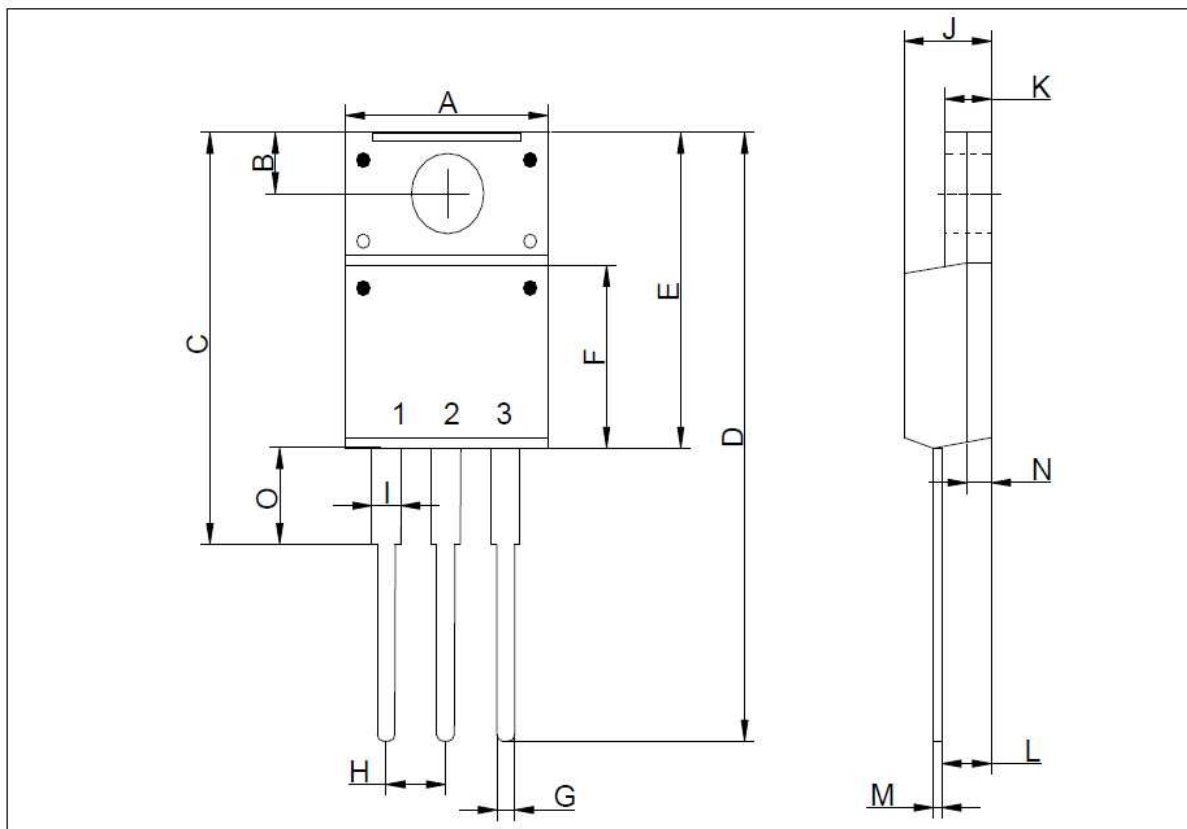

TO-220FS (3-Lead) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	9.96		10.36	I	1.15		1.39
B	3.1		3.5	J	4.53		4.93
C	17.55		18.95	K	2.34		2.74
D	28.04		28.84	L	2.56		2.96
E	15.67		16.07	M	0.45		0.60
F		9.17		N		0.7	
G	0.71		0.91	O	2.23		2.63
H		2.54					

