



P900

SPECIFICATIONS

- ♦ **Field proven rugged construction**
- ♦ **High overpressure capability**
- ♦ **High reliability for demanding environments**
- ♦ **Application specific customization**
- ♦ **Excellent media compatibility**
- ♦ **Shock and vibration resistant**

P900 Series Strain Gauge Pressure Transducers are premium grade sensors that provide highly precise measurement of absolute, vented gauge, or sealed gauge pressures over wide temperature ranges. Standard versions of this transducer use a 17-4 PH stainless steel diaphragm to sense pressure (Inconel versions are available for operation in highly corrosive environments). The deflection of the diaphragm is transferred to a double cantilever beam by a force transfer rod. Strain in the beam, and therefore, input pressure is measured by four foil strain gauges. An all-welded construction provides high reliability and stability. Capable of sensing extremely small changes of applied pressure, the transducers are relatively insensitive to vibration, attitude, and shock. The P900 Series Pressure Sensors are available in a range of electrical inputs and outputs. Zero and span potentiometers are available as a special option with the P940, P950, P960, and P990 models. Non-standard pressure ranges are available in all models of the P900 Series.

For parts requiring RoHS compliance, please contact factory.

FEATURES

- ♦ High Overload capability
- ♦ Operation in High Temperatures
- ♦ Shock and Vibration Resistant
- ♦ 2-wire, 4-20 mA option; Intrinsic Safety
Approval to E Exia IIC T4 ($T_{amb}=60^{\circ}\text{C}$)
BASEEFA, CENELEC EN50-020

APPLICATIONS

- ♦ Hydraulic Pressure Monitoring
- ♦ Torpedo Depth Sensing
- ♦ Vehicle Brake System Monitoring
- ♦ Military and Commercial Aircraft




PERFORMANCE SPECIFICATIONS

Series	P900	P910	P940	P950	P960	P970	P980	P990
Model Number	P901/904	P911/4	P941/4	P951/4	P961/4	P971/4	P981/4	P991/4
Input Voltage	10VDC (12 V max)	10VDC (12 V max)	10VDC	11- 18VDC	18- 32VDC	15- 36VDC	10-36VDC	±15VDC
Current Consumption(mA)	13	30	20	20	20	20	-	20
Full Range Output (±1%)	20mV	20mV	5VDC	2.5VDC	5VDC	10VDC	4-20mA	5VDC
Impedance (ohm)	1000 ±5%	350	<10	<10	<10	<10	Load Resist. 1300 max. at 36VDC	<10
Current (mA max)	-	-	5	5	5	5	-	5
Frequency Response	Approx. 2.5 kHz to 40 kHz for .7 bar	Approx. 2.5 kHz to 40 kHz for .7 bar	1 kHz	1 kHz	1 kHz	1 kHz	100 Hz	1 kHz
Combined Thermal – Zero & Sensitivity Shift								
% F.R.O./°F	±0.008	-	±0.008	±0.008	±0.008	±0.008	±0.008	±0.008
% F.R.O./°C	±0.015	±0.007	±0.015	±0.015	±0.015	±0.015	±0.015	±0.015
Residual Unbalance								
% F.R.O.	±1	±1	±1	±1	±1	±1	±1	±1
Weight oz (gm)								
Connector Version	4.4 (125)	4.4 (125)	5.1 (145)	5.1 (145)	5.1 (145)	5.1 (145)	5.1 (145)	5.1 (145)
Cable Version	5.6 (160)	5.6 (160)	6.3 (180)	6.3 (180)	6.3 (180)	6.3 (180)	6.3 (180)	6.3 (180)


COMMON SPECIFICATIONS

Pressure Ranges		
High	(Psi)	0-75, 100, 150, 200, 250, 350, 500, 750, 1000, 1500, 2200, 3500, 5000, 7500, 10,000
	(Bar)	0-8, 7, 10, 15, 25, 35, 50, 70, 100, 150, 200, 250, 350, 500, 700
Medium	Psi	0-10, 15, 20, 25, 35
	Bar	0-0.7, 1.0, 1.5, 1.7, 2.5
DIN	Bar	1, 1.6, 2.5, 4, 6, 10, 16, 25, 40, 60, 100, 160, 250, 400, 600
Pressure References		
High pressure range	Vented gauge: 0-75 to 0-350psi	
	Absolute and sealed gauge: 0-75 to 0-10 ksi	
Medium Pressure Range	Vented gauge and absolute: 0-10, 15, 20, 25, 35 psi (0-0.7, 1.0, 1.5, 1.7, 2.5 bar)	
Pressure Limit	5X Full range pressure or 12,000 psi (830 bar), whichever is less. Will not cause a zero offset exceeding 0.04 FRO (recoverable within a few hours)	
Burst Pressure	20 x full range pressure or 22,000 psi (1,520 bar), whichever is less	
Pressure Media	Liquids or gases compatible with 17-4 PH and 17-7 PH stainless steel or Inconel 625	
Shunt Calibration	80% $\pm$ 5% full range pressure (not fitted in P980 Series)	
Combined Non-linearity, Hysteresis and Non-repeatability	High Range: $\leq \pm 0.10\%$ F.R.O. (BSL); Medium Range: $\leq \pm 0.20\%$ F.R.O. (BSL)	
Operable Temperature	65°F to 250°F (-54°C to 120°C)	
	P91X: -65°F to 300°F (-54°C to 150°C)	
Compensated Temperature	32°F to 212°F (0°C to 100°C)	
	P91X: -65°F to 250°F (-54°C to 120°C) or -4°F to 176°F (-20°C to +80°C)	
Storage Temperature	-65°F to 300°F (-54°C to 150°C)	
Humidity	95% Relative Humidity	
Cable Version	Immersible to IP67 (fluid must not enter the ends of the cable)	
Acceleration Response	Above 500 psi (35 bar) $\pm 0.02\%$ F.R.O./g; below 500 psi (35 bar) $\pm 0.10\%$ F.R.O./g	
Vibration	Surpasses MIL STD810C Method 514-2 Curve L and EUROCAE ED 14A/RTCA 160A	
Shock	1000g for 5msec will not damage the sensor	
EMC	The P940, P950, P960 and P980 and P990 Series are CE marked, and when correctly installed comply with the EMC Directive 89/336/EEC Generic Standards for Residential Commercial, Light Industrial and Industrial environments. Note: The P980 Series when used in Intrinsic Safety applications does not comply with the Industrial environment directive.	
Insulation Resistance	500 M Ω at 50 Vdc at 25°C	
Total Thermal Error Band (P91X only)	-20°C to 80°C	$\leq \pm 0.4\%$ FRO Typical, $\leq \pm 0.6\%$ FRO Maximum
	-54°C to 120°C	$\leq \pm 0.7\%$ FRO Typical, $\leq \pm 1.0\%$ FRO Maximum

DIMENSIONS

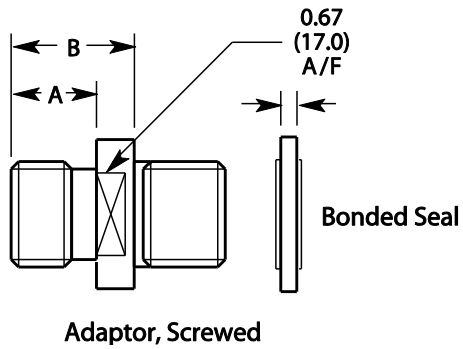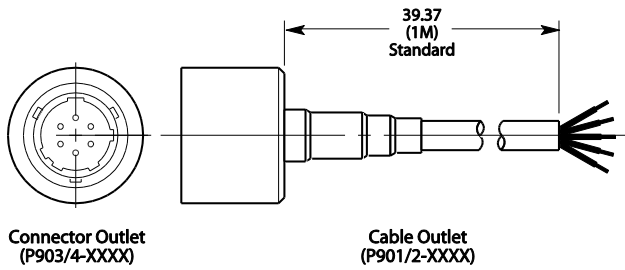

Connector:
MIL-C-26482,
Shell Size 10, 6 PIN

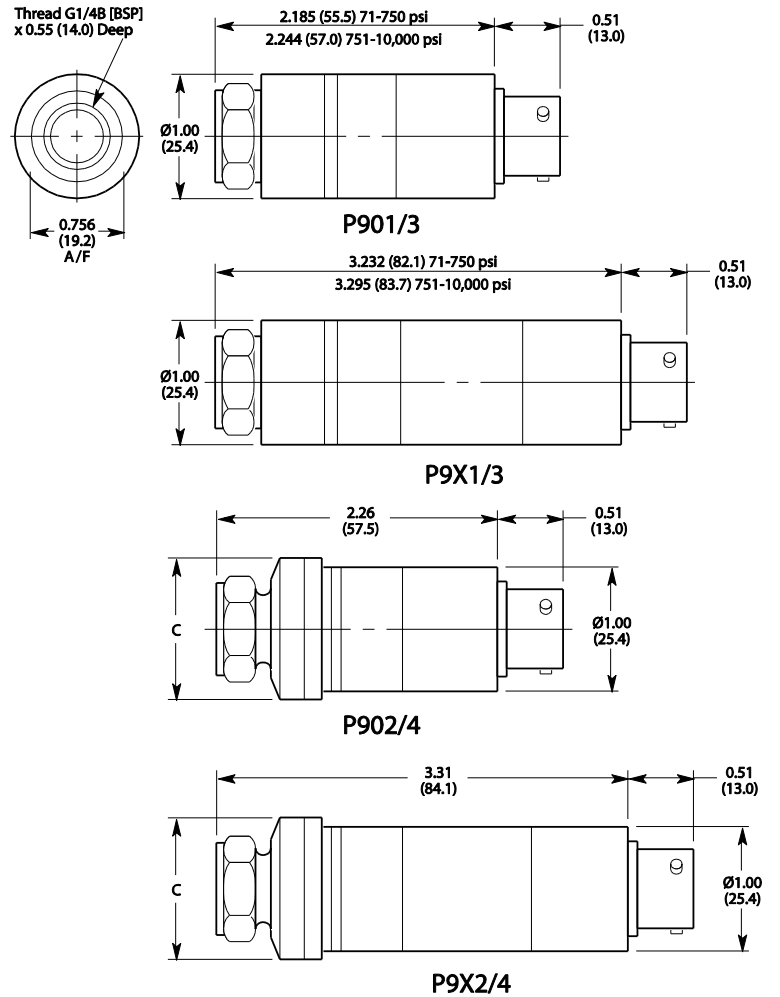

ADAPTERS

Code Thread Size	Dimensions in (mm)		
	Welded	A	B ¼" BSF (F)
G1/4A (BSP) (M)	0002	0.46 (11.7)	0.67 (16.9)
M14 x 1.5 (M)	0003	0.40 (10.2)	0.61 (15.4)
7/16"-20UNF-2A (M)	0004	0.56 (14.3)	0.77 (19.5)
¼"-18NPT (M)	0005	0.55 (14)	0.76 (19.2)
M10 x 1.0 (F)	0006	-	0.6 (15.2)
¼"-18NPT (F)	0009	-	0.76 (19.2)


Thread Size	Dimensions in (mm)		
	Screwed	A	B
G1/4A (BSP) (M)	0022	0.46 (11.7)	0.70 (17.8)
M14 x 1.5 (M)	0023	0.40 (10.2)	0.62 (15.8)
7/16"-20UNF-2A (M)	0024	0.56 (14.3)	0.78 (19.8)
¼"-18NPT (M)	0025	0.55 (14.0)	0.80 (20.4)
M10 x 1.0 (M)	0026	-	0.60 (15.2)

Range	Diameter C in (mm)
10 psi (0.7 bar)	1.143 (29.05)
15 psi (1.0 bar)	1.043 (26.50)
20psi (1.5 bar)	0.888 (22.50)
25 psi (1.7 bar)	0.807 (20.50)
35 psi (2.5 bar)	0.748 (19.00)

CONNECTIONS

Cable	Connector ²	
Red¹	Pin A ¹	Excitation (+)
White	Pin D	Excitation (-) ³
Yellow	Pin B	Output (+)
Blue^{1,3}	Pin C ^{1,2}	Output (-) ³
Violet	Pin E	80% shunt calibration ⁴
Grey	Pin F	

Connector Orientation

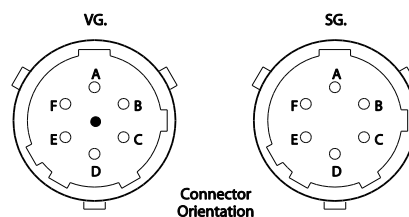


Note: Screen is connected to the case for CE marked units.
Screen is not connected to the case for optional IS units (P980).
IS certification revokes CE certification.


- 2-wire transmitter connections
- Vented gauge units must breathe through the receptacle
(mating connector must have a vent hole)
- 0 Volt P990 series
- Connected internally for P940, P950, P960 Series (3-wire)
- Shunt calibration not fitted to P980 Series

WIRING


P901/9, P910/9

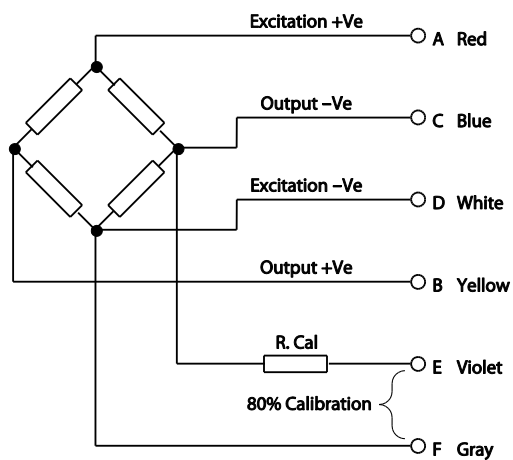


P991/9

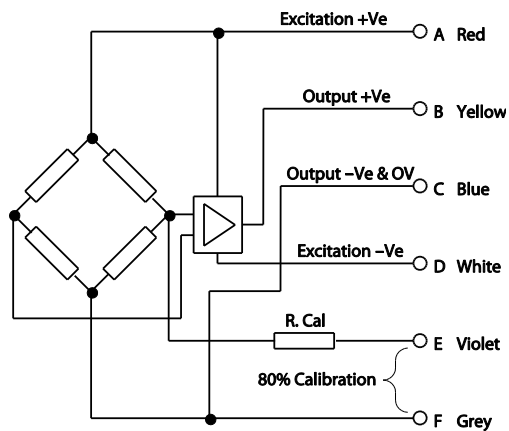

P981/9

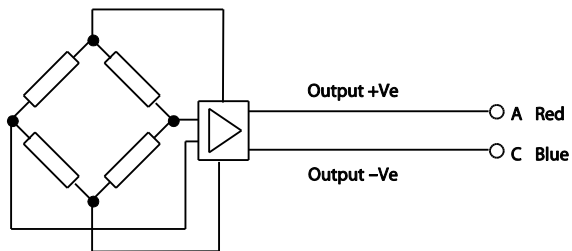

P941/9, P951/9, P961/9, P971/9

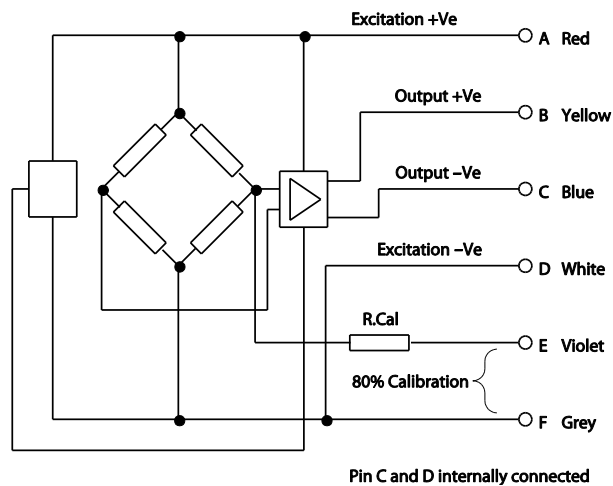

ORDERING INFORMATION

P9	0	3	-	0	0	0	4	-	100	PS	V	01
Model Name												
Output												
See 'Output Code'												
Connector Outlets												
1=High Range-Cable 2=Medium Range-Cable												
3=High Range-Connector												
4=Medium range-Connector												
6=High Range Cable (CR)												
7=Medium Range-Cable (CR)												
8=High Range-Connector (CR)												
9=Medium Range-Connector (CR)												
Standard/Special Pressure Range												
0=Standard 1=Non-Standard												
5=0-30mV (1kΩ bridge, P91X only)												
Certification												
0=Standard CE 1=Customer Special												
9=Intrinsically Safe												
Connection												
0=Welded 2=Screwed in												
Connector Type												
1=1/4" BSP Female 2=1/4" BSP Male 3=M14x1.5 Male												
4=7/16" 20 UNF2A Male 5=1/4"-18NPT Male 6=M10x1mm Arsero Ermeto Female												
9=1/4"-18 NPT Female												
Pressure Range												
See 'Pressure Range' Table												
Pressure Unit												
BA=bar PS=psi												
Pressure Type												
A=Absolute S=Sealed gage V=Vented Gage												
Cable Length												
Put Double Digit cable Length here. Max length: 20m												

NOTE:

1. For cable connection type, specify 2-digit length
2. For connector connection type, specify mating cable assembly 2-digit length (leave empty if no mating cable assembly is needed).
3. Max length: 20 meters
4. Add "0" (zero) in front of the single digit length
5. Vented gauge units must only be used in dry, noncorrosive environments and will breathe through the cable vent tube or hole in the 6-way receptacle. Otherwise the manufacturer's warranty is voided

Output Code	
Code	Output
0	0-20mV (1000Ω bridge, 10V supply)
1	0-20mV (350Ω bridge, 10V supply)
4	0-5V _{OUT} ; V _{SUPPLY} =10V
5	0-2.5V _{OUT} ; V _{SUPPLY} =11-18V
6	0-5V _{OUT} ; V _{SUPPLY} =18-32V
7	0-10V _{OUT} ; V _{SUPPLY} =15-36V
8	4-20mA _{OUT} ; V _{SUPPLY} =10-36V
9	0-5V _{OUT} ; V _{SUPPLY} =±15V

Pressure Range		
High	PSI	0-75, 100, 150, 220, 250, 350, 500, 750, 1000, 1500, 2200, 3500, 5000, 7500, 10,000
	BAR	0-5, 7, 10, 15, 25, 35, 50, 70, 150, 200, 250, 350, 500, 700
DIN	BAR	4, 6, 10, 16, 25, 40, 60, 100, 160, 250, 400, 600
Medium	PSI	0-10, 15, 20, 25, 35
	BAR	0.7, 1.0, 1.5, 1.7, 2.5
DIN	BAR	1, 1.6, 2.5

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Phone: 800-522-6752
Email: customercare.fmt@te.com

EUROPE

Measurement Specialties (Europe), Ltd.,
a TE Connectivity Company
Phone: 800-440-5100
Email: customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Phone: 0400-820-6015
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[P981-0107-350BAS15](#) [P983-0005-250BAS](#)