



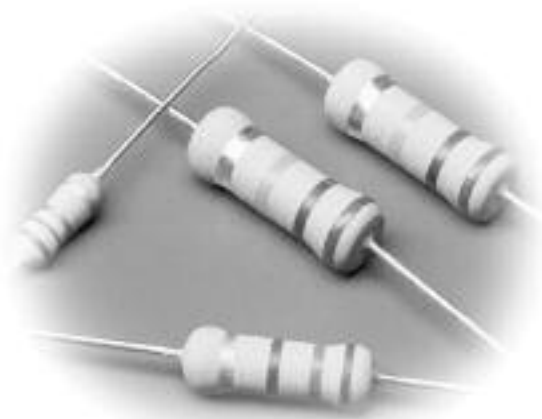

features

- KOA original bulk ceramic resistors
- Coated with UL94V0 flameproof material
- Excellent in anti-pulse characteristics
- Non-inductive resistors
- Marking: Light green body color with color-coded bands
- Products with lead-free terminations meet EU RoHS requirements
- Higher reliability against disconnection compared to wirewound resistors and film resistors

dimensions and construction

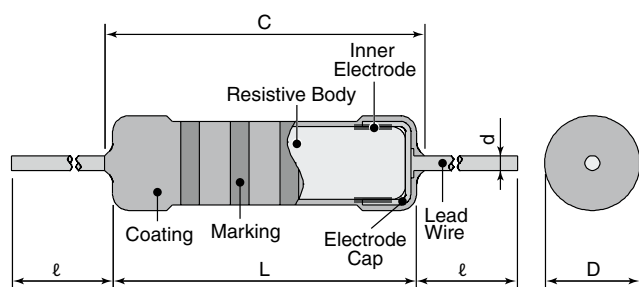

Type	Dimensions inches (mm)				
	L	C (max.)	D	d (nom.)	I*
PCF1/2	.354±.039 (9.0±1.0)	.437 (11.1)	.138±.02 (3.5±0.5)	.028 (0.7)	1.18±.118 (30.0±3.0)
PCF1	0.65±.039 (16.5±1.0)	.748 (19.0)	.217±.039 (5.5±1.0)	.031 (0.8)	1.50±.118 (38.0±3.0)
PCF2	.748±.039 (19.0±1.0)	.886 (22.5)	.276±.039 (7.0±1.0)		

* Lead length changes depending on taping type

ordering information

Part #	PCF	1	C	T631	R	103	K
Type	PCF	Power Rating	Termination Material	Taping	Packaging	Nominal Resistance	Tolerance
	PCF	1/2: 0.5W 1: 1W 2: 2W	C: SnCu	1/2: T52 1: T631 2: T631	R: Reel	2 significant figures + 1 multiplier	K: ±10% M: ±20%

For further information on packaging, please refer to Appendix C.


applications and ratings

Part Designation	Power Rating @ 70°C	Minimum Dielectric Withstanding Voltage	Resistance Range E-12 (±10%) E-6 (±20%)	Resistance Tolerance	T.C.R. (ppm/°C)	Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Absolute Maximum Pulse Voltage*	Rated Ambient Temp.	Operating Temp. Range
PCF1/2	0.5W	500V	4.7Ω - 100KΩ	K: ±10% M: ±20%	-900±300: R<100Ω	200V	400V	10kV	+70°C	-40°C to +200°C
PCF1	1.0W		3.3Ω - 390KΩ		-1300±300: R≥100Ω	300V	600V	14kV		
PCF2	2.0W	700V				400V	800V	20kV		

* Resistance to pulse: change shall be ±5% of the pre-test values. 1 sec. ON, 1 second OFF, 10,000 cycles. The voltage is applied with maximum pulse voltage.


environmental applications

Derating Curve

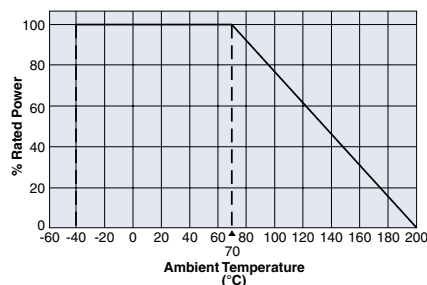

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$		Test Method		
	Limit	Typical			
Resistance	Within regulated to tolerance	—	Resistance	Measurement voltage	25°C
			3.3Ω=<R<10Ω	0.3V	
			10Ω=<R<100Ω	1.0V	
			100Ω=<R=<390kΩ	3.0V	
T.C.R	-900±300x10 ⁻⁶ /K: R<100Ω -1300±300x10 ⁻⁶ /K: R≥100Ω	—	+25°C/-40°C, +25°C/+75°C and +25°C/+125°C		
Voltage Coefficient (Apply for over 1kΩ)	0~0.2%/V	—	Rated voltage and rated voltage x 10%		
Overload	2%	0.4%	Rated voltage x 2.5 or maximum overload voltage for 5s, whichever less		
Resistance to pulse	5%	—	The resistor mounted to the test circuit as below. 1 sec. ON and 1 sec. OFF. 10,000 cycles. The voltage is applied with maximum pulse voltage. 		
Resistance to soldering heat	2%	0.8%	350°C±10°C, 3.5s±0.5s		
Rapid change of temperature	2%	0.4%	-40°C (30 min.)/+85°C (30 min.), 5 cycles		
Moisture resistance	5%	0.6%	40°C±2°C, 90%~95%RH, 1000 hours, 1.5h ON/0, 5h OFF cycles		
Load life	5%	0.4%	70°C±3°C, 1000h, 1.5h ON/0, 5h OFF cycles		
Resistance to Solvent	No abnormality in appearance. Marking shall be easily legible.	—	Dipping in IPA or Xylene for 3 minutes and leaving for 10 minutes after removing drops, then brushing 10 times.		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KOA Speer:

[PCF1L562K](#) [PCF2L103K](#) [PCF2L101K](#) [PCF2L220K](#) [PCF1L101K](#) [PCF1L103K](#) [PCF1L102K](#) [PCF2L150K](#)
[PCF1/2C103K](#) [PCF1/2C513K](#) [PCF1/2L103K](#) [PCF1/2L513K](#) [PCF1C101K](#) [PCF1C270K](#) [PCF1C472K](#) [PCF1C562K](#)
[PCF1C5R6K](#) [PCF1CT631R102K](#) [PCF1CT631R152K](#) [PCF1CT631R270K](#) [PCF1LT631R102K](#) [PCF1LT631R152K](#)
[PCF2C101K](#) [PCF2C183K](#) [PCF2C270K](#) [PCF2C273K](#) [PCF2C330K](#) [PCF2C391K](#) [PCF2C6R8K](#) [PCF2CT631R100K](#)
[PCF2CT631R102K](#) [PCF2CT631R150K](#) [PCF2CT631R330K](#) [PCF2CT631R3R3K](#) [PCF2CT631R4R7K](#)
[PCF2CT631R562K](#) [PCF2L330K](#) [PCF2L6R8K](#) [PCF2LT631R100K](#) [PCF2LT631R150K](#) [PCF1/2CT52R102K](#)
[PCF1CT631R274K](#) [PCF1C4R7K](#) [PCF2CT631R470K](#) [PCF1L330K](#) [PCF2L102K](#) [PCF2L104K](#) [PCF1L472K](#)
[PCF1L390K](#) [PCF2L270K](#) [PCF2CT631R151K](#) [PCF1C330K](#) [PCF2CT631R560K](#) [PCF2CT631R270K](#) [PCF1/2C102K](#)
[PCF1C100K](#) [PCF1C102K](#) [PCF1C103K](#) [PCF1C104K](#) [PCF1C120K](#) [PCF1C121K](#) [PCF1C122K](#) [PCF1C151K](#)
[PCF1C152K](#) [PCF1C153K](#) [PCF1C180K](#) [PCF1C181K](#) [PCF1C182K](#) [PCF1C183K](#) [PCF1C220K](#) [PCF1C221K](#)
[PCF1C222K](#) [PCF1C223K](#) [PCF1C271K](#) [PCF1C272K](#) [PCF1C273K](#) [PCF1C331K](#) [PCF1C390K](#) [PCF1C391K](#)
[PCF1C392K](#) [PCF1C393K](#) [PCF1C3R3K](#) [PCF1C3R9K](#) [PCF1C470K](#) [PCF1C471K](#) [PCF1C473K](#) [PCF1C560K](#)
[PCF1C561K](#) [PCF1C680K](#) [PCF1C681K](#) [PCF1C682K](#) [PCF1C6R8K](#) [PCF1C820K](#) [PCF1C821K](#) [PCF1C822K](#)
[PCF1C823K](#) [PCF1C8R2K](#) [PCF2C100K](#) [PCF2C102K](#) [PCF2C103K](#)