



PET-7067

8-Channel Power Relay Output Module with PoE

Relay Output

Features

- IEEE 802.3af-compliant Power over Ethernet (PoE)
- Built-in Web Server
- Communication Security
- Modbus/TCP Protocol
- 2-way Isolation/ESD Protection
- Built-in Dual Watchdog
- 10/100 Base-TX Ethernet
- I/O Pair Connection
- DO Type: 8 Power Relay (Form A)



Introduction

Power over Ethernet (PoE) allows power and data to be carried over a single Ethernet cable, so a device can operate solely from the power it receives through the data cable. This innovation allows greater flexibility in office design, higher efficiency in systems design, and faster turnaround time in set-up and implementation.

The PET-7067 feature true IEEE 802.3af-compliant (classification, Class 1) Power over Ethernet (PoE) using both Ethernet pairs (Category 5 Ethernet cable).

The PET-7067 can receives power from an auxiliary power sources like AC adapters and battery in addition to the PoE enabled network. This is a desirable feature when the total system power requirements exceed the PSE's load capacity. Furthermore, with the auxiliary power option, the PET-7060 can be used in a standard Ethernet (non-PoE) system.

The PET-7067, a web-based PoE Ethernet I/O module, features a built-in web server, which allows configuration, I/O monitoring and I/O control by simply using a regular web browser. Besides, with the web HMI function, no more programming or HTML skills are needed; creating dynamic and attractive web pages for I/O monitoring and I/O control would be fun to engineers ever after. The PET-7067 offers easily and safely access for users from anytime and anywhere! In addition, the PET-7067 also supports Modbus/TCP protocol that makes perfect integration for PET-7067 to SCADA servers.

The PET-7067 provides 8 power relay (form A) output channels. Each power relay supports contact rating as 5 A @ 250 V_{AC} or 5 A @ 30 V_{DC}.

Applications

Building Automation, Factory Automation, Machine Automation, Remote Maintenance, Remote diagnosis, Testing Equipment.

System Specifications


System		
CPU	80186 CPU (80 MHz)	
SRAM	512 KB	
Flash Memory	512 KB	
EEPROM	16 KB	
Dual Watchdog	Yes	
Communication		
PoE Ethernet Port	10/100 Base-TX (With link, activity led indicator) and auto MDI/MDI-X connection	
2-Way Isolation		
Ethernet	1500 V _{rms}	
I/O	DI	3750 V _{rms}
	Relay Output	3000 V _{rms}
LED Indicators		
PoE	PoE On	
L1	Run	
L2	Link/Act	
L3	10/100M	
Power Requirements		
IEEE 802.3af	Class 1	
Required Supply Voltage	Powered by Power over Ethernet (PoE) or auxiliary power +12 V _{DC} ~ +48 V _{DC} (non-regulated)	
LED Indicator	Yes	
Power Consumption	0.14 A @ 24 V _{DC} Max.	
Mechanical		
Dimensions (W x H x D)	72 mm x 123 mm x 35 mm	
Installation	DIN-Rail or Wall mounting	
Environment		
Operating Temperature	-25 °C ~ +75 °C	
Storage Temperature	-30 °C ~ +80 °C	
Humidity	5 ~ 90% RH, non-condensing	

I/O Specifications

Relay Output	
Output Channels	8
Output Type	Power Relay, Form A (SPST N.O.)
Operating Voltage Range	250 V _{AC} /30 V _{DC}
Max. Load Current	5.0 A/channel at 25 °C
Operate Time	6 ms
Release Time	3 ms
Electrical Life (Resistive Load)	5A 250 V _{AC} / 30,000 ops (10 ops/minute) at 75 °C
	5A 30 V _{DC} 70,000 ops (10 ops/minute) at 75 °C
UL	5A 250 V _{AC} /30 V _{DC} 6,000 ops.
	3A 250 V _{AC} /30 V _{DC} 100,000 ops.
Mechanical Life	20,000,000 ops. at no load (300 ops./minute)

Pin Assignment

Terminal No.	Pin Assignment
E1	RJ-45
01	RL6 NO
02	RL6 COM
03	RL7 NO
04	RL7 COM
05	N/A
06	N/A
07	N/A
08	(R)+Vs
09	(B)GND

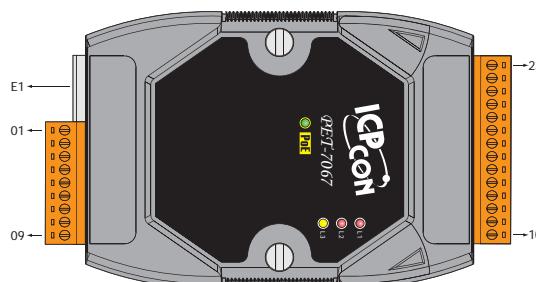


Terminal No.	Pin Assignment
23	RL5 COM
22	RL5 NO
21	RL4 COM
20	RL4 NO
19	RL3 COM
18	RL3 NO
17	RL2 COM
16	RL2 NO
15	RL1 COM
14	RL1 NO
13	RL0 COM
12	RL0 NO
11	N/A
10	N/A

Wire Connection

Digital Output	Readback as 1	Readback as 0
	Relay On	Relay Off
Relay Output	 RLx.COM AC/DC LOAD RLx.NO Relay Close To other channels	 RLx.COM AC/DC LOAD RLx.NO Relay Open To other channels

Dimensions (Unit: mm)

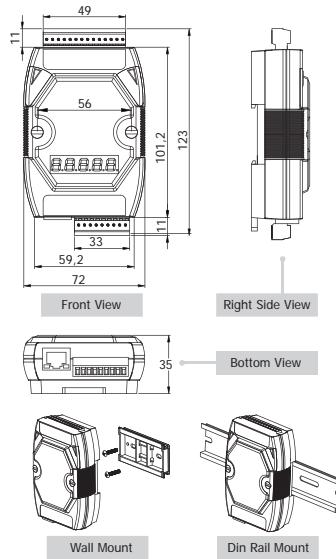

Ordering Information

PET-7067 CR 8-Channel Power Relay Output Module with PoE (RoHS)

Accessories

NS-205PSE CR	Industrial 5-Port PoE Ethernet Switch (RoHS)
MDR-60-48	24V/1.25A, 60 W Power Supply with DIN-Rail Mounting

Related Products

Converters	USB, RS-232, Fiber Optical to RS-485 Converters and Repeaters
Power Supply	24 V _c Power Supply
Relay Module	External Relay Modules for ET-7000 DO Module

Learning Kit	Starter Learning Kit
Application Books	Application Books Designed with Our Products
Data Logger Software	User Friendly Data Logger Software (free)