

PHR-12350

12 Volt 98 AH @ 20-hr. rate
340 W/Cell @ 15-min. rate


Rechargeable Sealed Lead Acid Battery
PHR HIGH RATE SERIES



We've Got The Power.™



Physical Dimensions: in (mm)

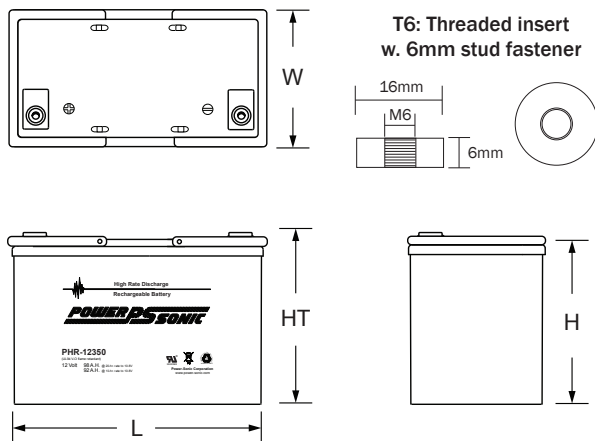

L: 11.97(304) W: 6.61(168) H: 8.19(208) HT: 9.12(229)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions.

Features

- Superb high-rate discharge characteristics that ensure reliable performance in UPS applications for up to 10 years. UL recognized
- Flame retardant ABS case and cover to UL 94 V-0 for superior performance
- VRLA Absorbent Glass Mat (AGM) Technology guarantees safe operation without maintenance and "non-restricted article" status for transportation. Approved for transport by air. D.O.T., I.A.T.A. and F.A.A. certified.
- Precision plate pasting for higher consistency with 100% load testing to ensure uniform capacity
- Patented dual-paste process for enhanced active material bonding, and computer guided volumetric electrolyte control for precision filling
- Lead-calcium alloy grids and the use of high purity lead account for superior shelf-life characteristics

Performance Specifications

Nominal Voltage12 volts (6 cells)

Nominal Power (15 min.) 340 W/Cell

Rated Capacity

20-hr.	(4.9A to 10.50 volts)	98.0 AH
10-hr.	(9.2A to 10.50 volts)	92.0 AH
8-hr.	(11A to 10.20 volts)	88.0 AH
5-hr.	(15.8A to 10.20 volts)	79.0 AH
1-hr.	(55.2A to 9.00 volts)	55.2 AH
15-min.	(168A to 9.00 volts)	42.0 AH

Approximate Weight 68.7 lbs. (31.2 kg)

Internal Resistance (approx.) 6.5 milliohms

Max Discharge Current (5 Sec.) 720 amperes

Max Short-Duration Discharge Current (0.1 Sec.) 1800 amperes

Charging Voltage @ 77 °F (20 °C)

Standby Use 2.275 ± 0.025 V/Cell, (-3.3mV/°C/Cell)

Cycle Use 2.45±0.05 V/Cell, (-5 mV / °C/Cell)

Maximum Charging Current 27.0 A

Case Flame Retardant ABS Plastic (UL 94 V-0)

Constant Current Discharge (Amperes) at 25°C

Constant Power Discharge (Watts/Cell) at 25°C (Blue)

PHR-12350	5 min	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V	185.29	148.61	128.39	107.49	85.46	64.69	52.90	30.83	23.09	19.00	15.91	13.92	11.16	9.63	5.14
1.80V	248.77	189.90	155.19	126.99	100.75	75.21	59.22	33.04	24.86	20.11	16.90	14.81	11.82	9.94	5.33
1.75V	280.44	208.69	169.51	136.67	104.68	78.02	62.02	34.36	25.85	20.88	17.35	15.25	12.15	10.21	5.46
1.70V	308.87	227.47	181.01	143.55	108.89	81.11	63.99	36.24	27.18	21.77	18.34	16.02	12.71	10.61	5.59
1.67V	333.73	243.11	191.56	152.07	114.58	82.96	65.89	37.45	28.20	22.58	18.84	16.52	13.11	10.87	5.75
1.65V	340.54	245.56	192.52	152.53	114.92	83.21	66.09	37.57	28.29	22.65	18.89	16.57	13.15	10.91	5.77
1.60V	375.59	266.55	205.85	162.49	121.24	86.72	68.48	38.56	29.06	23.09	19.34	16.90	13.37	11.16	5.86
1.85V	338.78	274.56	239.67	202.48	162.77	124.18	102.01	60.44	45.52	37.46	31.60	27.73	22.32	19.23	10.29
1.80V	450.03	346.80	285.69	235.88	189.15	143.41	113.80	64.53	48.73	39.55	33.37	29.28	23.42	19.89	10.63
1.75V	496.59	374.97	308.28	251.31	194.76	147.34	118.43	66.85	50.38	40.77	34.03	30.05	24.20	20.33	10.88
1.70V	531.65	399.42	324.56	262.12	201.50	152.67	121.80	70.27	53.03	42.54	35.91	31.49	25.19	21.10	11.16
1.67V	566.38	422.77	340.67	275.60	210.27	154.59	124.65	72.15	54.75	43.95	36.79	32.39	25.89	21.59	11.46
1.65V	577.94	427.04	342.38	276.43	210.90	155.05	125.03	72.37	54.91	44.08	36.90	32.48	25.96	21.66	11.49
1.60V	622.74	453.14	360.20	291.16	221.00	160.81	128.67	73.92	56.02	44.97	37.68	33.04	26.41	22.10	11.71