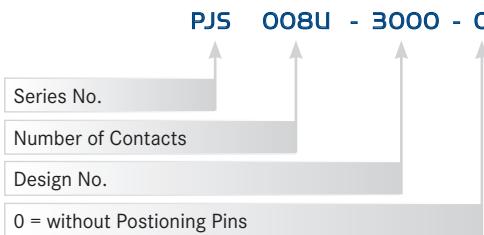



SPECIFICATIONS

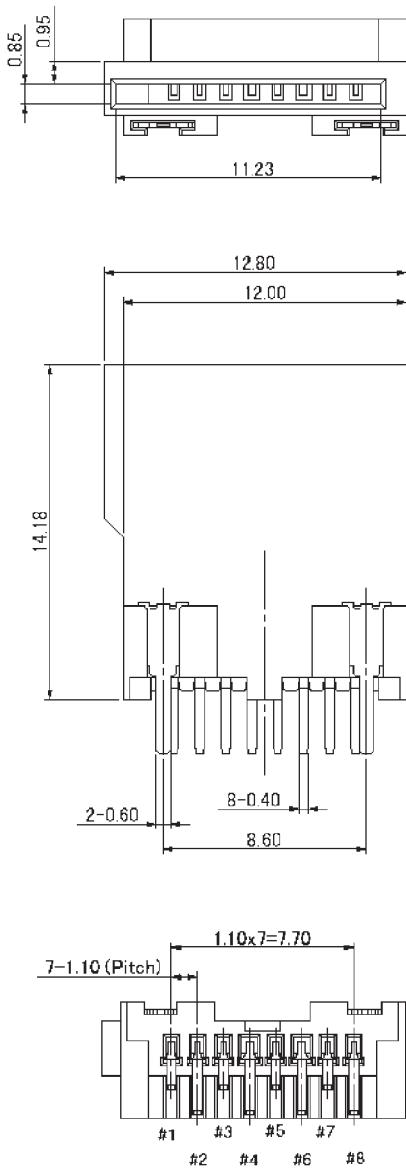
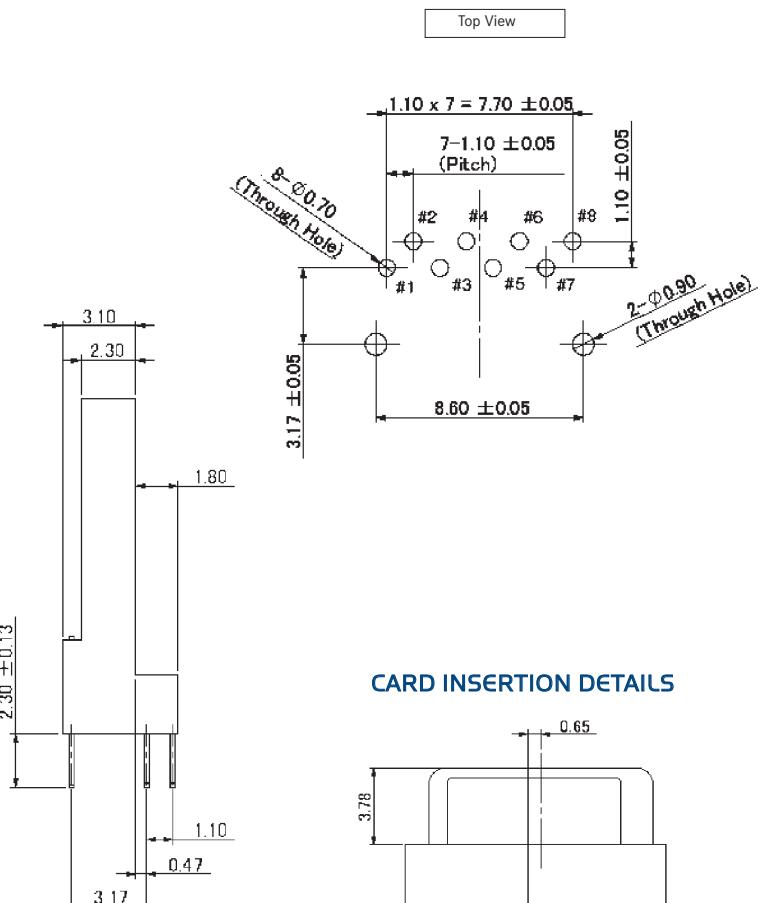
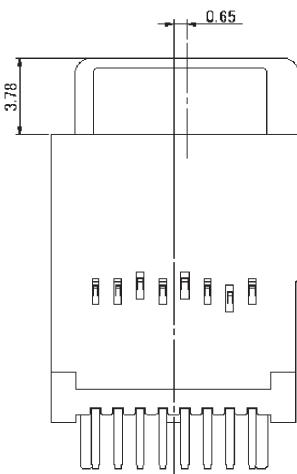
Insulation Resistance:	1,000MΩ min. at 250V DC
Withstanding Voltage:	250V AC rms for 1 minute
Contact Resistance:	100mΩ at 1mA / 20mV max.
Voltage Rating:	50Vrms AC
Current Rating:	0.5A
Operating Temp. Range:	-25°C to +85°C
Mating Cycles:	10,000 times, insertion / extraction

PART NUMBER

MATERIALS AND FINISH

Insulator:	LCP
DIP Terminals:	Brass, Plating Ni / Tin
Contacts:	PB, Plating Ni-Au / Tin


FEATURES

- Vertical insertion
- Small board space
- Robust dip soldering terminal
- Sequential mating / unmating contacts
- RoHS2011/65/EU

OUTLINE DIMENSIONS FOR PJS008U-3000-0

RECOMMENDED PCB LAYOUT

CARD INSERTION DETAILS


Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Yamaichi Electronics:](#)

[PJS008U-3000-0](#)