



# PLED200W Series– Fixed Output & Dimmable Flicker-Free LED Drivers Constant Current & Constant Voltage with Isolation Black Magic Thermal Advantage™ Aluminum Housing

## Electrical Specifications

Input Voltage Range:	100-277 Vac Nom. (90-305 V Min/Max)
Input Over-Voltage:	Can endure 320Vac for 48 Hrs, 350Vac for 2 Hrs
Frequency:	50/60 Hz Nom. (47-63 Hz Min/Max)
Power Factor:	>0.90 @ > 70% load, 120-277V
Inrush Current:	<60.0 Amps max @ 277Vac, cold start, full load
Input Current:	0.96 Amps max @ 230Vac, 1.82 A max @ 120Vac
Maximum Power:	200W
Current Accuracy:	± 3% Over input line variation
Load Regulation:	± 4%
THD:	≤ 20% @ > 70% load, 120-277V
Ripple & Noise: (Vpk-pk)	5% Vo max @ 20 MHz BW, Full load output in parallel with 0.1 µF ceramic & 10 µF Electrolytic
Ripple: (Ipk-pk)	5% Io max @ 20 MHz BW, Full load output in parallel with 0.1 µF ceramic & 10 µF Electrolytic. 120 Hz component (Flicker Free)
Start-up Time:	150mS typical @ Full Load, 120Vac/60Hz (1000mS max)
Leakage Current:	0.68 mA max @ 120Vac, 0.75 mA max @ 277Vac
Hold Up Time:	30mS typical @ Full Load, 277Vac
Protection:	Over-Voltage, Over-Current, and Short Circuit (auto-recovery)

## Environmental Specifications

Minimum Starting Temp:	-30°C
Maximum Case Temp.	90°C
UL Type TL Rating:	Non-Class 2: 90/84°C
Storage Temperature:	-40°C to +85°C
Humidity:	5% to 95%
Cooling:	Convection
Vibration Frequency:	5 to 55 Hz/2g, 30 minutes
Sound Rating:	Class A
MTBF:	280,000 Hours at full load and 40°C ambient conditions per MIL-217F Notice 2
EMC:	FCC 47CFR Part 15 Class B compliant
Impact Resistance:	1g/s
Weight:	33.2 oz (940 grams)

### Ordering Options:

- D: 0-10V & Resistance dimmable models dim 100-10%. Two extra wires on the output side (+Purple/-Gray). Compatible with most quality 0-10V wall dimmers. See page 3.
- D3: 3-wire dimmable models dim 100-10%. Three extra wires on the output side (Yellow/Purple/Gray). Compatible with potentiometer dimming. See page 3.
- PD: PWM Dimmable models. Two extra wires on the output side(+Purple/-Gray). Dims via positive 10% to 100% Duty Cycle, 200Hz to 1KHz, 0-10V Pulse. See page 4.



- Total Power: 200 Watts
- Input Voltage: 100-277 Vac Nom.
- UL Dry & Damp Location Rated
- IP66 & NEMA6
- UL Type HL Rated for Hazardous Locations
- UL Sign Components Manual (S.A.M. Models)

### Constant Current Versions - Product Specifications

Model Number	Output Current (mA ±5%)	Output Voltage Range (Vdc)	Max Output Power (W)	Typical Efficiency
PLED200W-445-C0450-XX	450	149-445	200W	92%
PLED200W-285-C0700-XX	700	95-285	200W	92%
PLED200W-190-C1050-XX	1050	64-190	200W	91%
PLED200W-142-C1400-XX	1400	48-142	200W	91%
PLED200W-114-C1750-XX	1750	38-114	200W	91%
PLED200W-095-C2100-XX	2100	32-95	200W	91%
PLED200W-081-C2450-XX	2450	27-81	200W	90%
PLED200W-071-C2800-XX	2800	24-71	200W	90%
PLED200W-063-C3150-XX	3150	21-63	200W	90%
PLED200W-057-C3500-XX	3500	19-57	200W	90%
PLED200W-047-C4200-XX	4200	16-47	200W	89%
PLED200W-040-C4900-XX	4900	14-40	200W	89%
PLED200W-035-C5600-XX	5600	12-35	200W	89%
PLED200W-032-C6300-XX	6300	11-32	200W	88%
PLED200W-024-C8330-XX	8330	8-24	200W	88%

-XX indicates dimming options are available. See options at left. Blank = fixed current output

### Constant Voltage Versions - Product Specifications

Model Number	Output Voltage (Vdc ±5%)	Output Current Range (mA)	Max Output Power (W)	Typical Efficiency
PLED200W-024	24	2083-8330	200W	88%
PLED200W-032	32	1575-6300	200W	88%
PLED200W-035	35	1400-5600	200W	89%
PLED200W-040	40	1225-4900	200W	89%
PLED200W-047	47	1050-4200	200W	89%
PLED200W-057	57	875-3500	200W	90%
PLED200W-063	63	788-3150	200W	90%
PLED200W-071	71	700-2800	200W	90%
PLED200W-081	81	613-2450	200W	90%
PLED200W-095	95	525-2100	200W	91%
PLED200W-114	114	438-1750	200W	91%
PLED200W-142	142	350-1400	200W	91%
PLED200W-190	190	163-1050	200W	91%
PLED200W-285	285	175-700	200W	92%
PLED200W-445	445	113-450	200W	92%

• Indicates S.A.M.








**Note:**  
LED drivers are designed and intended to operate LED loads only. Non-LED loading may be outside the specified design limits of our LED drivers, and therefore cannot be covered by any warranty. If you desire to use our LED drivers to operate non-LED loads please contact us to discuss compatibility.

Specifications subject to change without notice.

Rev 6-30-16



**Dimensions - IN [mm]**

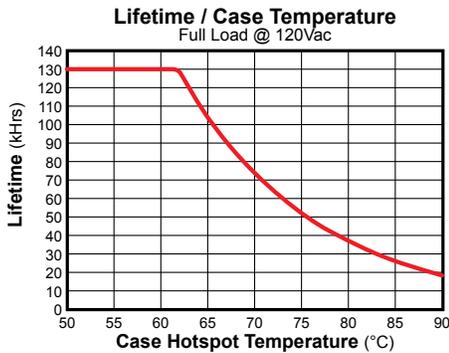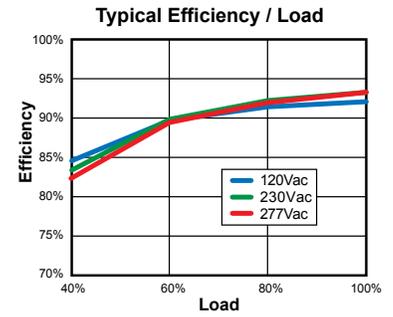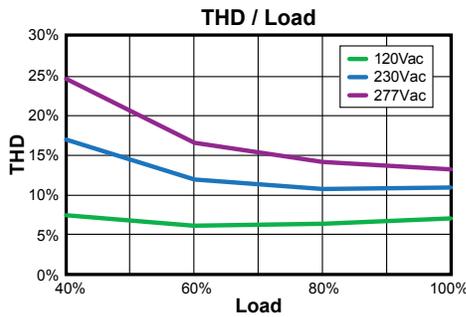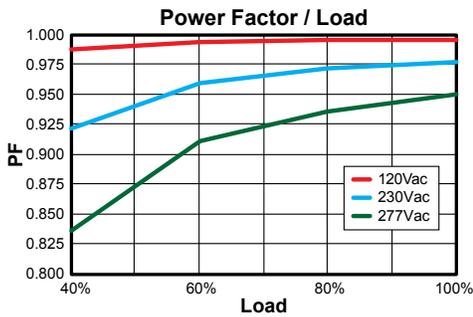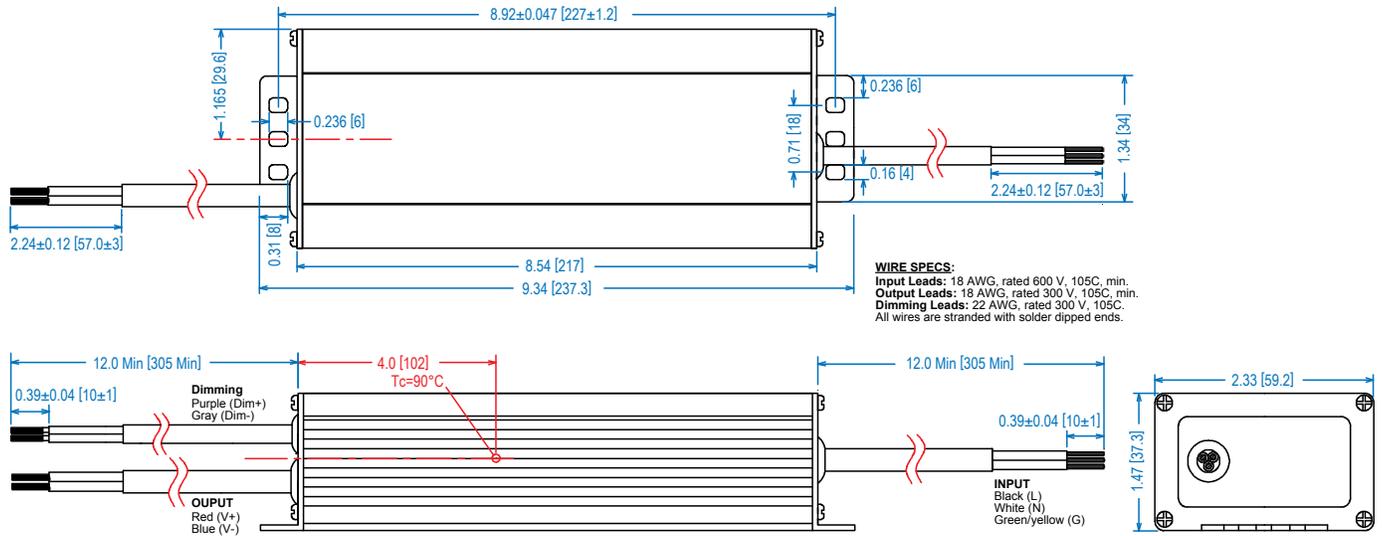

**Note:**  
 Life calculations are based on reliability with confidence using a 90% confidence level and <5% failure rate. At a confidence level of 90% it is expected that <5% of the parts will fail at the rated life provided. (Failure is defined as a driver drifting outside specification, rather than fail to operate)

Safety Cert.	Standard
UL/CUL	UL8750 & CAN/CSA-22.2 No. 250.13-12, UL1012/CSA-C22.2 No.107.1
CE	EN 61347-1, EN61347-2-13
EMC Standard	Notes
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, >80% Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2 kV L-N, 4 kV L-G & N-G


**UL Conditions of Acceptability**

See website for additional information

**"-D" and "-D3" Options: 0-10VDC and Resistance Dimming**


Parameters	Minimum	Typical	Maximum
10V Output, Yellow Wire	9.2V	10.0V	10.8V
Source Current out of Aux Yellow Wire	—	—	10mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-2.0V	—	+15V
Source Current out of 0-10V Purple Wire	0mA	—	2mA

**Typical Dimming Circuit**

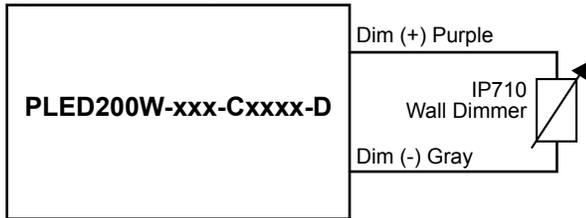


(Dimmer must be current-sink type control)

**3-Wire Dimming Typical Circuit**

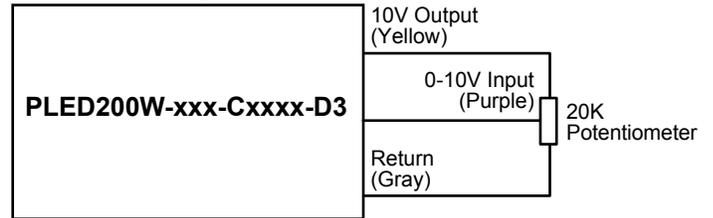

**Output Current / 0-10VDC Dimming Input**

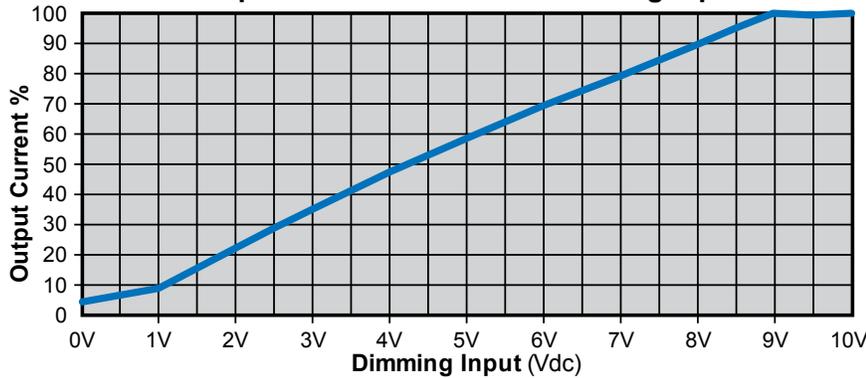


**Notes:**

1. 0-10V dimmable version comes with an extra two wires +Purple/-Gray on the output side.
2. Compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal. Recommended dimmer is Leviton IP710 or equivalent
3. 0-10V dimmable version is not intended to dim to zero (off). Will be lout <10% @ Vdim <1.0V
4. 0-10V dimmable version output will be 100% with Purple/Gray open and minimum with Purple/Gray Shorted.

**"-PD" Option: PWM Dimming**

Parameters	Minimum	Typical	Maximum
Absolute Maximum Voltage Range on PWM Input (Purple Wire)	-2.0V	10V	+15V
Input LOW Level Voltage Range (Purple Wire)	-2.0	0V	+5.5V
Input HIGH Level Voltage Range (Purple Wire)	+9.0	10V	+15V
Current into PWM Input (Purple Wire)	0mA	—	1.2mA
Source Current out of PWM Input (Purple Wire)	0mA	—	2mA
PWM Input Signal Frequency	500Hz	—	1500Hz
PWM Input Signal Positive Duty Cycle	0%	10-90%	100%

**PWM Positive Dimming Typical Circuit**

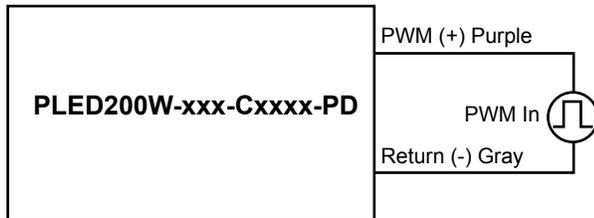

**Output Current / 1.0 kHz Positive Duty Cycle**



**Notes:**

1. PWM Dimmable version comes with an extra 2 wires +Purple/-Gray on the output side.
2. Below 10% Duty cycle proper dimming operation is not assured. Unit is not intended to turn off at <10% Duty Cycle.
3. PWM dimmable version output will be 100% with Purple/Gray open and minimum with Purple/Gray Shorted.