

DESCRIPTION

The PM150 series of AC-DC switching power supplies in a package of 2 x 4 x 1.3 inches are capable of delivering 100-150 watts of continuous power at 7 CFM forced air cooling or 100 watts at convection cooling. The units are constructed on a printed circuit board. They are specially designed for medical applications, but not for life-supporting equipment. The units are also certified to IEC /EN /UL /CSA 60950-1 and suitable for data networking, computer and telecommunication applications.

FEATURES

- 2 x 4 inch footprint with 1.3 inch low profile
- 100-240 VAC input with active PFC
- Less than 275 μ A leakage current
- Meet EN55011 /55022 and FCC Class B
- Power Factor 0.98 typical
- 100% burn-in at full load
- Short-circuit protection
- Power Fail Detect (PFD) signal (option)
- Compliant with RoHS requirements
- Efficiency greater than 87%
- No load power consumption less than 0.5W without PFD or 1W with PFD

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	1.7 A (rms) for 115 VAC 0.85 A (rms) for 230 VAC
Earth leakage current:	275 μ A max. @ 264 VAC, 63 Hz


OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Total output power:	See rating chart.
Ripple and noise:	See rating chart.
Overvoltage protection:	set at 112-140% of its nominal output voltage
Overcurrent protection:	Output protected to short circuit conditions
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change
Fan power:	12 V at 1.0 A maximum (isolated)

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0 $^{\circ}$ C to +70 $^{\circ}$ C
Storage temperature:	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Relative humidity:	5% to 95% non-condensing
Derating:	Derate from 100% at +50 $^{\circ}$ C linearly to 50% at +70 $^{\circ}$ C, applicable to convection and forced-air cooling conditions

PM150 SERIES

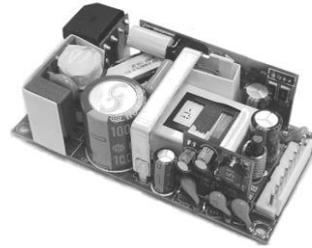

SAFETY STANDARD APPROVAL

Pending

GENERAL SPECIFICATIONS

Switching frequency:	133 KHz (typical)
Efficiency:	See rating chart.
Hold-up time:	10 ms minimum at 120 VAC
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	55 A @ 115 VAC or 110 A @ 230 VAC, at 25 $^{\circ}$ C cold start
Withstand voltage:	5600 VDC from input to output (2 MOPP) 2100 VDC from input to ground (1 MOPP) 700 VDC from output to ground (To verify AC strength, get correct test method to avoid power supply damage.)
MTBF:	250,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per MIL-HDBK-217F
EMC Performance	
EN55011/EN55022:	Class B conducted, class B radiated
FCC:	Class B conducted, class B radiated
VCCI:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class A and D
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, ± 8 KV air and ± 6 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ± 2 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 3 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, 60% reduction for 100 ms, >95% reduction for 10 ms


OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Output								Efficiency (typical)	
	V1	Min. load	Max. Current at convection	Max. Current at 7 CFM	Peak ⁽¹⁾ Current	Tol.	Ripple & Noise ⁽³⁾	Max. Power ⁽²⁾	Max. Power at convection 115/230 Vac	Max. Power at 7 CFM 115/230 Vac
PM150-12A	12 V	0 A	8.30 A	12.50 A	14.0 A	±2%	120 mV	100 W /150 W	87 /89%	86 /88%
PM150-13A	15 V	0 A	6.70 A	10.00 A	11.0 A	±2%	150 mV	100 W /150 W	87 /89%	86 /88%
PM150-13-1A	18 V	0 A	5.56 A	8.34 A	9.2 A	±2%	180 mV	100 W /150 W	87 /89%	86 /88%
PM150-14A	24 V	0 A	4.20 A	6.30 A	7.0 A	±2%	240 mV	100 W /150 W	87 /89%	86 /88%
PM150-16A	30 V	0 A	3.34 A	5.00 A	5.6 A	±2%	300 mV	100 W /150 W	87 /89%	86 /88%
PM150-17A	36 V	0 A	2.78 A	4.17 A	4.6 A	±2%	360 mV	100 W /150 W	87 /89%	86 /88%
PM150-18A	48 V	0 A	2.10 A	3.10 A	3.5 A	±2%	480 mV	100 W /150 W	87 /89%	86 /88%

NOTES:

1. Peak output current with 10% duty cycle maximum for less than 15 seconds, average power not to exceed maximum power rating.
2. The first value of max. power is at convection cooling. The second value is with 7 CFM forced air provided by user.
3. Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

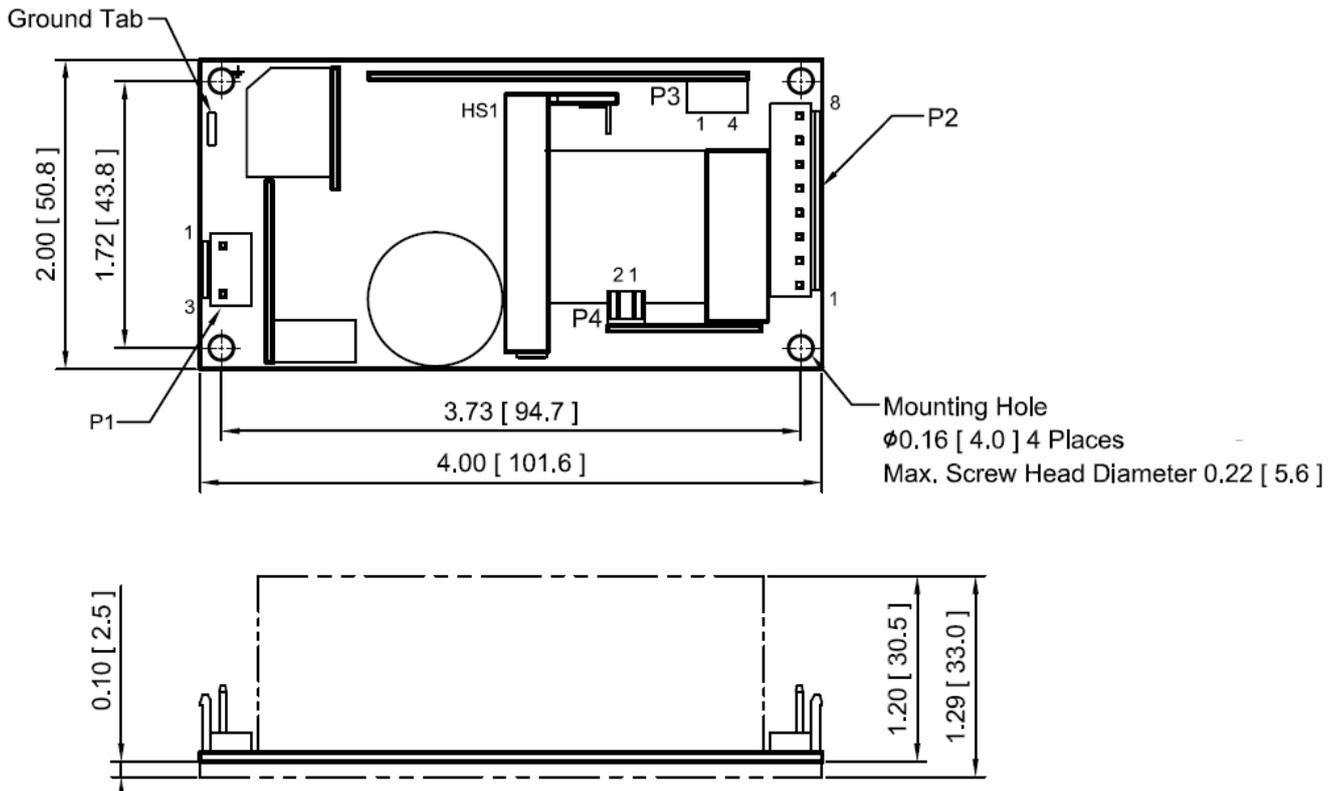


NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Input connector P1: JST header P/N V3P-VH-B, mating with JST housing P/N VHR-3N or equivalent.
4. Output connector P2: JST header P/N V8P-VH-B, mating with JST housing P/N VHR-8N or equivalent.
5. Connector P3: JST header B4B-PH-K-S (LF) (SN) , mating with JST housing PHR-4 or equivalent.
6. FAN connector P4: JST header B2B-PH-K-S (LF) (SN) , mating with JST housing PHR-2 or equivalent.
7. Ground tab is 0.25 [6.35] × 0.032 [0.8] fast-on connector.
Weight: 200 grams (0.44 lbs.) approx.

INTERFACE SIGNALS

PFD: TTL logic high for normal operation and TTL logic low upon loss of input power. This signal appears at least 1ms prior to V1 output dropping 5% below its nominal value. This signal also provides a minimum delay of 100 ms after V1 is within regulation.

OUTPUT POWER DERATING CURVE

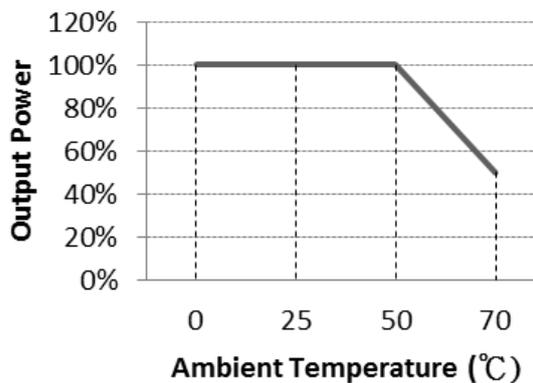

PIN CHART

Connector	P1			P2							
PIN NO	1	2	3	1	2	3	4	5	6	7	8
Polarity	Neutral	Void	Live	Common Return				+V1			

Connector	P3				P4	
PIN NO	1	2	3	4	1	2
Polarity	Common Return	PFD	-Sense	+Sense	+12V Fan	Fan Return (Isolated)