

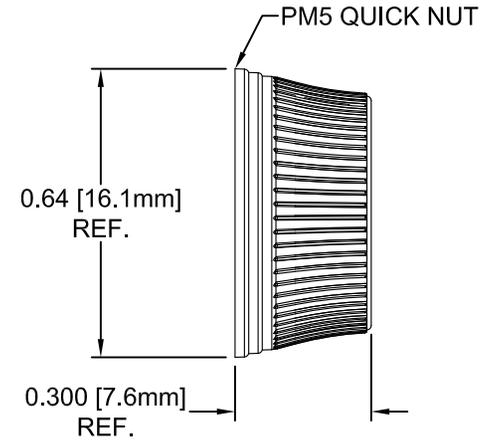
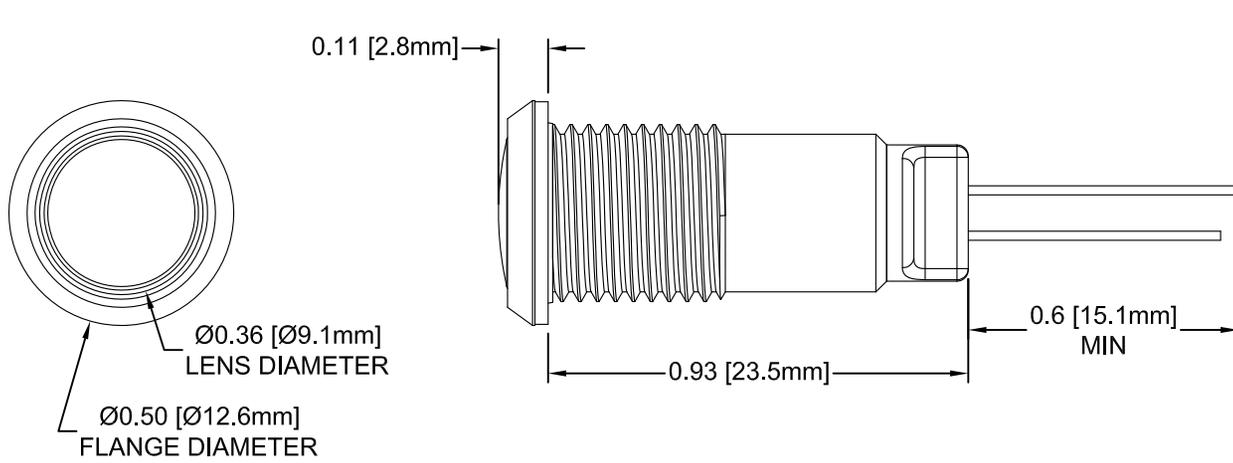


REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release.	04/29/14	J. C.
B	Updated Lead Dimension.	09/19/14	J. C.
C	Corrected Typo on Page 2.	09/24/14	J. C.

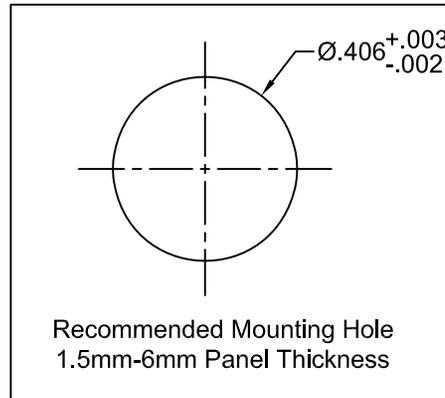

NOTE: QUICK NUT
INSERT PREINSTALLED

NOTE: LENS SEALED
TO HOUSING

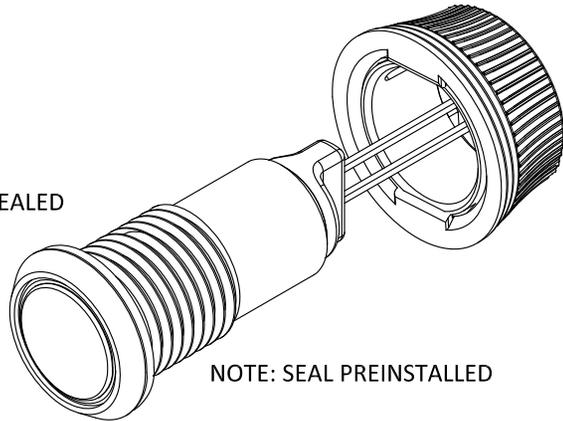

EXAMPLE:
PM5-KNGD

LED Color
Series

- NOTES:
1. ROHS COMPLIANT
 2. MOUNTING HARDWARE SHIPPED NON-ASSEMBLED

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 BIVAR [®] 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974				
DECIMALS	ANGULAR					
.X ± .1	X° ± 1°		TITLE: Quick-Mount Panel Mount Indicator			
.XX ± .02			DESIGNED: Alex Wright	DATE: 03/24/14	PART NO: PM5-KNXXX	REVISION: C
.XXX ± .010			CHECKED: Brian Oliver	DATE: 03/24/14	CAGE CODE : 32559	SHEET # 1 OF 2

REV.	DESCRIPTION	DATE	APPROVED
	SEE SHEET #1		

Assembly Part Number	LED Part Number	Peak Wave Length λ_p (nm)	Emitted Color	Electro-Optical Data @ 20mA		Viewing Angle
				Typ Vf (VDC)	Assembly Iv (mcd)	
				TYP	TYP	
PM5-KNAD	5AD	605	AMBER	2.0	9	120
PM5-KNBWD	5BWD0.345	430	BLUE	4.0	70	120
PM5-KNGD	5SGD	568	GREEN	2.1	11	120
PM5-KNRD	5SRD	645	RED	1.7	14	120
PM5-KNYD	5SYD	590	YELLOW	2.0	105	120

Assembly Part Number	LED Part Number	Color Temperature	Emitted Color	Electro-Optical Data @ 20mA		Viewing Angle
				Typ Vf (VDC)	Assembly Iv (mcd)	
				TYP	TYP	
PM5-KNWD	5UWD0.660N	5000K	NEUTRAL WHITE	3.2	210	120

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

MAXIMUM REVERSE VOLTAGE _____ 5V
 MAXIMUM POWER DISSIPATION _____ 150 mW
 OPERATING TEMPERATURE RANGE _____ -30°C ~ 85°C
 STORAGE TEMPERATURE _____ -40°C ~ 85°C

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974		
DECIMALS	ANGULAR			
		TITLE: Quick-Mount Panel Mount Indicator		
		DESIGNED: Alex Wright	DATE: 03/24/14	PART NO: PM5-KNXXX
CHECKED: Brian Oliver		DATE: 03/24/14	CAGE CODE : 32559 SHEET # 2 OF 2	
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.				