

# 120x120x25 mm


## 120.0~150.0 CFM




### ■ Specifications

| Model                | Bearing      | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|----------------------|--------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                      | 2BALL Sleeve | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (Inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PMD1212PTB1-A (2).GN | ☉            | 12             | 1000          | 12.0              | 4500  | 150.0    | 0.62                    | 54.0    | 220.0  | 1     |
| PMD1212PTB2-A (2).GN | ☉            | 12             | 720           | 8.6               | 4000  | 133.0    | 0.50                    | 51.0    | 220.0  | 2     |
| PMD1212PTB3-A (2).GN | ☉            | 12             | 540           | 6.5               | 3600  | 120.0    | 0.41                    | 48.0    | 220.0  | 3     |
| PMD2412PTB1-A (2).GN | ☉            | 24             | 490           | 11.8              | 4500  | 150.0    | 0.62                    | 54.0    | 220.0  | 1     |
| PMD2412PTB2-A (2).GN | ☉            | 24             | 360           | 8.6               | 4000  | 133.0    | 0.50                    | 51.0    | 220.0  | 2     |
| PMD2412PTB3-A (2).GN | ☉            | 24             | 280           | 6.7               | 3600  | 120.0    | 0.41                    | 48.0    | 220.0  | 3     |
| PMD4812PTB1-A (2).GN | ☉            | 48             | 260           | 12.5              | 4500  | 150.0    | 0.62                    | 54.0    | 220.0  | 1     |

### ■ Air Flow-Static Pressure Characteristics

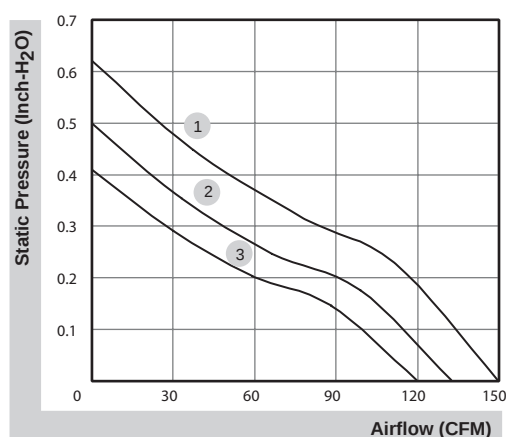

### ■ External dimensions(mm)

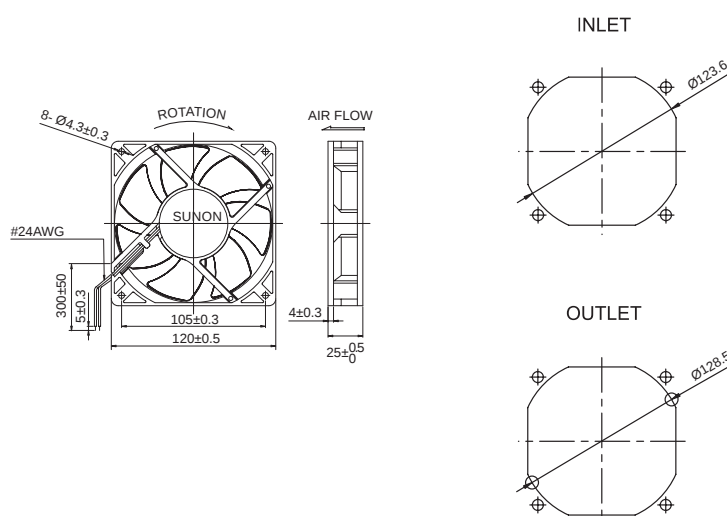

\*All model could be customized. Please contact with Sunon Sales.

\*Specifications are subject to change without notice. Please Visit SUNON website at <http://www.sunon.com> for update information.