



LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A2	REVISED PER ECO-15-014342	07OCT2015	NK	RH

- 1
- HARDWARE SUPPLIED WITH THREADED-BUSHING
PARTS ONLY: TE P/N 2213733-1 (NUT) X2
P/N 2213733-2 (LOCKING WASHER) X1

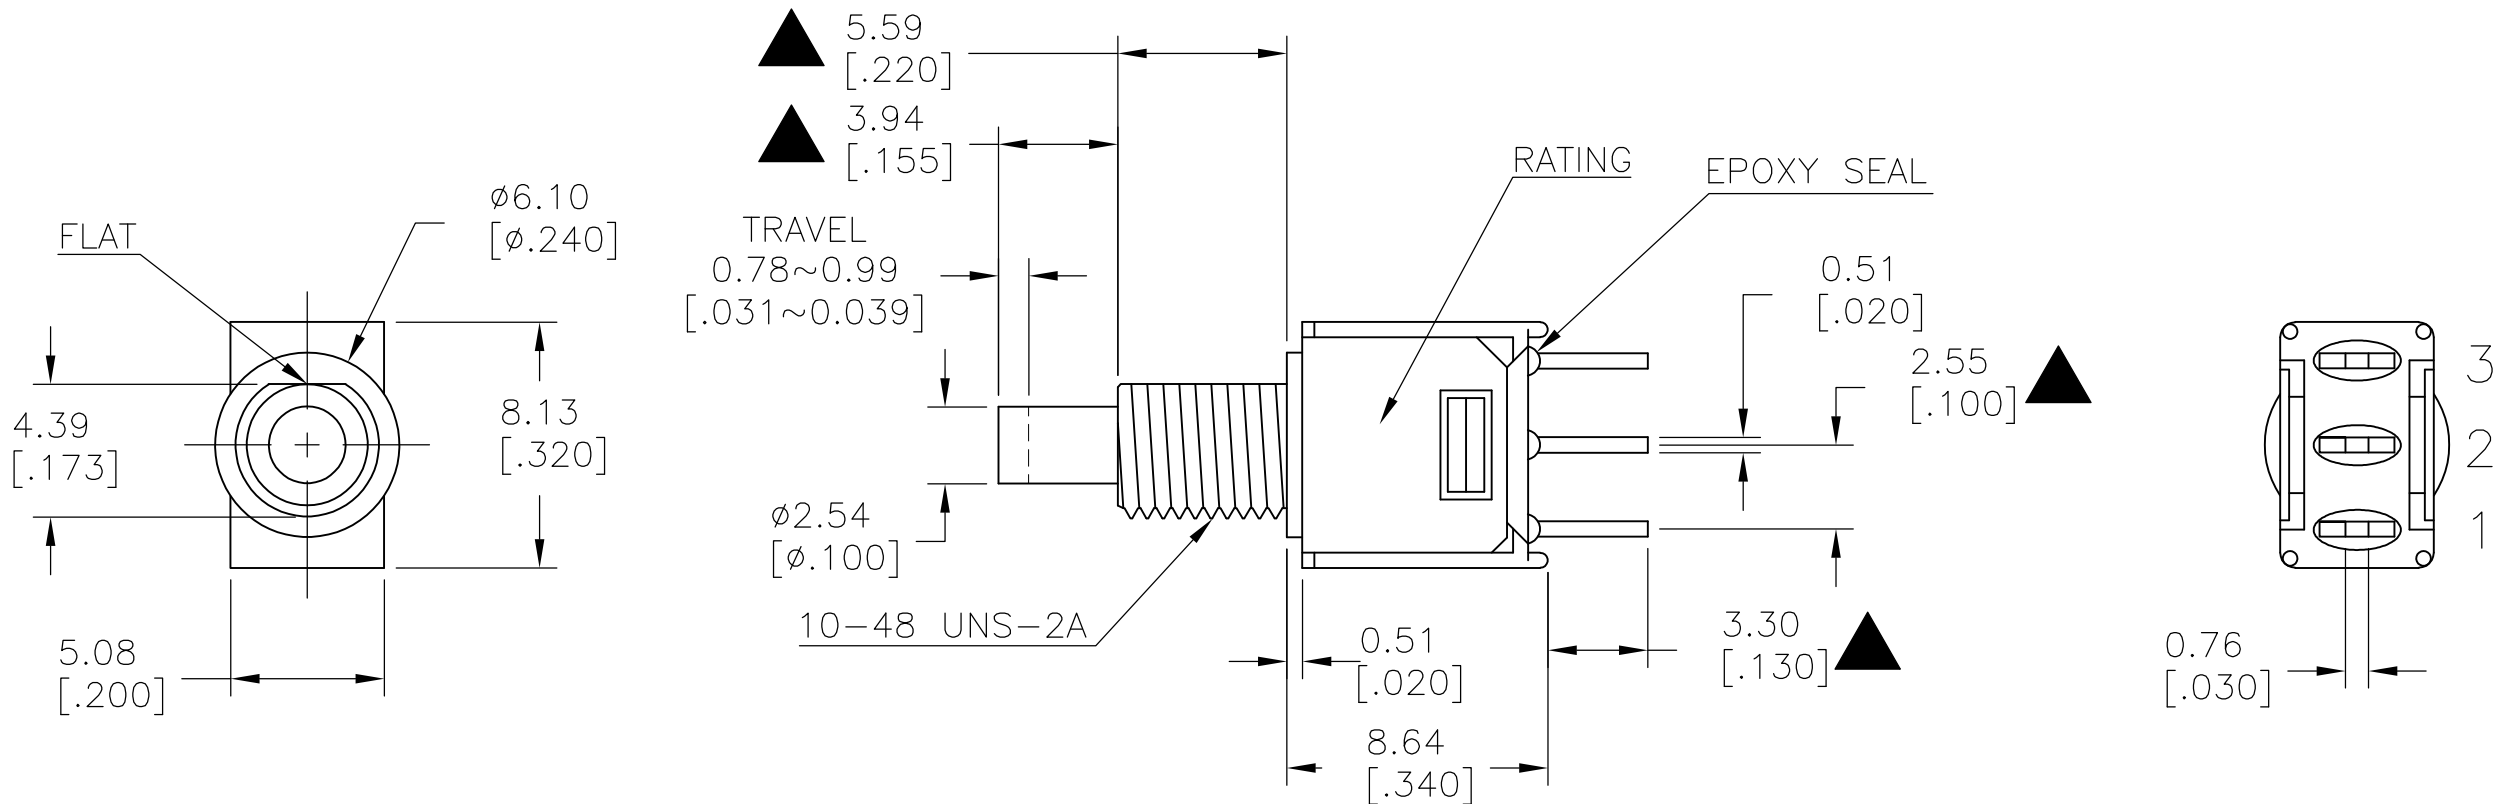


MODEL NO.	POS.1	POS.2
PMS9	ON	MOM
TERM. COMM.	2-1	2-3
SCHEMATIC		

SWITCH FUNCTION

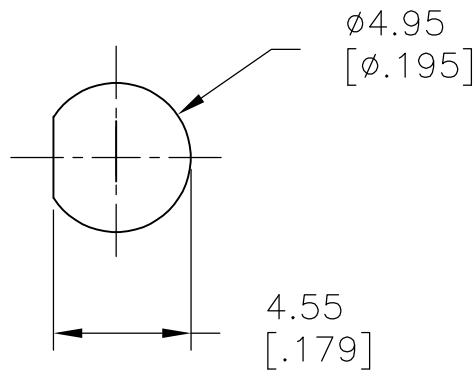

PANEL MOUNTING

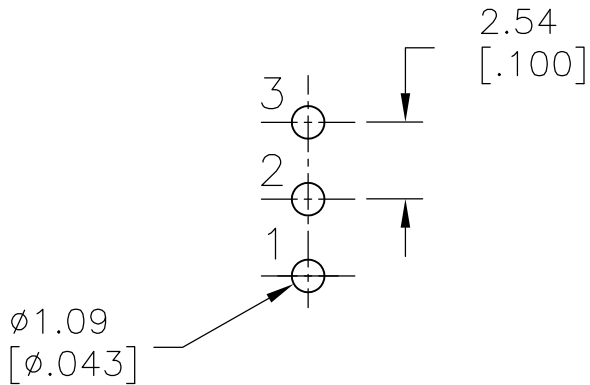

P.C. MOUNTING

LAYOUT FOR PN 2267074-4



SPECIFICATIONS

- MECHANICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES.
- CONTACT RESISTANCE: 20mΩMAX. INITIAL @ 2-4VDC
100mA FOR BOTH SILVER AND GOLD PLATED CONTACTS.
- CONTACT RATING: GOLD PLATED: 0.4VA MAX @20 V MAX (AC OR DC)
- INSULATION RESISTANCE: 1,000MΩMIN.
- DIELECTRIC STRENGTH: 1,000 V RMS@SEA LEVEL.
- OPERATING TEMPERATURE: -30°C TO 85°C.

SILVER	ON-MOM	PC THROUGH HOLE	VERTICAL	1	1	PMS8P1B05M2QE	2267074-4
SILVER	OFF-MOM	PC THROUGH HOLE	VERTICAL	1	1	PMS9P1B05M2QE	2267074-3
GOLD	OFF-MOM	PC THROUGH HOLE	RIGHT ANGLE	1	1	PMS9P1B05M6RE	2267074-2
GOLD	OFF-MOM	PC THROUGH HOLE	VERTICAL	1	1	PMS9P1B05M2RE	2267074-1
CONTACT MATERIAL	FUNCTION	TERMINATION	MOUNT ANGLE	POLES	THROWS	DESCRIPTIVE PN	TE PN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09JUL2014 NAGALAKSHMI K	TE Connectivity				
DIMENSIONS: mm [INCHES]		CHK 09JUL2014 HILL, RYAN					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 09JUL2014 HILL, RYAN	NAME				
0 PLC ± - 1 PLC ± 0.38[.015] 2 PLC ± 0.25[.010] 3 PLC ± - 4 PLC ± - ANGLES ± 5°		PRODUCT SPEC	SUBMINIATURE PUSH BUTTON SWITCH				
MATERIAL		FINISH	SIZE CAGE CODE DRAWING NO				
-		-	A2 00779 C=2267074				
CUSTOMER DRAWING		WEIGHT	RESTRICTED TO				
-		-	SCALE 3:1 SHEET 1 OF 4 REV A2				

		1					
LOC	DIST	REVISIONS					
—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

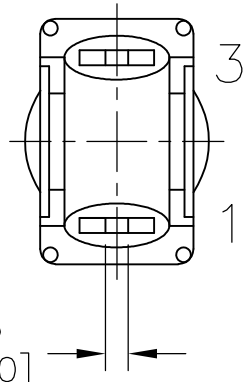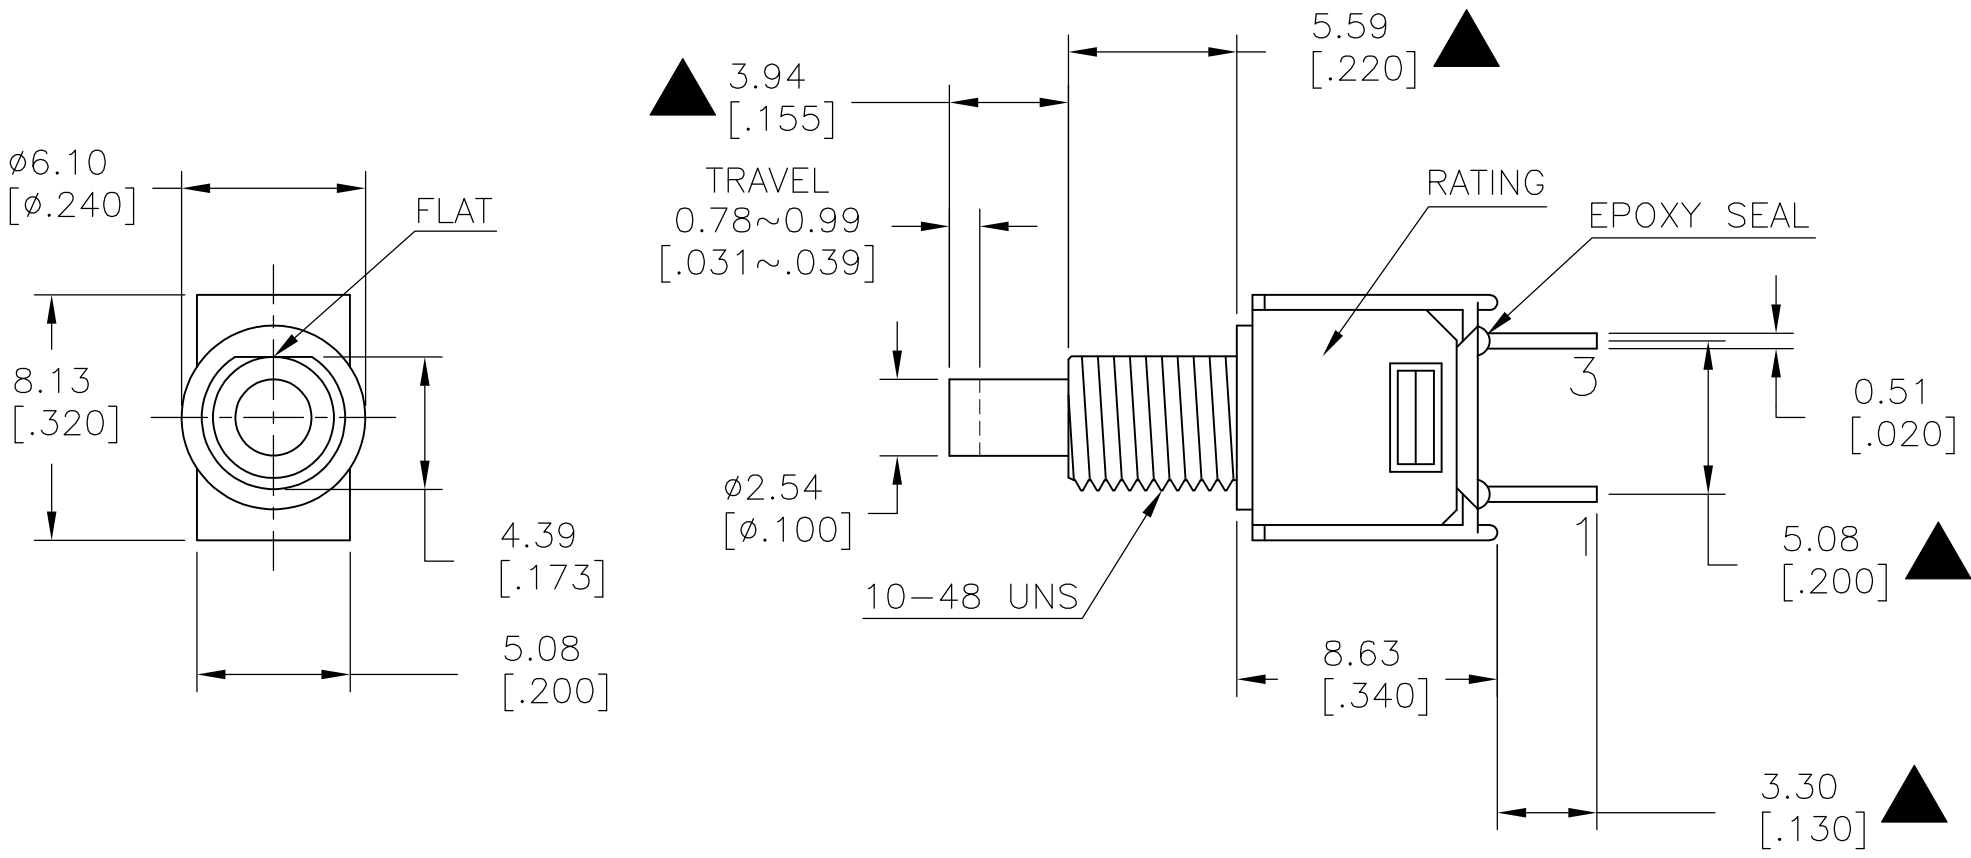


MODEL NO.	POS.1	POS.2
PMS9	OFF	MOM
TERM. COMM.	OPEN	1-3
SCHEMATIC		

SWITCH FUNCTION


PANEL MOUNTING

P.C. MOUNTING

LAYOUT FOR PN 2267074-3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 09JUL2014		 TE Connectivity						
		CHK HILL, RYAN 09JUL2014								
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SUBMINIATURE PUSH BUTTON SWITCH						
	0 PLC ± -		APVD HILL, RYAN 09JUL2014							
	1 PLC ± 0.38[.015]		PRODUCT SPEC							
	2 PLC ± 0.25[.010]		—							
	3 PLC ± -		APPLICATION SPEC							
4 PLC ± -		—	SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL	FINISH	WEIGHT	—	A2	00779	C=2267074	—			
CUSTOMER DRAWING				SCALE		3:1	SHEET	2 of 4	REV	A2

		1					
LOC	DIST	REVISIONS					
—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

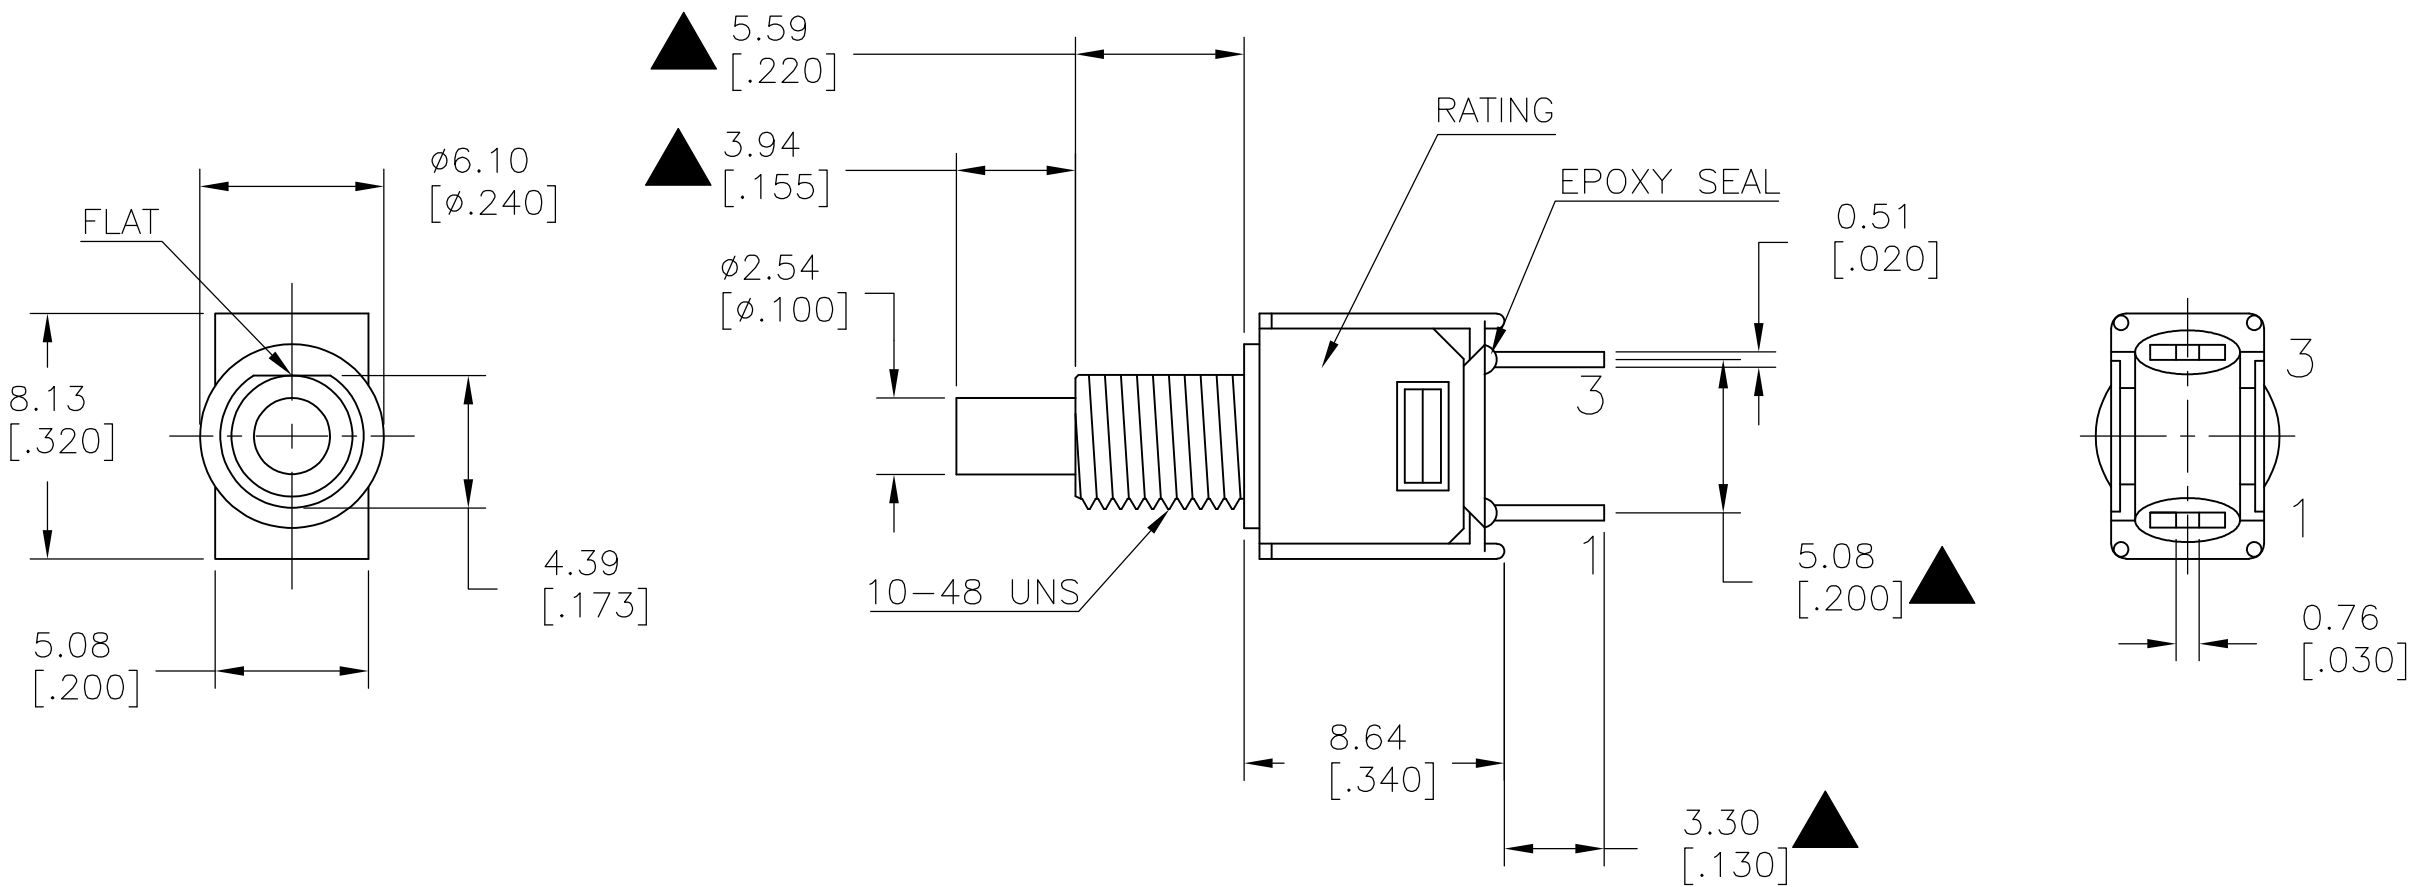

MODEL NO.	POS.1	POS.2
PMS9	OFF	MOM
TERM. COMM.	OPEN	1-3
SCHEMATIC		

SWITCH FUNCTION

PANEL MOUNTING



P.C. MOUNTING

LAYOUT FOR PN 2267074-1


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K	09JUL2014	TE Connectivity		
		CHK HILL, RYAN	09JUL2014			
		APVD HILL, RYAN	09JUL2014	NAME SUBMINIATURE PUSH BUTTON SWITCH		
		PRODUCT SPEC —				
		APPLICATION SPEC —				
		WEIGHT —		SIZE A2	CAGE CODE 00779	DRAWING NO C=2267074
		CUSTOMER DRAWING		SCALE 3:1	SHEET 3 OF 4	REV A2

MODEL NO.	POS.1	POS.2
PMS9	OFF	MOM
TERM. COMM.	OPEN	1-3
SCHEMATIC		

SWITCH FUNCTION

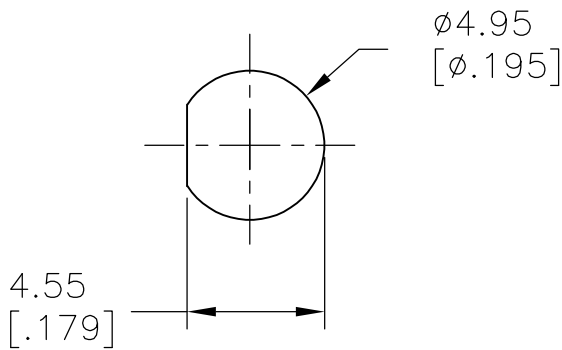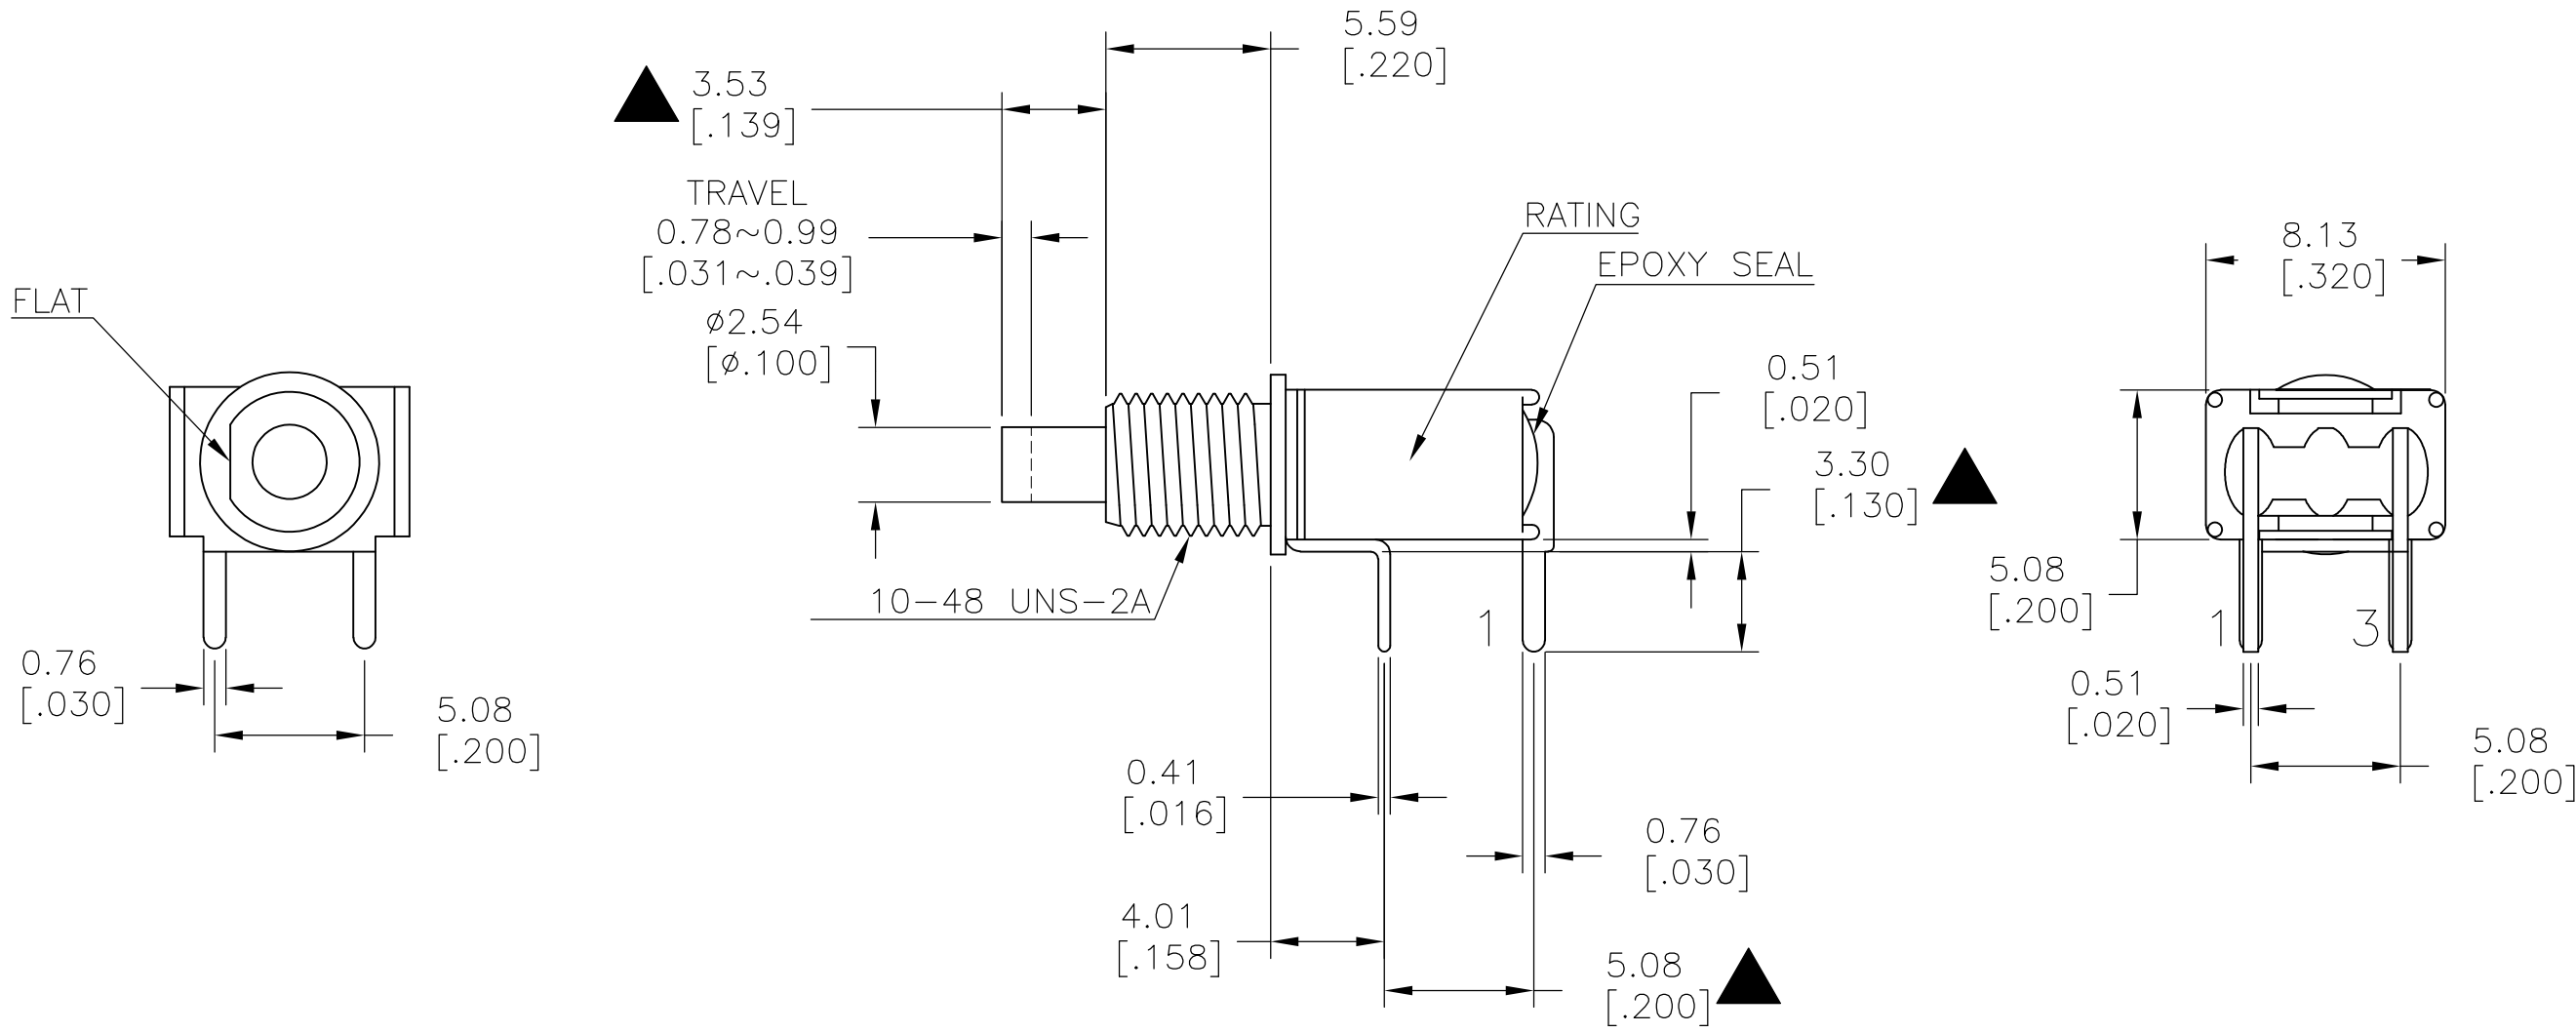

PANEL MOUNTING

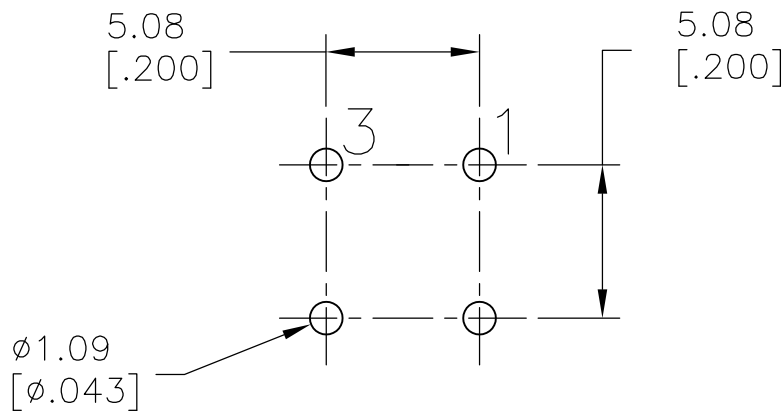

P.C. MOUNTING

LAYOUT FOR PN 2267074-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
NAGALAKSHMI K

CHK
HILL, RYAN

APVD
HILL, RYAN

09JUL2014

09JUL2014

09JUL2014

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	—
1 PLC	±	0.38[.015]
2 PLC	±	0.25[.010]
3 PLC	±	—
4 PLC	±	—
ANGLES	±	5°
FINISH	—	—

MATERIAL

—

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

—

CUSTOMER DRAWING

—

TE Connectivity

NAME

SUBMINIATURE PUSH BUTTON SWITCH

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C=2267074

—

SCALE

SHEET

REV

3:1

4 OF 4

A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[PMS9P1B05M2RE](#)