




4-Port 95W per Port Midspan Mega Power over Ethernet Midspans

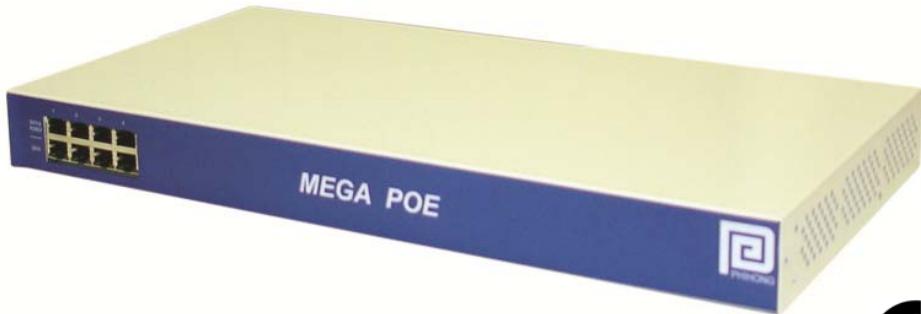

Features

- Proprietary Detection, Disconnect and Overload Protection
- SNMP Management
- Mega PoE 95W per Port
- Diagnostic LEDs
- 1U Rack Mounting Kit Ships with Unit
- Fully Compliant Detection, disconnect and Voltage Control per IEEE802.3af
- Gigabit Compatible
- Full Protection OCP, OVP
- Limited Power Source
- 1 Year Warranty

Applications

- Wireless Access Points
- Computer Workstations
- Kiosks
- Security Systems
- IP Cameras
- Magnetic Locks

Safety Approvals

- CE
- cUL/UL

Mechanical Characteristics

- Length: 438mm (17.25in)
- Width: 228mm (8.98in)
- Height: 44.5mm (1.75in)
- 3.8Kg (8.5lbs)

Output Specifications

Model ⁽¹⁾	DC Output Voltage	Load		Output Power per Port
		Min.	Max. ⁽²⁾	
POE576U-4MP-N-R	56V	15mA	1.69A	95W

Note (1): Model without SNMP management available upon special request

Note (2): Max load applies to compliant load at 12.5K detection. If operating at 25K "IEEE802.3at mode" max load is 0.6A

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:**Input Voltage Rating**

100 to 240VAC

Input Voltage Range

90 to 264VAC

AC Input Current9.0A (RMS) 90VAC at maximum load
4.25A (RMS) 230VAC at maximum load**AC Input Frequency**

47 to 63Hz

Leakage Current

3.5mA maximum at 264VAC and 60Hz

Max In-Rush Current:30A for 115VAC at maximum load
60A for 230VAC at Maximum load
(Cold Start at Ambient 25°C)**OUTPUT:****Total Output Power**95W per port
380W Maximum Total Power**Ripple and Regulation**

250mV maximum

Efficiency

75% (typical) at maximum load, and 120VAC 60Hz

Hold-Up Time

16mS min. 120VAC and maximum load

Transient O/P Voltage Protection

60V maximum at switch on and off at any AC line Phase

Turn-On Delay Time

20 sec maximum at maximum load, 120VAC 60Hz

ENVIRONMENTAL**Temperature**Operation 0 to +40C
Non-Operation -25 to +65C**Humidity**Operation 5 to 90%
Non-Operation 5 to 90%**EMC**EN55022 Class A, FCC Class A with UTP cabling
EN55022 Class B, FCC Class B with FTP cabling**Isolation Test**Primary to Secondary: 4242VDC for 1 minute
Primary to Ground: 2121VDC for 1 minute
Secondary to Ground: 2121VDC for 1 minute**Immunity EN50082-1**

ESD:	EN61000-4-2	Level 3
RS:	EN61000-4-3	Level 2
EFP:	EN61000-4-4	Level 2
Surge:	EN61000-4-5	Level 3
CS:	EN61000-4-6	Level 2
Voltage Dips:	EN61000-4-11	
Harmonic:	EN61000-3-2	Class A

IEEE802.3af/at Interoperability

If 25K Ohm is detect the unit operates in "IEEE802.3at mode" 33.6W 2 pair powering. 12.5K detection resistance required for full power.

FEATURE:**Cisco Legacy Detection**

No extern parts required for Legacy Devices:

VoIP Phones:
7910, 7912, 7940, 7960
Access Points
350, 1100, 1200**Over-Voltage/Current, Short Circuit Protection**

Outputs equipped with short circuit protection and overload protection as per 802.3af specification except at maximum average current is 1.69A

The output can be shorted permanently without damage

Over Temperature Protection

Automatic shutdown without damage

IndicatorsSolid Green LED: Power detected "ON"
Flashing Green: IEEE802.3at or (af) detected
Yellow LED: Fault detected**SNMPv2c management port Interface**


NIC interface for remote management via secure IP access

Input Connector

AC Input IEC320 C14

Output Connection4-pair powering for full power
Pins 3,6, 4,5(+) Pins 1,2, 7,8 (-)2-pair powering for IEEE802.3at mode
Pins 3,6(+) Pins 1,2 (-)**Warranty**

1 Year

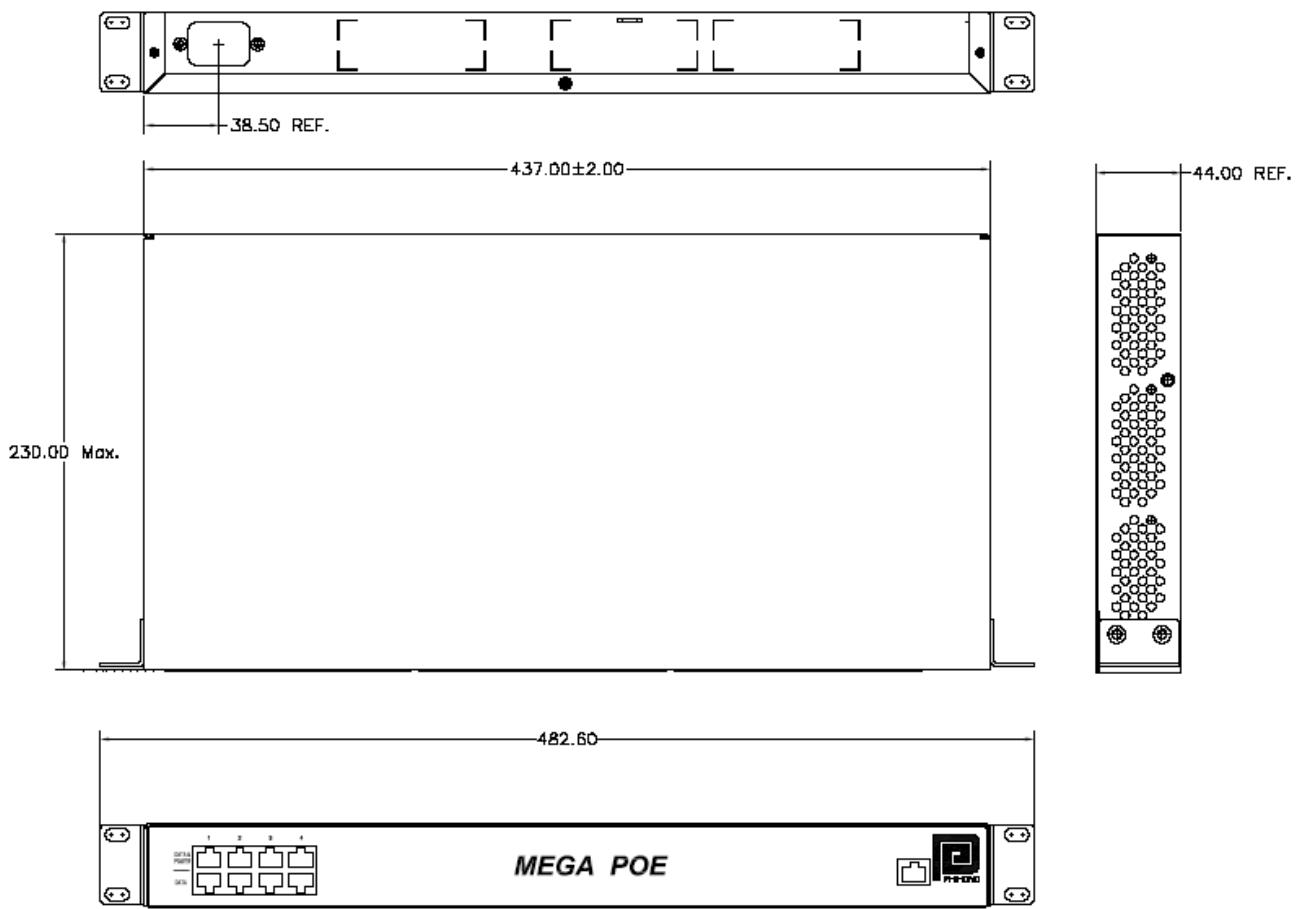

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phihong:](#)

[POE576U-4MP-N-R](#)