



8-Port 95W per Port Midspan Mega Power over Ethernet Midspan



Features

- Proprietary Detection (12.5K), Disconnect and Overload Protection
- SNMP v2c Management
- Mega PoE 95W per Port
- Diagnostic LEDs
- 1U Rack Mounting Kit Ships with Unit
- Fully Compliant Detection, disconnect and Voltage Control per IEEE802.3at
- Gigabit Compatible
- Full Protection OCP, OVP
- Limited Power Source
- 1 Year Warranty

Applications

- Wireless Access Points
- Computer Workstations
- Kiosks
- Security Systems
- IP Cameras
- Magnetic Locks

Safety Approvals

- CE
- cUL/UL

Mechanical Characteristics

- Length: 438mm (17.25in)
- Width: 228mm (8.98in)
- Height: 44.5mm (1.75in)
- 3.8Kg (8.5lbs)

Output Specifications

Model ⁽¹⁾	DC Output Voltage	Load		Output Power per Port
		Min.	Max. ⁽²⁾	
POE806U-8MP-N	56V	15mA	1.69A	95W

Note (1): Model without SNMP management available upon special request.

Note (2): Max load applies to compliant load at 12.5K detection. If operating at 25K "IEEE802.3at mode" max load is 0.6A

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

POE806U-8MPN Characteristics

WWW.PHIHONG.COM

INPUT:

AC Input Voltage Rating

100 to 240VAC

AC Input Voltage Range

90 to 264VAC

AC Input Current

15.0A (RMS) 90VAC at maximum load

10.0A (RMS) 230VAC at maximum load

AC Input Frequency

47 to 63Hz

Leakage Current

< 3.5mA maximum at 264VAC, 60Hz

Max In-Rush Current:

30A for 115VAC at maximum load

60A for 230VAC at Maximum load

(Cold Start at Ambient 25°C)

OUTPUT:

Total Output Power

95W per port

760W Maximum Total Power

Ripple (P-P)

250mV maximum

Efficiency

75% (typical) at maximum load, and 120VAC 60Hz

Hold-Up Time

16mS min. 120VAC and maximum load

Transient O/P Voltage Protection

60V maximum at switch on and off at any AC line Phase

Turn-On Delay Time (for PoE detection)

20 sec maximum at maximum load, 120VAC 60Hz

ENVIRONMENTAL

Temperature

Operation 0 to +40C

Non-Operation -25 to +65C

Humidity

Operation 5 to 90%

Non-Operation 5 to 90%

EMC

EN55022 Class A, FCC Class A with UTP cabling

EN55022 Class B, FCC Class B with FTP cabling

Isolation Test

Primary to Secondary: 4242VDC for 1 minute

Primary to Ground: 2121VDC for 1 minute

Secondary to Ground: 2121VDC for 1 minute

Immunity EN50082-1

ESD: EN61000-4-2 Level 3

RS: EN61000-4-3 Level 2

EFP: EN61000-4-4 Level 2

Surge: EN61000-4-5 Level 3

CS: EN61000-4-6 Level 2

Voltage Dips: EN61000-4-11

Harmonic: EN61000-3-2 Class A

IEEE802.3af/at Interoperability

If 25K Ohm is detected then the unit operates in "IEEE802.3at mode" 33.6W 2 pair powering. 12.5K detection resistance required for full power 95W/port.

Over-Voltage/Current, Short Circuit Protection

Outputs equipped with short circuit protection and overload protection as per 802.3af specification except at maximum average current is 1.69A

The output can be shorted permanently without damage

Over Temperature Protection

Automatic shutdown without damage

Indicators

Solid Green LED: Power detected "ON"

Flashing Green: IEEE802.3at or (af) detected

Yellow LED: Fault detected

SNMPv2c management port Interface

NIC interface for remote management via secure IP access

Input Connector (Standard Model)

AC Input IEC320 C14

Output Connection

4-pair powering for full power

Pins 3,6, 4,5(+) Pins 1,2, 7,8 (-)

2-pair powering for IEEE802.3at mode




Pins 3,6(+) Pins 1,2 (-)

Warranty

1 Year

POE806U-8MPN Dimension Diagram Unit: mm

WWW.PHIHONG.COM

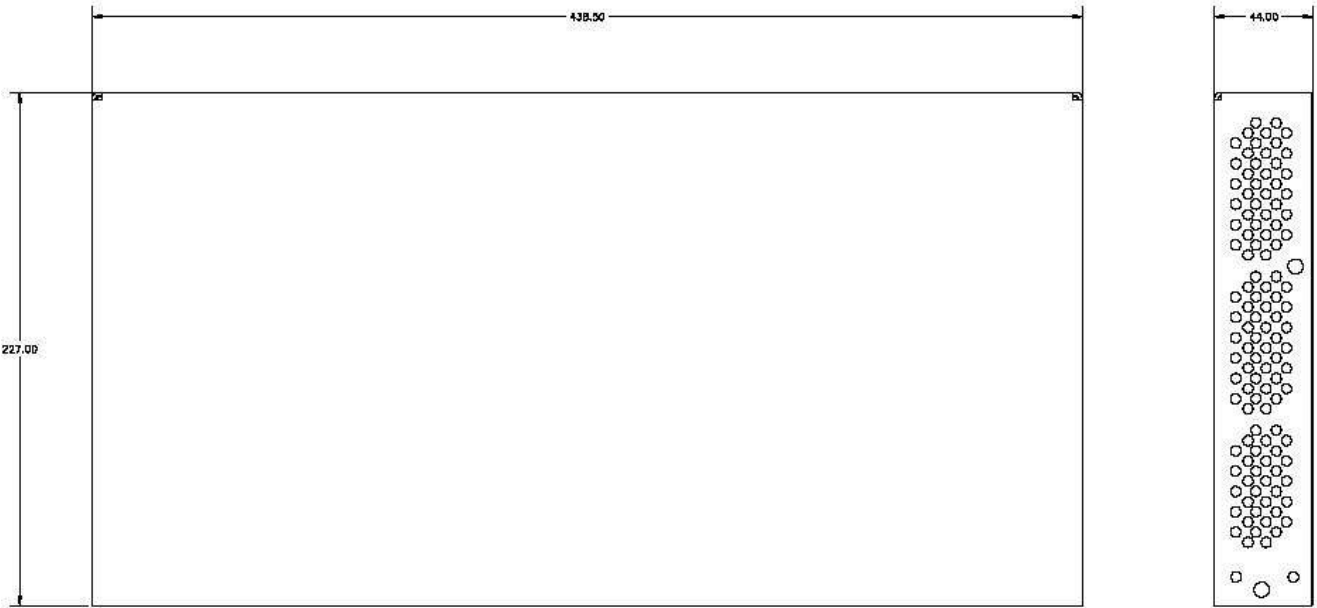

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phihong:](#)

[POE806U-8MP-N-R](#)