


Datasheet

Aluminium Housed Proximity Switch - Changeover Contacts

Part Number : PRC-SA-002 Recommended Magnet PRM-SA-003

Product Data Sheet

PICTURE	DIMENSIONS
---------	------------

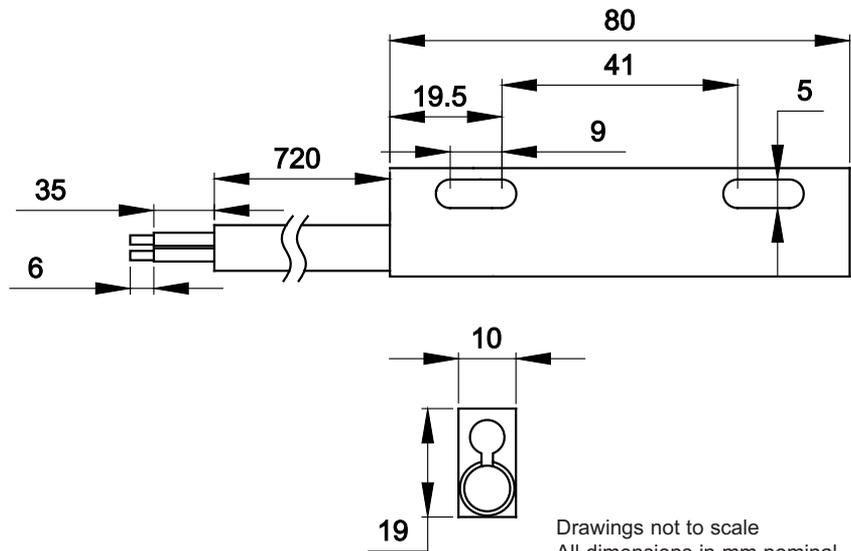

Drawings not to scale
All dimensions in mm nominal

✓ RoHS Compliant

SPECIFICATION		
---------------	--	--

Contact Form / Style	Changeover	
Switching voltage	Max Volts	400 AC/DC
Switching Current	Max Amps	1.0
Switching Capacity	Max W/VA	60
Carry Current	Max Amps	2.0
Switching Distance	Make	15mm (with recommended magnet)
	Break	24mm (with recommended magnet)
Contact Resistance	Max mOhms	100
Operating Temperature	Celsius	-20° to 85°
Case Material	Blue powder coated Aluminium	
Cable	4 core 0.75mm ² Black PVC insulated, Br / Bl / Bla / G&Y	

Applications Include	Options/Features
----------------------	------------------

<ul style="list-style-type: none"> Position sensing. Linear actuators. Security switching. Safety guards/devices 	<ul style="list-style-type: none"> Robust sealed switch, custom housings available. Normally open version available. Custom cable types, cable lengths, connectors or crimp terminals available. Hermetically sealed reed switch for long life. Earthed housing for added safety
--	---