


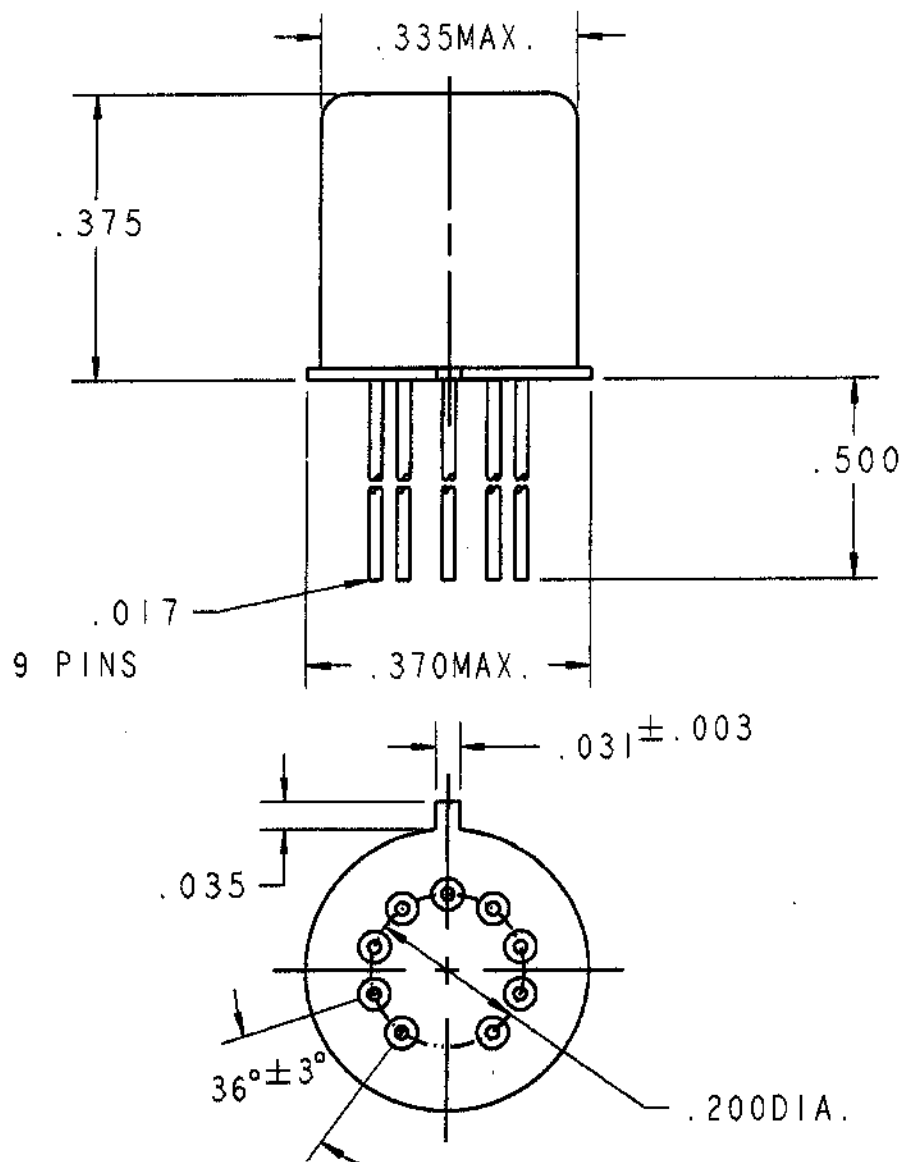

REV. 1

DCO 142992

COIL: @ 25°C
 RESISTANCE 850 OHMS ± 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 7.4 VDC
 TURN-ON BASE CURRENT 0.12 mADC MAX.
 MUST RELEASE 4.0 VDC MAX, 0.63 VDC MIN.


ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES:

TURN-ON TIME 4.0 MS MAX
 TURN-OFF TIME 7.5 MS MAX
 CONTACT STABILIZATION TIME 2.0 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 1/3/01

CK EREP 6/12/01

CII Technologies
 advanced control electronic solutions

CUST. CII
 CUST. NO. COTS STD REV.

PRMST RELAY

PRMSCT-12Y