

8-PIN SOP, 260 V BREAK DOWN VOLTAGE PS7221A-2A 2-CH OPTICAL COUPLED MOSFET

FEATURES

- **2 CHANNEL TYPE**
1a + 1a output
- **LOW LED OPERATING CURRENT**
 $I_F = \text{mA}$
- **DESIGNED FOR AC/DC SWITCHING LINE CHANGER**
- **SMALL AND THIN PACKAGE**
8-pin SOP, Height = 2.1 mm
- **LOW OFFSET VOLTAGE**
- **ORDERING NUMBER OF TAPING PRODUCT**
PS7221A-2A-F3,F4

DESCRIPTION

The PS7221-2A is a solid state relay containing GaAs LEDs on light emitting side (input side) and MOS FETs on the output side.

It is suitable for analog signal control because of its low offset and high linearity.

APPLICATIONS



- EXCHANGE EQUIPMENT (FAX, MODEM, OCU + SLIC, ETC.)
- MEASUREMENT EQUIPMENT
- FA/OA EQUIPMENT

ELECTRICAL CHARACTERISTICS¹ ($T_A = 25^\circ\text{C}$)

PART NUMBER				PS7221A-2A		
	SYMBOL	PARAMETERS	UNITS	MIN	TYP	MAX
Diode	V_F	Forward Voltage, $I_F = 1.5 \text{ mA}$	V		1.1	1.4
	I_R	Reverse Current, $V_R = 5 \text{ V}$	μA			5.0
MOS FET	I_{LOFF}	Off-state Leakage Current, $V_D = 260 \text{ V}$	μA			1.0
	C_{OUT}	Output Capacitance, $V_D = 0 \text{ V}$, $f = 1 \text{ MHz}$	pF/ch		122	
Coupled	I_{FON}	LED On-state Current, $I_L = 170 \text{ mA}$	mA			1.0
	R_{ON}	On-state Resistance, $I_F = 10 \text{ mA}$, $I_L = 10 \text{ mA}$	Ω		3.4	10
	T_{ON}	Turn-on Time ¹ , $I_F = 10 \text{ mA}$, $V_0 = 5 \text{ V}$, $R_L = 500 \text{ k}\Omega$, $PW \geq 10 \text{ ms}$	ms		0.4	1.0
	T_{OFF}	Turn-off Time ¹ , $I_F = 10 \text{ mA}$, $V_0 = 5 \text{ V}$, $R_L = 500 \text{ k}\Omega$, $PW \geq 10 \text{ ms}$	ms		0.03	0.2
	$R_{\text{I-O}}$	Isolation Resistance, $V_{\text{I-O}} = 1.0 \text{ kV}_{\text{DC}}$	Ω	10^9		
	$C_{\text{I-O}}$	Isolation Capacitance, $V = 0 \text{ V}$, $f = 1 \text{ MHz}$	pF/ch		0.4	

Notes:

1. Test Circuit for Switching Time

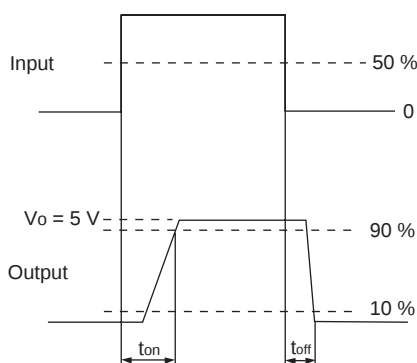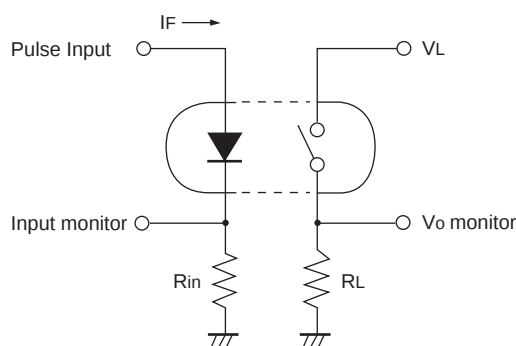

ABSOLUTE MAXIMUM RATINGS¹ (T_A = 25°C)

SYMBOLS	PARAMETERS	UNITS	RATINGS
Diode			
I _F	Forward Current	mA	50
V _R	Reverse Voltage	V	5.0
P _D	Power Dissipation	mW/ch	50
I _{FP}	Peak Forward Current ²	A	1
MOS FET			
V _L	Break Down Voltage	V	260
I _L	Countinuous Load Current	mA	170
I _{LP}	Pulse Load Current ³	mA	300
P _D	Power Dissipation	mW/ch	180
Coupler			
BV	Isolation Voltage ⁴	V _{r.m.s.}	1500
P _T	Total Power Dissipation	mW	460
T _{OP}	Operating Ambient Temp.	°C	-40 to +80
T _{STG}	Storage Temperature	°C	-40 to +100

- Notes:
- 1. Operation in excess of any one of these parameters may result in permanent damage.
 - 2. PW = 100 μs, Duty Cycle = 1%.
 - 3. PW = 100 ms, 1 shot
 - 4. AC voltage for 1 minute at T_A = 25 °C, RH = 60% between input and output.

RECOMMENDED
OPERATING CONDITIONS



PART NUMBER			PS7221A-2A		
SYMBOLS	PARAMETERS	UNITS	MIN	TYP	MAX
I _F	LED Operating Current	mA	1	10	20
V _F	LED off Voltage	V	0		0.5

ORDERING INFORMATION

PART NUMBER	PACKAGE	PACKING STYLE	APPLICATION PART NUMBER ¹
PS7221A-2A	8-pin SOP	Magazine case 45 pcs	PS7221A-2A
PS7221A-2A-F3		Embossed Tape 1500 pcs/reel	
PS7221A-2A-F4			


- Notes:
- 1. For the application of the Safety Standard, following part number should be used.

OUTLINE DIMENSIONS (Units in mm)

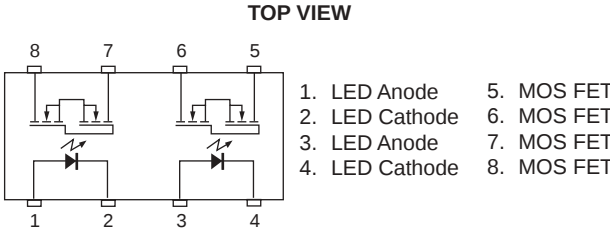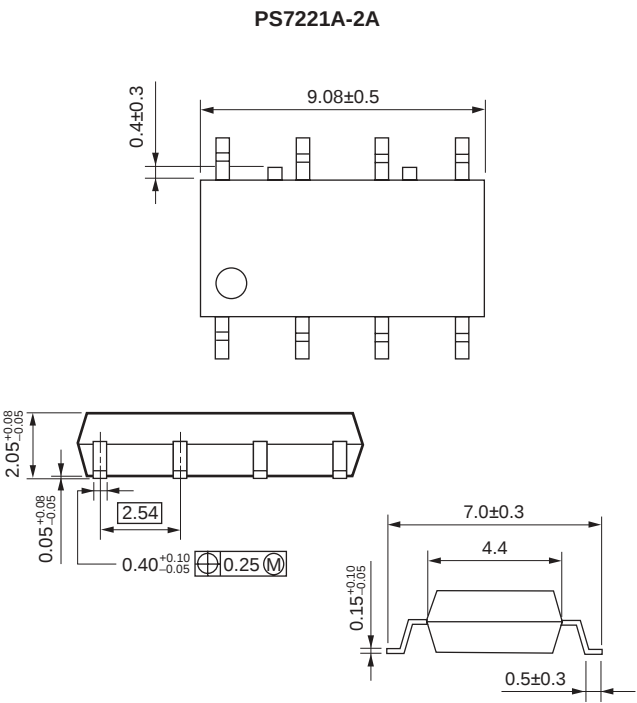


TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$, unless otherwise specified)


MAXIMUM FORWARD CURRENT vs. AMBIENT TEMPERATURE

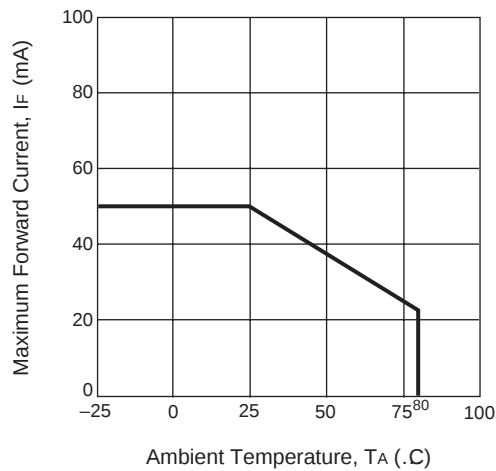


MAXIMUM LOAD CURRENT vs. AMBIENT TEMPERATURE

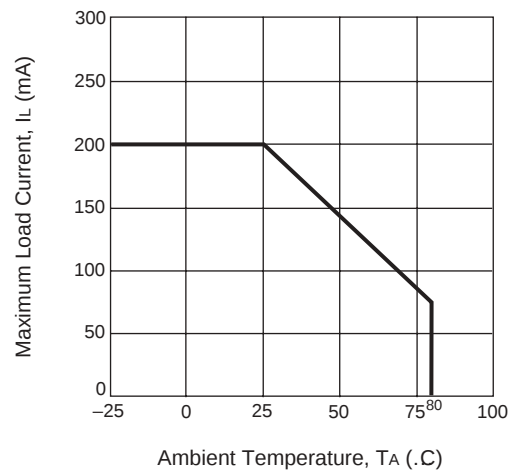


FORWARD VOLTAGE vs. AMBIENT TEMPERATURE

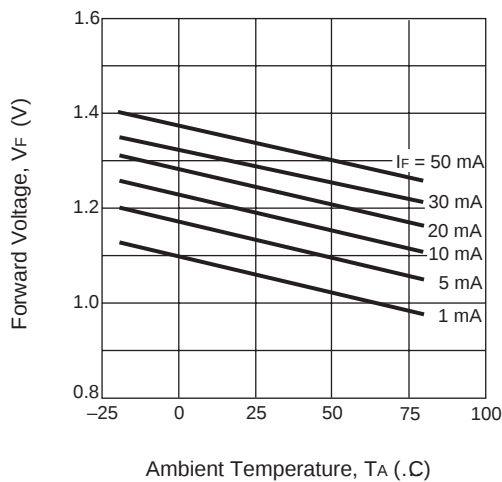


OUTPUT CAPACITANCE vs. APPLIED VOLTAGE

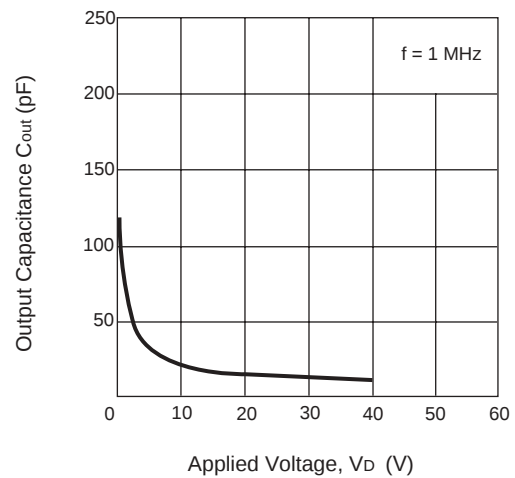

OFF-STATE LEAKAGE CURRENT vs. AMBIENT TEMPERATURE

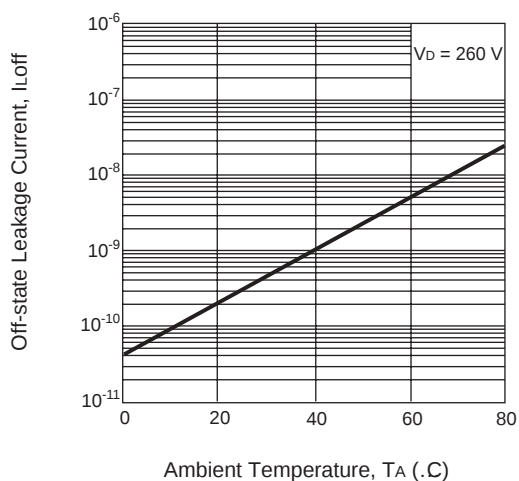


LOAD CURRENT vs. LOAD VOLTAGE

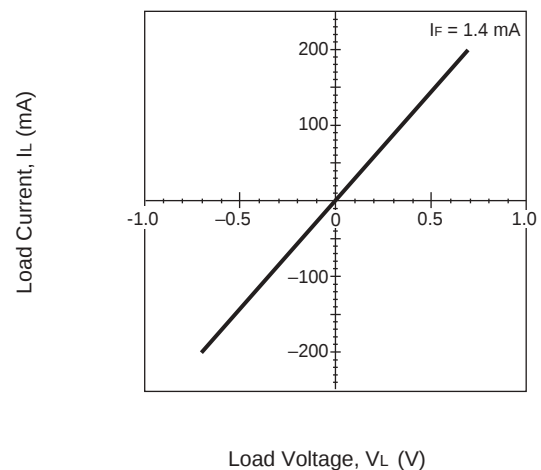


Remarks: The graphs indicate nominal characteristics.

TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$, unless otherwise specified)


NORMALIZED ON-STATE RESISTANCE vs. AMBIENT TEMPERATURE

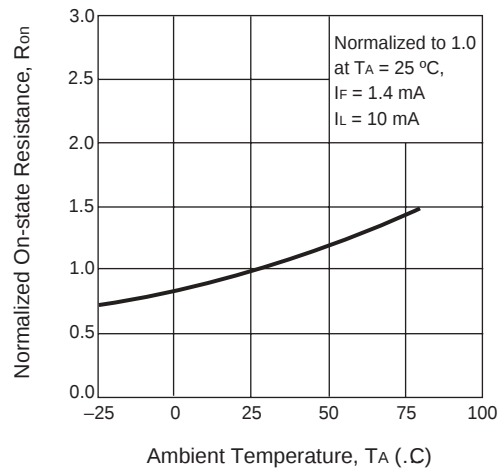


ON-STATE RESISTANCE DISTRIBUTION

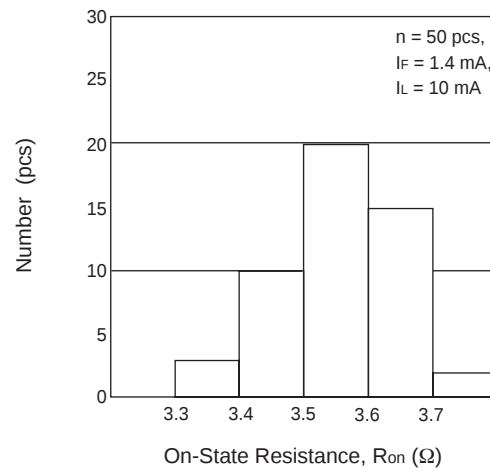


TURN-ON TIME vs. FORWARD CURRENT

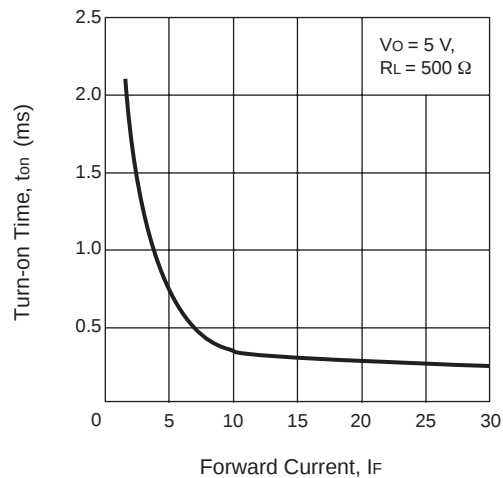


TURN-OFF TIME vs. FORWARD CURRENT

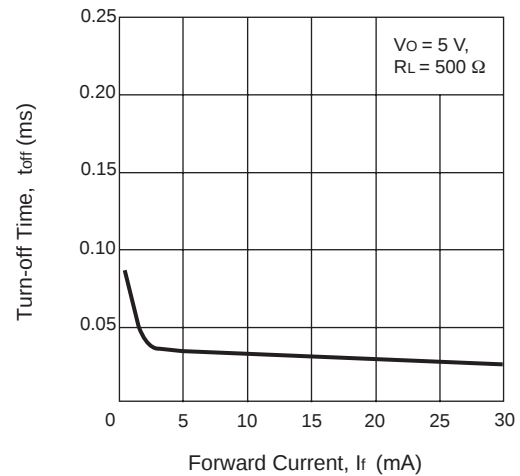

TURN-ON TIME DISTRIBUTION


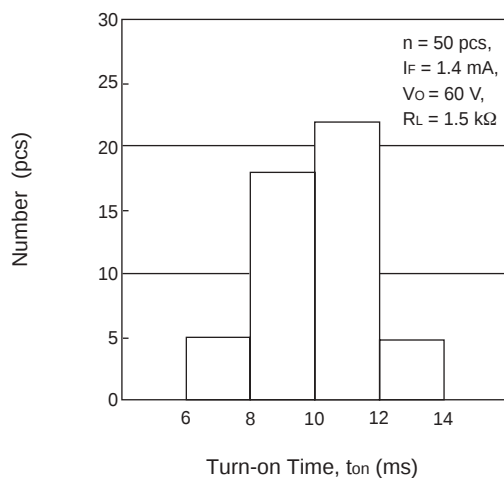


TURN-OFF TIME DISTRIBUTION

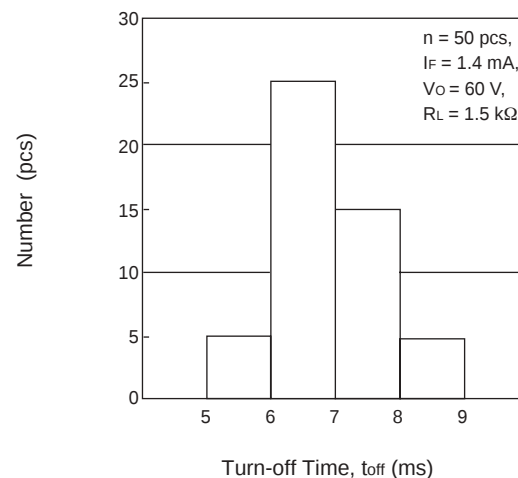


Remarks: The graphs indicate nominal characteristics.

TYPICAL PERFORMANCE CURVES (TA = 25°C)

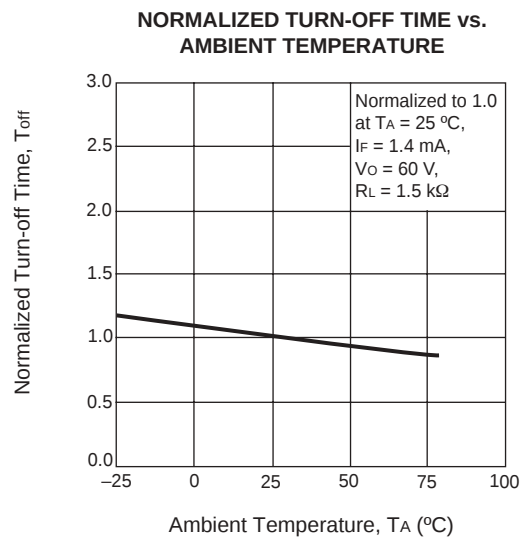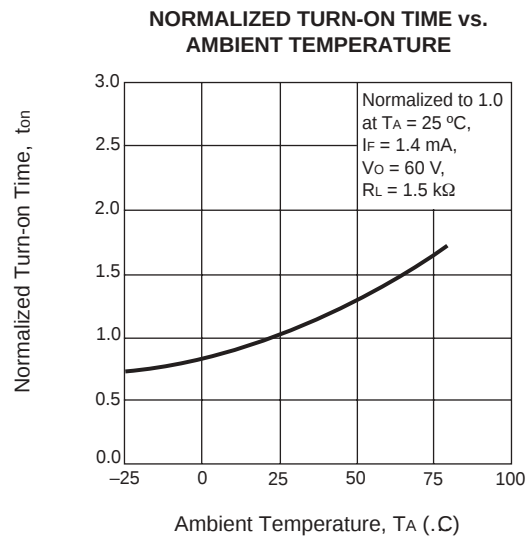


TAPING SPECIFICATIONS (Units in mm)

OUTLINE AND DIMENSIONS (TAPE)

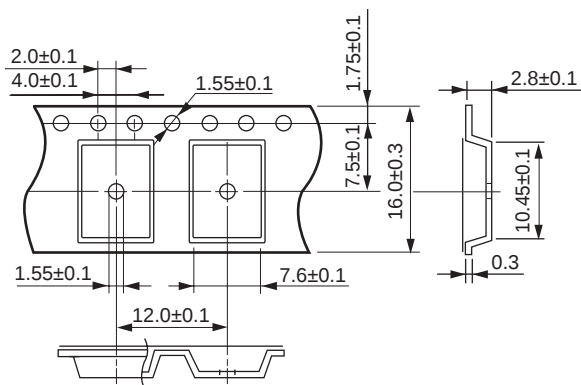


OUTLINE AND DIMENSIONS (REEL)

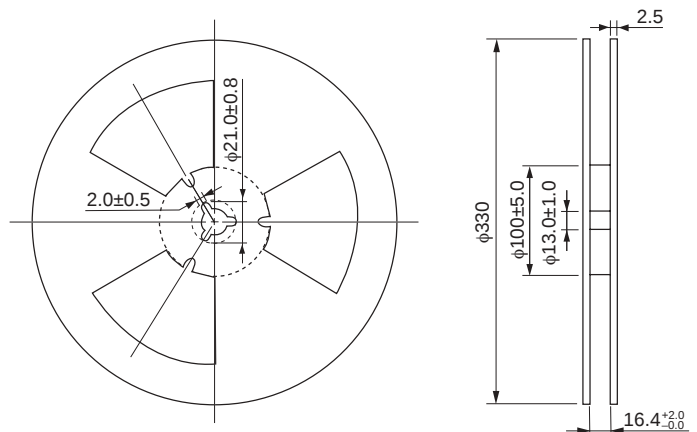

- Notes:
1. Packing : 3500 pcs/reel F3, F4

TAPE DIRECTION

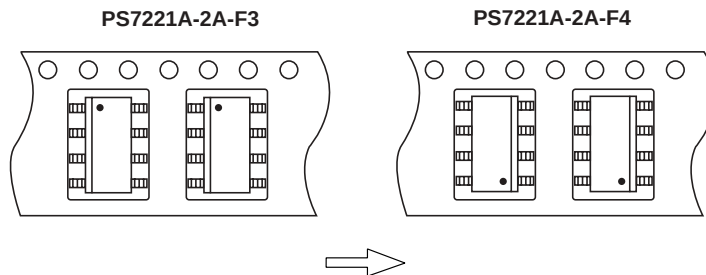


RECOMMENDED SOLDERING CONDITIONS

(1) Infrared reflow soldering

- **Peak reflow temperature**
235 °C (package surface temperature)
- **Time of temperature higher than 210 °C**
30 seconds or less
- **Number of reflows**
Two
- **Flux**
Rosin flux containing small amount of chlorine (The flux with a max. chlorine content of 0.2 Wt % is recommended)

Recommended Temperature Profile of Infrared Reflow

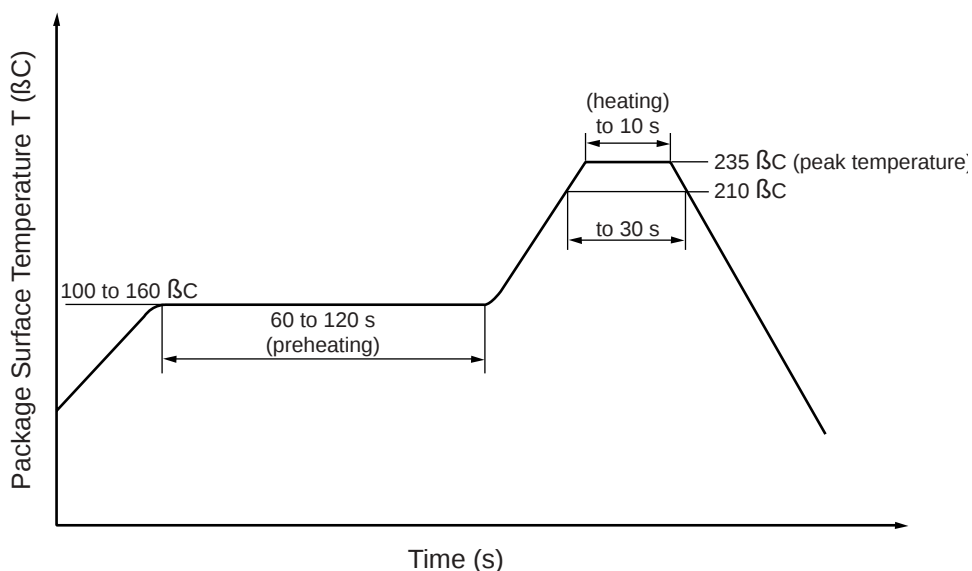


(2) Dip soldering

- **Temperature**
260 °C or below (molten solder temperature)
- **Time**
10 seconds or less
- **Number of times**
One (Allowed to be dipped in solder including plastic mold portion.)
- **Flux**
Rosin flux containing small amount of chlorine (The flux with a max. chlorine content of 0.2 Wt % is recommended.)

(3) Cautions

- **Fluxes**
Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.
Avoid shorting between portion of frame and leads.



* : Portion of frame

EXCLUSIVE NORTH AMERICAN AGENT FOR NEC RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279
DATA SUBJECT TO CHANGE WITHOUT NOTICE

Internet: <http://WWW.CEL.COM>

09/12/2001