



A Business Partner of Renesas Electronics Corporation.
California Eastern Laboratories

2015



APPLICATION BASED

OPTOCOUPLER

DESIGN GUIDE

www.cel.com

RENESAS

Solutions as Easy as 1-2-3

Quickly select the right optocoupler for your application. We made it as simple as **1-2-3** regardless if you are a seasoned engineer or novice.

Simply follow the steps below to find your optocoupler solution:


1. Select your application.
2. Look at the block diagram. Follow the corresponding color coded tables. (See reference tables on back page for series specs.)
3. Answer the questions in the block diagram to determine an orderable part. Visit www.cel.com/Optocouplers for a detailed datasheet.

What is your Application?

- [Switch Mode Power Supply](#)
- [Factory Automation](#)
- [Motor Drive and Control](#)
- [Power Over Ethernet \(PoE\)](#)
- [Power Line Communication \(PLC\)](#)
- [Smart Meters](#)
- [Solar Power](#)


Choose your Application:

Switch Mode Power Supply AC to DC Converter

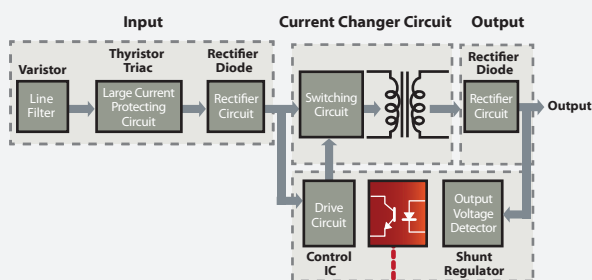


Feedback Control Circuit & DC / DC Converter			
Isolation Voltage	Package	Family	Table
5KVr.m.s.	DIP 4	PS25xx	1
5KVr.m.s.	LSOP 4	PS2381	2
3.75KVr.m.s.	SOP 4	PS27xx	3
2.5KVr.m.s. isolation, 3.75KVr.m.s. for PS2861B	SSOP 4	PS28xx	4
2.5KVr.m.s.	Mini Flat 4	PS2911	6

Data Communication




Power Supplies



Communication Line

Speed	Package	Family	Table
1 Mb/s Analog	DIP 8	PS8501	5

DC to DC Converter




Questions ?

- What Isolation Voltage do you require?
- SMT or Through Hole Package?
- What Operating Temperature do you require?
- What Current Transfer Ratio (CTR) do you require?
- What are your creepage distance requirements?
- What Safety Standards do you require? (UL, VDE, etc.)


Factory Automation

Remote I/O			
Isolation Voltage	Package	Family	Table
5KVr.m.s.	DIP 4	PS25xx	1
5KVr.m.s.	LSOP 4	PS2381	2
3.75KVr.m.s.	SOP 4	PS27xx	3
2.5KVr.m.s. isolation, 3.75KVr.m.s. for PS2861B	SSOP 4	PS28xx	4

Servers

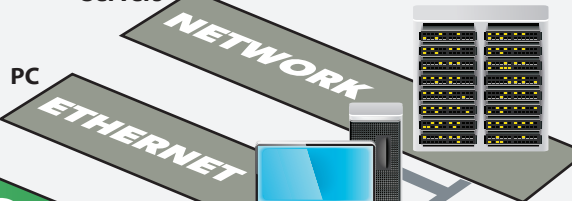

Devices

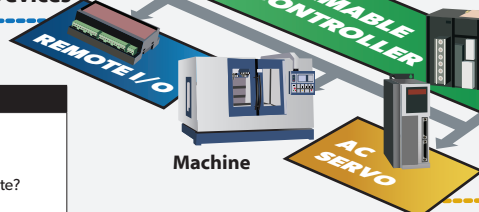

Questions ?

- What Isolation Voltage do you require?
- What Transfer Speed do you require?
- SMT or Through Hole Package?
- How many channels do you need to isolate? (1, 2 or 4 per package)
- What Operating Temperature do you require?
- What are your creepage distance requirements?
- What Safety Standards do you require? (UL, VDE, etc.)

Programmable Logic Controller Input/Output Isolation

Isolation Voltage	Package	Family	Table
2.5KVr.m.s.	SSOP 4	PS28xx	4
1.5KVr.m.s.	SSOP 12	PS2841-4x	4
3.75KVr.m.s.	SOP 4	PS27xx	3
5KVr.m.s.	SOP 4	PS25xx	1

Programmable Logic Controller Communication Isolation

Speed	Package	Family	Table
1 Mb/s Analog	SOP 5	PS8101	5
1 Mb/s Digital	SOP 5	PS9122	5
10 Mb/s Digital	SOP 8	PS9822	5
10 Mb/s Digital	SOP 5	PS9124	5
10 Mb/s Digital	SOP 8	PS9817A	5
10 Mb/s Digital	SDIP 6	PS9324	5
10 Mb/s Digital	LSOP 8	PS9924	5
15 Mb/s Digital	SOP 5	PS9121	5
15 Mb/s Digital	SOP 5	PS9123	5
10 Mb/s Digital	SOP 8	PS9821	5
10 Mb/s Digital	DIP 8	PS9587	5

AC Servo

See motor drive and control application on the following page.



Motor Drive and Control

Power Supply Isolation			
Isolation Voltage	Package	Family	Table
3.75KVR.m.s.	SOP 4	PS27xx	3
2.5KVR.m.s. isolation, 3.75KVR.m.s. for PS2861B	SSOP 4	PS28xx	4

Speed	Package	Family	Table
10 Mb/s Digital	SOP 5	PS9124	<u>5</u>
10 Mb/s Digital	SDIP 6	PS9324	<u>5</u>
10 Mb/s Digital	SOP 8	PS9817A	<u>5</u>
10 Mb/s Digital	LS DIP 8	PS9924	<u>5</u>

Speed	Package	Family	Table
5 Mb/s Digital	SDIP 6	PS9309	<u>8</u>
1 Mb/s Digital	SDIP 6	PS9303	<u>8</u>
1 Mb/s Digital	SOP 5	PS9113	<u>8</u>
1 Mb/s Digital	SDIP 6	PS9313	<u>8</u>
1 Mb/s Digital	DIP 8	PS9513	<u>8</u>

I_o peak (A)	Package	Family	Table
2.5	LS DIP 8	PS9905	7
0.6	SDIP 6	PS9307A	7
2.5	SDIP 8	PS9331	7
2.5	DIP 8	PS9531	7
2.5	SO16	PS9402	7

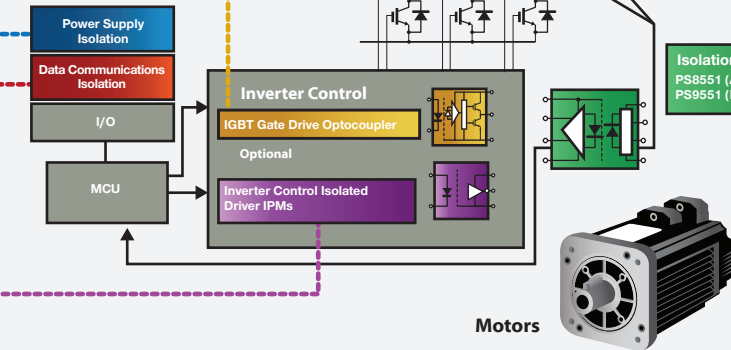


Isolation Voltage	Package	Family	Table
5KVr.m.s.	SDIP 8	PS8551A	9
5KVr.m.s.	SDIP 8	PS9551A	10

Isolation Amplifier
PS8551 (Analog Type)
PS9551 (Digital Type)

Questions ?

- What Isolation Voltage do you require?
- What Transfer Speed do you require?
- SMT or Through Hole Package?
- How many channels do you need to isolate?
(1,2 or 4 per package)
- What Operating Temperature do you require?
- What are your creepage distance requirements?
- What Safety Standards do you require?
(UL, VDE, etc.)

PoE (Power Over Ethernet)

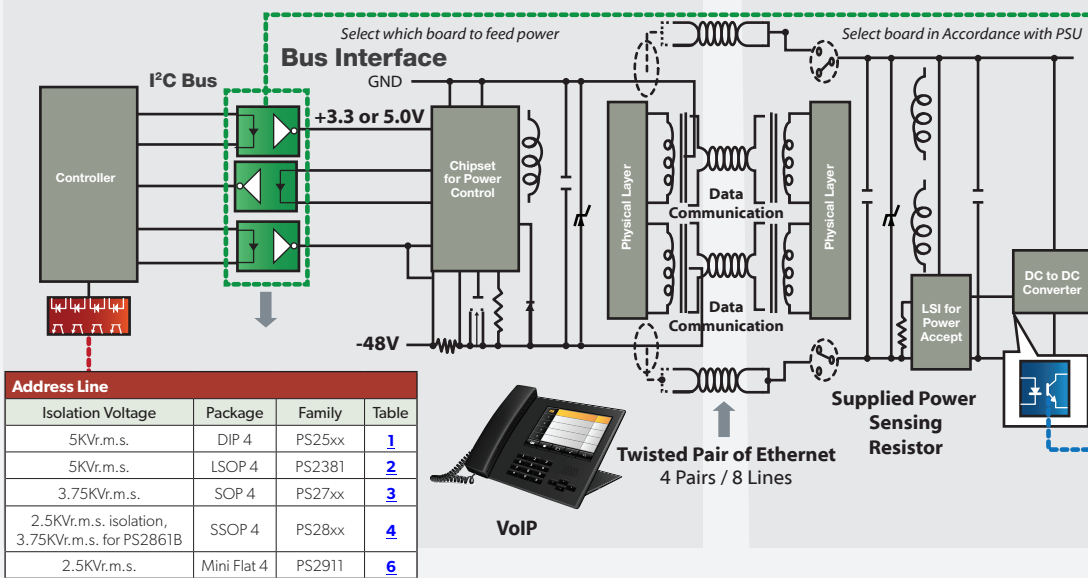


Questions ?

- What Isolation Voltage do you require?
- What Transfer Speed do you require?
- SMT or Through Hole Package?
- How many channels do you need to isolate?
(1,2 or 4 per package)
- What Operating Temperature do you require?
- What are your creepage distance requirements?
- What Safety Standards do you require?
(UL, VDE, etc.)

I ² C Bus			
Speed	Package	Family	Table
1 Mb/s Analog	SOP 8	PS8802	5
1 Mb/s Digital	SOP 5 SOP 8	PS9122 PS9822	5
15 Mb/s Digital	SOP 5 SOP 5 SOP 8	PS9121 PS9123 PS9821	5

Feedback for DC to DC Converter			
Isolation Voltage	Package	Family	Table
5KVr.m.s.	DIP 4	PS25xx	1
5KVr.m.s.	LSOP 4	PS2381	2
3.75KVr.m.s.	SOP 4	PS27xx	3
2.5KVr.m.s. isolation, 3.75KVr.m.s. for PS2861B	SSOP 4	PS28xx	4
2.5KVr.m.s.	Mini Flat 4	PS2911	6

PLC (Power Line Communication)

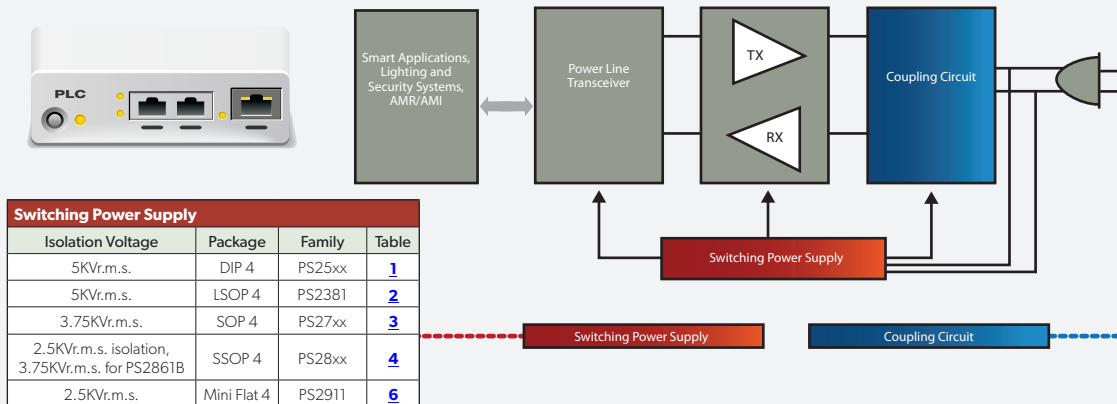

Questions ?

- What Isolation Voltage do you require?
- What Transfer Speed do you require?
- SMT or Through Hole Package?
- What is your Operating Voltage?
- What Operating Temperature do you require?
- What are your creepage distance requirements?
- What Safety Standards do you require?
(UL, VDE, etc.)



Coupling Circuit			
Vcc	Package	Family	Table
3.3V & 5V	SOP 5	PS9124	<u>5</u>
5V	SOP 5	PS9123	<u>5</u>
5V	SOP 8	PS9817A	<u>5</u>
3.3V	SOP 8	PS9821	<u>5</u>

Smart Meters

Isolation between Calibration and DSP			
Isolation Voltage	Package	Family	Table
5KVr.m.s.	DIP 4	PS2561D	1

High Speed Isolation between MCU and RS485			
Speed	Package	Family	Table
10 Mb/s Digital	SOP 5	PS9124	5
10 Mb/s Digital	SDIP 6	PS9324	5

Isolation between MCU and clock output			
Isolation Voltage	Package	Family	Table
5KVr.m.s.	DIP 4	PS2561D	1

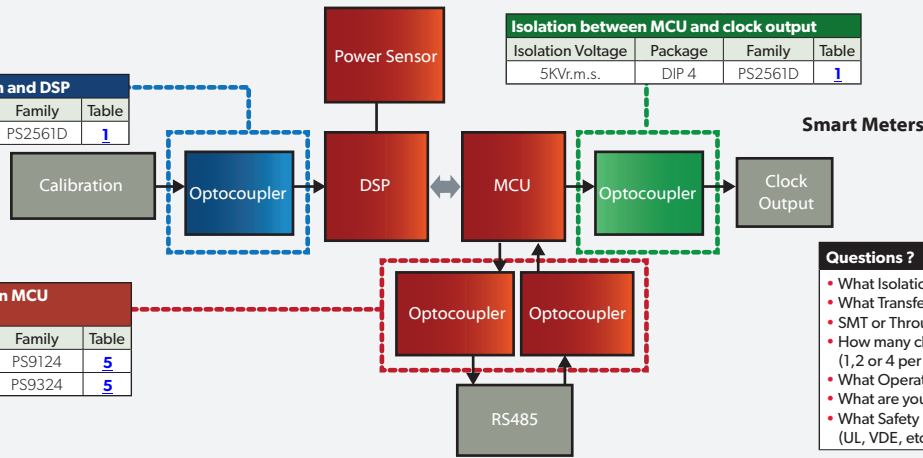


Questions ?

- What Isolation Voltage do you require?
- What Transfer Speed do you require?
- SMT or Through Hole Package?
- How many channels do you need to isolate? (1,2 or 4 per package)
- What Operating Temperature do you require?
- What are your creepage distance requirements?
- What Safety Standards do you require? (UL, VDE, etc.)

Solar Power

Home System Solar Cell

Plant / Building System

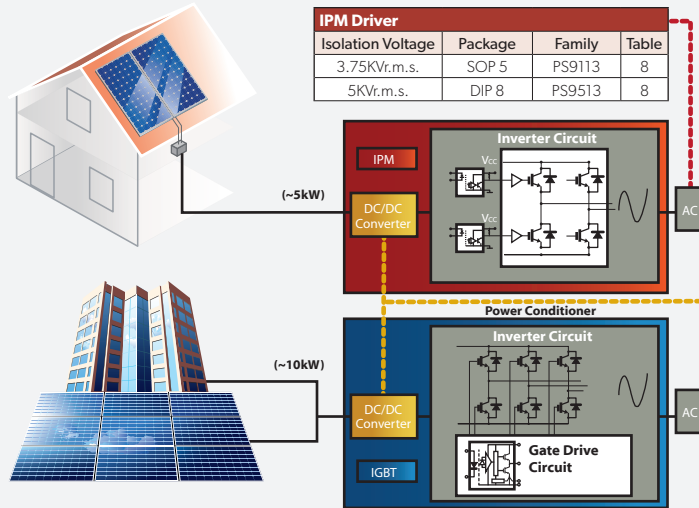

IPM Driver			
Isolation Voltage	Package	Family	Table
3.75KVr.m.s.	SOP 5	PS9113	8
5KVr.m.s.	DIP 8	PS9513	8

Feedback Control Circuit in DC/DC Converter			
Isolation Voltage	Package	Family	Table
5KVr.m.s.	DIP 4	PS2561D	1


IGBT Gate Driver			
I _o peak (A)	Package	Family	Table
2.5	DIP 8	PS9905	7
0.6	SDIP 6	PS9307A	7
2.5	SDIP 8	PS9331	7
2.5	DIP 8	PS9531	7
0.6	DIP 8	PS9506	7

Questions ?

- What Isolation Voltage do you require?
- What Transfer Speed do you require?
- SMT or Through Hole Package?
- How many channels do you need to isolate? (1,2 or 4 per package)
- What Operating Temperature do you require?
- What are your creepage distance requirements?
- What Safety Standards do you require? (UL, VDE, etc.)

Part Numbering System

Note: This diagram is intended to explain existing part numbers and is not to be used to create part numbers since NOT all combinations are available.

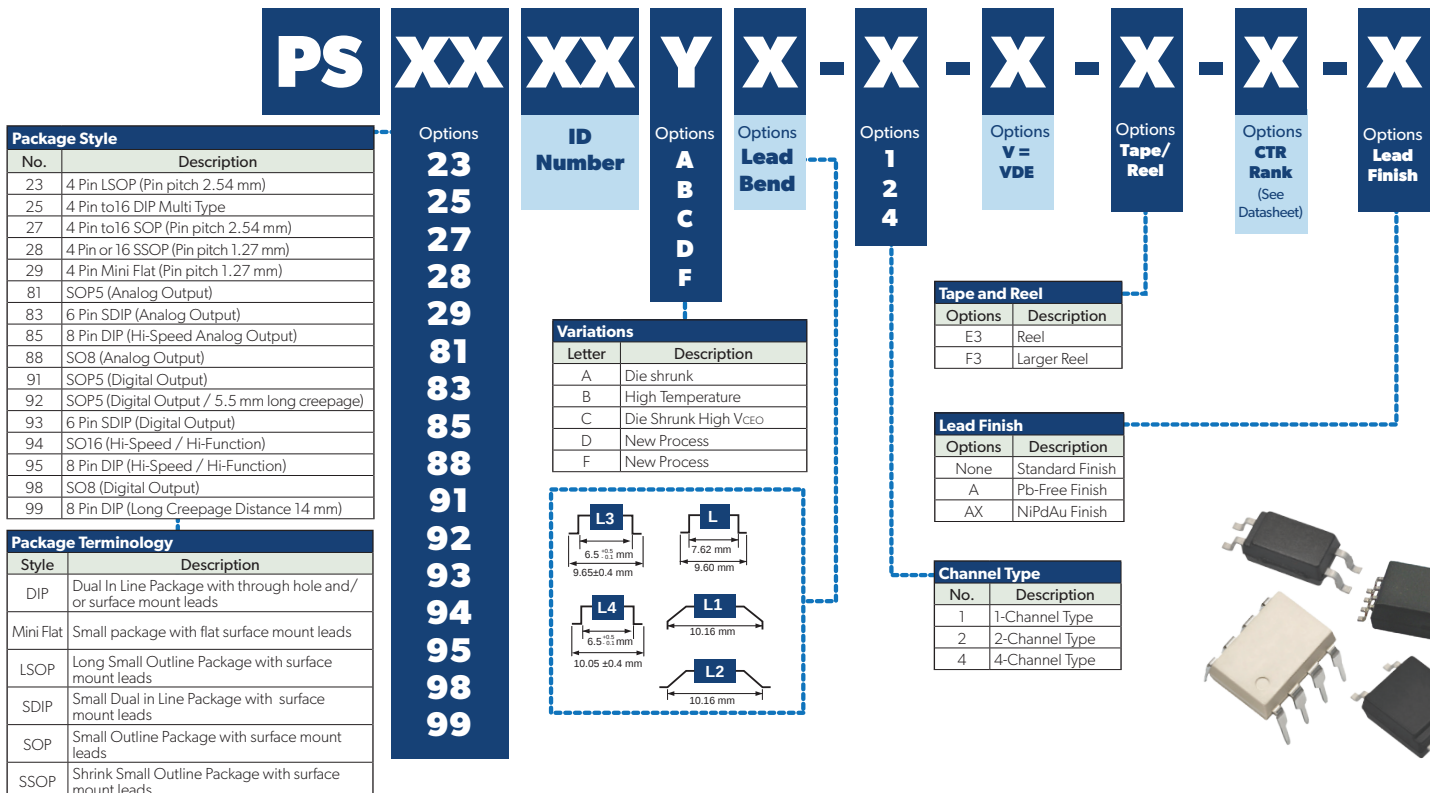

Reference Tables

Bold* = Focus Products

Table 1	Root Part	Input	Output	Operating Temperature Range (°C)		V _{CEO} Max (V)	I _F Max (mA)	CTR (%)	CTR Rank Available	Comments	
	PS2561D *	DC	Standard	-55 to +110		80	40	50-400	Yes	Low cost version of PS2561B, PS2501 and PS2501A, High temp	
	PS2514	DC	Standard	-55 to +100		40	30	50-200	Yes	Standard	
	PS2561F	DC	Standard	-55 to +110		80	30	300-600	No	Low cost version of PS2501-1-K, High temp	
Table 2	Root Part	Input	Output	Operating Temperature Range (°C)		V _{CEO} Max (V)	I _F Max (mA)	CTR (%)	CTR Rank Available	Comments	
	PS2381 *	DC	Standard	-40 to +115		80	60	50-450	Yes	Stretched package, high temp operation	
Table 3	Root Part	Input	Output	Operating Temperature Range (°C)		V _{CEO} Max (V)	I _F Max (mA)	CTR (%)	CTR Rank Available	Comments	
	PS2761B *	DC	Standard	-55 to +110		70	25	50-400	Yes	High temp, low cost version of PS2701 and PS2701A	
	PS2711	DC	Standard	-55 to +100		40	50	100-400	Yes	Low Input Current	
	PS2701A	DC	Standard	-55 to +100		70	30	50-300	Yes	Low cost version of PS2701	
	PS2705A	AC	Standard	-55 to +100		80	±30	50-300	Yes	AC Input	
Table 4	Root Part	Input	Output	Operating Temperature Range (°C)		V _{CEO} Max (V)	I _F Max (mA)	CTR (%)	CTR Rank Available	Comments	
	PS2801C *	DC	Standard	-55 to +100		80	30	50-400	Yes	Low cost version of PS2801	
	PS2861B	DC	Standard	-55 to +110		70	50	50-400	No	High temp version of PS2801 and PS2801C	
	PS2811	DC	Standard	-55 to +100		40	50	100-400	Yes	Low Input Current	
	PS2805C	AC	Standard	-55 to +100		80	±30	50-400	Yes	AC input	
	PS2841-4x	x=A common cathode x=B common anode	Common Collector	-40 to +100		70	20	100-400	No	Ultra SSOP, quad channel with 12 leads	
Table 5	Root Part	Type		Speed	Operating Temperature Range (°C)	Package	Isolation Voltage (Vr.m.s.)	CMR (KV/μS)	V _{CC} Max (V)	V _{CC} TYP (V)	Comments
	PS8501 *	High Speed / High Function		1 Mbps	-55 to +100	8 pin DIP	5K	-	35	-	8mm creepage, 8 pin DIP
	PS9122 *	High Speed / High Function		1 Mbps	-40 to +100	5 pin SOP	3.75K	±15	7	3.3 or 5	3.3V & 5V versions, Open Collector
	PS9124 *	High Speed / High Function		10 Mbps	-40 to +100	5 pin SOP	3.75K	±15	7	3.3 or 5	3.3V & 5V versions, Low Distortion
	PS9821 *	High Speed / High Function		15 Mbps	-40 to +85	SO8	2.5K	±15	7	3.3	3.3V, Low Distortion
	PS9324L/L2 *	High Speed / High Function		10 Mbps	-40 to +110	6 pin SDIP	5k	±15	7	3.3 or 5	3.3V & 5V versions, Open Collector, Low Distortion
	PS9123 *	High Speed / High Function		15 Mbps	-40 to +100	5 pin SOP	3.75K	±15	7	5	Totem Pole Output, Low Distortion
	PS8101	High Speed / High Function		1 Mbps	-55 to +100	5 pin SOP	3.75K	±15	35	-	High CMR analog output
	PS9924	High Speed / High Function		10 Mbps	-40 to +100	LS DIP	7.5K	±15	7	3.3 or 5	3.3V & 5V, 14mm creepage
	PS8802	High Speed / High Function		10 Mbps	-55 to +100	SO8	2.5K	±10	35	5	High CMR analog output
	PS9822	High Speed / High Function		1 Mbps	-40 to +100	SO8	2.5K	±20	7	3.3 or 5	3.3V & 5V versions, Open Collector
	PS9121	High Speed / High Function		15 Mbps	-40 to +85	5 pin SOP	3.75K	±15	7	3.3	3.3V, Low Distortion
	PS9817A	High Speed / High Function		10 Mbps	-40 to +85	SO8	2.5K	±15	7	5	5V, Low Distortion
	PS9317	High Speed / High Function		10 Mbps	-40 to +85	6 pin SDIP	5K	±15	7	5	8mm creepage, 6 pin SDIP
PS9587	High Speed / High Function		10 Mbps	-40 to +85	8 pin DIP	5K	±15	7	5	8mm creepage, 8 pin DIP	
PS9851	High Speed / High Function		15 Mbps	-40 to +100	SO8	2.5K	±10	5.5	5	5V, 100°C max operating temp	
Table 6	Root Part	Input	Output	Operating Temperature Range (°C)		V _{CEO} Max (V)	I _F Max (mA)	CTR (%)	CTR Rank Available	Comments	
	PS2911 *	DC	Standard	-55 to +100		40	50	100 - 400	Yes	Ultra small flat-lead package	
Table 7	Root Part	Input	t _{PLH} / t _{PHL} (μS)	Operating Temperature Range (°C)		Isolation Voltage (Vr.m.s.)	I _F Max (mA)	CMR (KV/μS)	V _{CC} Max (V)	Comments	
	PS9905 *	DC	0.25	-40 to +110		7.5K	25	±25	30	14mm Long creepage, 8 pin LSDIP	
	PS9307A *	DC	0.150	-40 to +125		5K	25	±50	35	6 pin SDIP	
	PS9531 *	DC	0.175	-40 to +125		5K	25	±50	35	UVLO (Under Voltage Lock Out) protection with hysteresis	
	PS9402 *	DC	0.2	-40 to +110		5K	25	±25	33	Fault detection (desaturation detection, UVLO protection and active Miller clamping)	
	PS9506	DC	0.4	-40 to +110		5K	25	±25	30	8mm creepage option available	
	PS9331	DC	0.175	-40 to +125		5K	25	±50	33	UVLO (Under Voltage Lock Out) protection with hysteresis	
Table 8	Root Part	Input	t _{PLH} / t _{PHL} (nS)	Operating Temperature Range (°C)		Isolation Voltage (Vr.m.s.)	I _F Max (mA)	CMR (KV/μS)	V _{CC} Max (V)	Comments	
	PS9309 *	DC	250/250	-40 to +110		5K	20	±15	20	5 Mbps Totem Pole output type, 6 pin SDIP, IPM driver	
	PS9303	DC	500/550	-40 to +110		5K	20	±15	25	1 Mbps Totem Pole output type, 6 pin SDIP, IPM driver	
	PS9113	DC	750/500	-40 to +110		3.75K	25	±15	25	1 Mbps, open collector output, 5 pin SOP (SO5) IPM driver	
	PS9313	DC	750/500	-40 to +110		5K	25	±15	25	1 Mbps, open collector output, 8mm creepage 6 pin SDIP IPM driver	
	PS9513	DC	750/500	-40 to +100		5K	30	±15	25	1 Mbps, open collector output, 8mm creepage 8 pin DIP IPM driver	
Table 9	Root Part	Operating Temperature Range (°C)		Bandwidth TYP (kHz)	Input Supply ^{DO1} Max (mA)	Output Supply ^{DO2} Max (mA)	Gain v/v TYP	Gain Error (%)	CMR (KV/μS)	Comments	
	PS8551A *	-40 to +105		100	16	16	8	±1	±10	High CMR analog output isolation amplifier	
Table 10	Root Part	Operating Temperature Range (°C)		V _{CC} Max (V)	V _{CC} Range Recommended (V)	Input Supply ^{DO1} Max (mA)	Output Supply ^{DO2} Max (mA)	ENOB (Bits Min)	Output Clock Frequency (MHz Typ)	Comments	
	PS9551A	-40 to +105		5.5	4.5 to 5.5	18	15	10	10	High CMR digital ouptut isolation amplifier, sigma-delta modulator	



A Business Partner of Renesas Electronics Corporation.

California Eastern Laboratories



CEL Headquarters

4590 Patrick Henry Drive
Santa Clara, CA 95054
Tel: (408) 919-2500
E-mail: oc@cel.com



Learn more
www.cel.com/optocouplers



For a complete list of sales offices, representatives and distributors,
Please visit our website: www.cel.com/contactus