



Features

- Carbon element
- Metal housing
- 45-100 mm travel
- Single and dual gang
- Dust cover option
- RoHS compliant*



PTB Series - Low Profile Slide Potentiometer

Electrical Characteristics

Taper..... Linear, audio
 Standard Resistance Range
5K ohms to 200K ohms
 Standard Resistance Tolerance..... $\pm 20\%$
 Residual Resistance
500 ohms or 1 % max.
 Insulation Resistance
 Min. 100 megohms at 250 V DC


Environmental Characteristics

Operating Temperature
 -10°C to $+60^{\circ}\text{C}$
 Power Rating, Linear
 45 mm0.125 W (0.06 W Dual Gang)
 60 mm0.25 W (0.125 W)
 100 mm0.5 W (0.5 W)
 Power Rating, Audio
 45 mm ..0.025 W (0.015 W Dual Gang)
 60 mm0.25 W (0.125 W)
 100 mm0.25 W (0.25 W)
 Maximum Operating Voltage - Linear
 45 mm350 VDC
 60-100 mm500 VDC
 Maximum Operating Voltage - Audio
 45 mm250 VDC
 60-100 mm Travel350 VDC
 Withstand Voltage, Audio
1 Min. at 500 V AC
 Tracking Error.....3 dB at 50 % of travel

Mechanical Characteristics




Operating Force10 to 100 g-cm
 Stop Strength5 kg-cm min.
 Sliding Life.....15,000 cycles
 Soldering Condition
 300°C max. within 3 seconds
 Travel45, 60, 100mm

Derating Curve

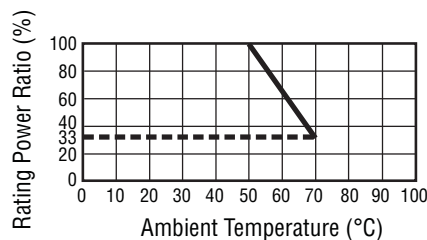


Product Dimensions

PTB45 and PTB60

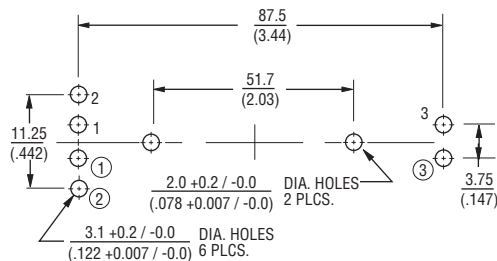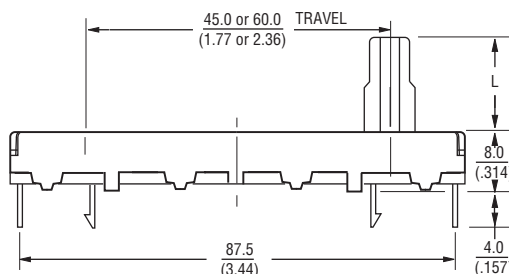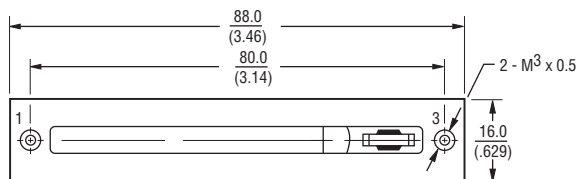


Numbers ①, ② and ③ for Dual Gang Versions

Lever Style
 BP Metal Lever



Thickness = 1.2 mm

AP Metal Lever

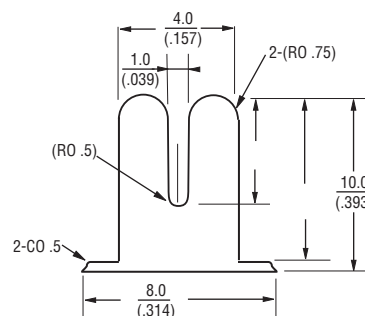

Thickness = 1.2 mm

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.



Applications

- Audio/TV sets
- Car radio
- Amplifiers/mixers/drum machines/synthesizers
- PCs/monitors
- Appliances

PTB Series - Low Profile Slide Potentiometer

BOURNS®

Product Dimensions

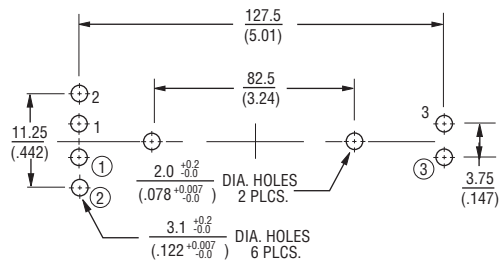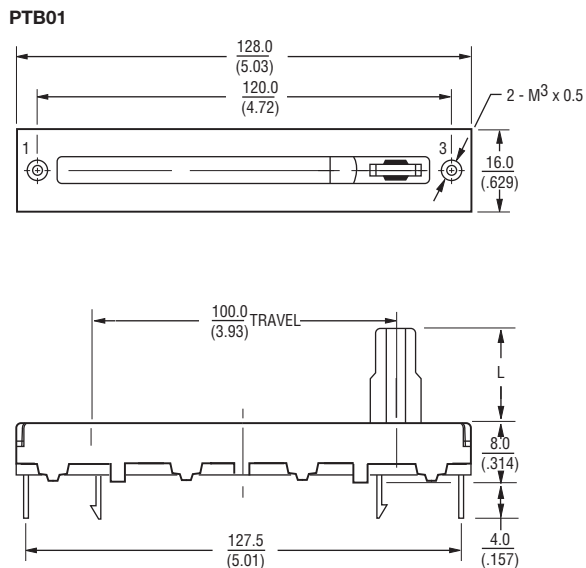

Numbers ①, ② and ③ for Dual Gang Versions

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

How To Order

PTB 01 4 3 - 2 0 10 BP A 102

Model

Stroke Length

- 45 = 45 mm
- 60 = 60 mm
- 01 = 100 mm

Dust Cover Option

- 4 = No Dust Cover
- 5 = Rubber Dust Cover

No. of Gangs

- 3 = Single Gang
- 4 = Dual Gang

Pin Style

- 2 = PC Pins Down Facing

No Detent

Standard Lever Length

- 10 = 10 mm

Lever Style

- BP = Metal Lever (Refer to Drawing)
- AP = Metal Lever (Refer to Drawing)

Resistance Taper

- A = Audio Taper
- B = Linear Taper

Resistance Code (See Table)

Other styles available.

Standard Resistance Table

Resistance (Ohms)	Resistance Code
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204

REV. 01/14

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[PTB0143-2010BPA103](#) [PTB0143-2010BPB103](#) [PTB0144-2010BPB103](#) [PTB6043-2010BPB103](#) [PTB6044-2010BPA104](#) [PTB6053-2010APB103](#) [PTB6053-2010BPB103](#) [PTB0143-2010BPA502](#) [PTB0144-2010BPA103](#) [PTB0153-2010BPB204](#) [PTB4543-2010APB103](#) [PTB6044-2010BPA103](#) [PTB6053-2010BPA203](#) [PTB6043-2010BPA103](#) [PTB0153-2010BPB103](#)