





- ⬢ Sealed to IP66 IP68 and IP69K when mated
- ⬢ IP68 rating tested at 1.054kg/sq cm (15lb/sq in) 10m depth for 2 weeks
- ⬢ 3, 8 & 12 pole configuration
- ⬢ Power ratings up to 13A, 600V
- ⬢ Cable range from 3 to 7mm
- ⬢ Diameter over coupling ring 19.7mm
- ⬢ Flex, Flex In-Line, Rear Panel and PCB mounting body styles
- ⬢ Colour coded O-rings & washers for easy identification purposes
- ⬢ Plug and Socket versions in all body styles
- ⬢ Flame Retardant moulding material - Polyamide UL94-V0
- ⬢ Contacts supplied separately (except PCB versions)
- ⬢ Sealing caps available to maintain IP68 rating
- ⬢ Crimp and solder contacts
- ⬢ UL, CSA and VDE approvals
- ⬢ EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1
- ⬢ EN60068-2-64 Vibration Resistance

Flex Cable Connector



PXP4010

- Mates with Flex In-line or Panel mounting versions PXP4011, PXP4013
- Pin or socket
- 3, 8, or 12 pole
- ¼ turn locking ring
- Contacts supplied separately




Inline Flex Cable Connector



PXP4011

- Mates with Flex Cable connector PXP4010
- Pin or socket
- 3, 8, or 12 pole
- For in-line cable connection
- Contacts supplied separately




Rear Panel Mounting Connector



PXP4013

- Mates with Flex Cable connector PXP4010, PXP4011
- Rear Panel mounting
- Pin or socket
- Single hole fixing
- Contacts supplied separately
- 3, 8 or 12 pole

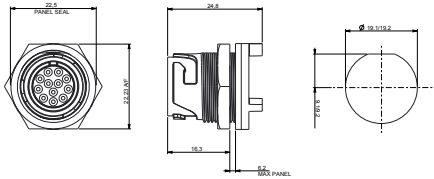


PCB Mounting Connector



PXP4013/XXX/PC

- Mates with Flex Cable connector PXP4010, PXP4011
- Pin or socket
- PCB Rear Panel mounting
- Straight PC spills
- Supplied with pre-loaded gold plated contacts
- 3, 8, or 12 pole

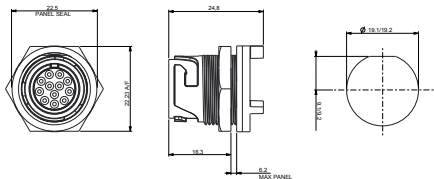

Sealing Caps and Accessories



PXP4081 PXP4082 PXP4083

- Maintains IP-sealed rating of unmated connectors

Part no.	Description
PXP4081	Sealing cap for use with PXP4010 & PXP4040
PXP4082	Sealing cap for use with PXP4011
PXP4083	Sealing cap for use with PXP4013 & PXP4043

Gland Packs



Part no.	Description
PXP4088/0305	Pack of 4 pairs cable glands and collets to suit cables from 3.0 to 5.0mm diameter.
PXP4088/0507	Pack of 4 pairs cable glands and collets to suit cables from 5.0 to 7.0mm diameter.

O-ring & washer pack



Part no.	Description
PXP4089/WH	White coloured O-ring and washer pack
PXP4089/RD	Red coloured O-ring and washer pack
PXP4089/BL	Blue coloured O-ring and washer pack
PXP4089/YL	Yellow coloured O-ring and washer pack
PXP4089/GN	Green coloured O-ring and washer pack

Crimp Contacts

Pole	Current Rating	Pin	Socket	Pack Qty	Cable Acceptance (dia)
3	13A /*10A	SA3350	SA3349	10	16 - 18 AWG
8	8A /*4A	SA3348	SA3347	10	18 - 20 AWG
12	3A /*2A	SA3180	SA3179	10	22 - 24 AWG

Solder Contacts

Pole	Current Rating	Pin	Socket	Pack Qty	Cable Acceptance (dia)
3	13A /*10A	SA3350/1	SA3349/1	10	16 - 18 AWG
8	8A /*4A	SA3348/1	SA3347/1	10	18 - 20 AWG
12	3A /*2A	SA3180/1	SA3179/1	10	22 - 24 AWG

Insertion / Extraction

	Poles	Contact Rating	Colour	Part No
Insertion/Extraction Tool	3	13A /*10A	Blue	13027/2
Insertion/Extraction Tool	8	8A /*4A	Red	13027/1
Insertion/Extraction Tool	12	3A /*2A	Green	13027


Crimp tools

	Poles	Contact Rating	Colour	Part No
Positioner	3	13A /*10A	Orange	14025/1618
Positioner	8	8A /*4A	Grey	14025/1820
Positioner	12	3A /*2A	Yellow	14025/2224
8 Indent Crimp Tool for use with positioners				14025

PXP4013 PCB Contact Layout



Sockets

Contact numbers viewed from rear of panel




Plugs


Contact numbers viewed from rear of panel



3 pole
(13 Amp)



8 pole
(8 Amp)



12 pole
(3 Amp)

*Current rating for CSA standards

Electrical:

No. Poles:	3	8	12
Current Rating UL / VDE:	13A	8A	3A
Current Rating CSA:	10A	5A	3A
Voltage Rating (ac/dc):	600Vac/dc	600Vac/dc	600Vac/dc
Contact Resistance:	<5mΩ		
Insulation Resistance:	>10 ⁶ MΩ (@ 500V d.c.)		
AC Breakdown voltage:	2.5kV		

Operating Temperature:
 Flex and panel types -40°C to +120°C

Approvals:

 UL
 CSA
 VDE

Material:

Flex and panel types:
 Body Mouldings: Polyamide
 Flammability Rating: UL94V-0
 UV Resistance: To EN 50021:1999

Contacts: Copper alloy, Gold plated

O Rings: Silicone

Panel Sealing O Ring: Silicone

 Compliant

Mechanical:

Sealing: IP66 to En60529:1992+A2:2013
 IP68 to En60529:1992+A2:2013 (10m depth for 2 weeks)
 IP69k to DIN 40050-9

IP69K, Tested in accordance with DIN 40050/Part 9 IP6k9k

Salt Mist: EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1

Vibration: BS EN 60068-2-64:2008 Test Fh
 BS EN 60068-2-27:2009 Test Ea

Cable Acceptance: 3.0 - 7.0mm

Contact Accommodation: 3 pole, 16 - 18 AWG
 8 pole, 18 - 20 AWG
 12 pole, 22 - 24 AWG

Termination: Crimp, solder and PCB

Insertion/Withdrawal Force:
 No. poles: 3 8 12
 Insertion Force (typ): 25N 28N 62N
 Withdrawal Force (typ): 17N 22N 29N

Panel mount (PXP4013)
 Front fixing nut: 1.0-1.1Nm (9lbf.in.)

Cable Retention force:
 3.0mm dia 60N
 4.0 to 7.0mm dia 80N

Panel thread PXP4013: 18.97x26TPI Whitworth form to BS84 med fit

Dimensions:

Overall dimensions of connectors when mated together

Flex + Flex In-Line 80mm
 Dia. over coupling ring 19.7mm

PXP40 xx	/	XX	/	X	/	XXXX
Body Styles PXP4010 = Flex body PXP4011 = Flex in-line body PXP4013 = Rear panel/PCB mounting body		Number Contacts 03 = 3 pole, 08 = 8 pole, 12 = 12 pole,		Contact Type P = Pin, S = Socket		For PXP4010 and PXP4011 cable connectors - Cable Entry Size: 3035 = 3.0 - 3.5mm (Light Grey) 3540 = 3.5 - 4.0mm (Grey) 4045 = 4.0 - 4.5mm (Green) 4550 = 4.5 - 5.0mm (Red) 5055 = 5.0 - 5.5mm (Yellow) 5560 = 5.5 - 6.0mm (Blue) 6065 = 6.0 - 6.5mm (White) 6570 = 6.5 - 7.0mm (Black) Cable gland and collet supplied in colour coded pairs. For PXP4013 PCB/Rear Panel Mount: PC = Pre-loaded PC pins Blank = no pins supplied
Examples: PXP4010/03S/4045 = Flex cable connector, 3 socket contacts with gland and collet for cables between 4.0 and 4.5mm diameter (supplied less contacts). PXP4013/08P = Rear panel mounting connector, for 8 pin contacts (supplied less contacts). PXP4013/03P/PC = Rear panel/PCB connector, 3 pin contacts, PCB mounting (supplied with contacts loaded).						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bulgin:

[PXP4010/03S/5055](#) [PXP4011/12P/3035](#) [PXP4011/08S/5560](#) [PXP4010/08P/4045](#) [PXP4013/08P](#) [PXP4089/GN](#)
[PXP4010/03P/5055](#) [PXP4011/03P/5055](#) [PXP4011/12P/5560](#) [PXP4011/12P/6065](#) [PXP4010/03P/5560](#) [PXP4013/08S](#)
[PXP4013/12S](#) [PXP4013/12S/PC](#) [PXP4010/12S/3540](#) [PXP4081](#) [PXP4010/03P/4550](#) [PXP4010/12P/4045](#)
[PXP4011/03P/3540](#) [PXP4010/12P/3540](#) [PXP4011/12P/6570](#) [PXP4010/03P/6065](#) [PXP4010/08S/6570](#)
[PXP4010/12S/4045](#) [PXP4011/03P/4550](#) [PXP4011/03P/3035](#) [PXP4011/08P/6570](#) [PXP4010/03S/6570](#) [PXP4088/0507](#)
[PXP4013/03S/PC](#) [PXP4011/08S/6065](#) [PXP4011/08P/3540](#) [PXP4011/12S/5055](#) [PXP4011/12S/6570](#)
[PXP4011/03S/5055](#) [PXP4010/12S/4550](#) [PXP4010/08P/3540](#) [PXP4010/12P/4550](#) [PXP4010/08P/5055](#)
[PXP4010/03S/3540](#) [PXP4011/03P/6065](#) [PXP4010/03P/6570](#) [PXP4011/12S/5560](#) [PXP4088/0305](#) [PXP4011/03P/4045](#)
[PXP4011/08S/3540](#) [PXP4011/08P/5560](#) [PXP4011/03S/4550](#) [PXP4011/12S/4045](#) [PXP4011/08S/4550](#)
[PXP4010/12P/6570](#) [PXP4010/08P/5560](#) [PXP4010/12P/3035](#) [PXP4011/03S/3540](#) [PXP4010/08S/3540](#)
[PXP4011/08S/3035](#) [PXP4010/08S/5560](#) [PXP4010/12S/5055](#) [PXP4010/08S/3035](#) [PXP4011/08S/4045](#)
[PXP4011/08P/6065](#) [PXP4082](#) [PXP4011/03S/4045](#) [PXP4010/03S/6065](#) [PXP4010/12S/6570](#) [PXP4010/03S/4550](#)
[PXP4010/08P/6570](#) [PXP4011/12P/3540](#) [PXP4010/03P/4045](#) [PXP4089/YL](#) [PXP4010/08S/5055](#) [PXP4011/12P/4550](#)
[PXP4011/12S/4550](#) [PXP4013/03P](#) [PXP4010/08P/4550](#) [PXP4013/03S](#) [PXP4011/03S/3035](#) [PXP4011/12S/3035](#)
[PXP4013/12P/PC](#) [PXP4011/08P/4045](#) [SA2405](#) [PXP4010/03P/3540](#) [PXP4010/03P/3035](#) [PXP4011/08S/6570](#)
[PXP4010/12S/6065](#) [PXP4013/08P/PC](#) [PXP4011/03P/5560](#) [PXP4011/08P/4550](#) [PXP4010/03S/5560](#)
[PXP4010/12S/3035](#) [PXP4011/03S/5560](#) [PXP4011/12P/4045](#) [PXP4010/12P/5560](#) [PXP4011/03P/6570](#)
[PXP4011/12S/6065](#) [PXP4013/03P/PC](#) [PXP4013/12P](#) [PXP4089/WH](#) [PXP4010/12S/5560](#) [PXP4010/08S/6065](#)