

Features

Switching Regulator

- Efficiency up to 93%, no need for heatsinks
- High voltage input range, up to 50V
- Short Circuit Protection, Thermal Shutdown
- All-in-one solution, no external components required
- IEC/EN60950-1 + AM:2 Certified

Description

The R-78HBxx/W-Series high efficiency, high input voltage switching regulators are ideally suited to replace 78xx linear regulators. The efficiency of up to 93% means that very little energy is wasted as heat so there is no need for any heat sinks with their additional space and mounting costs. A wide input voltage range allows the full stored energy utilization of standard 12, 24 and 36V batteries as well as COB LED drivers. No external components are required to make a complete regulated, short-circuit protected supply. A built-in protection diode allows high capacitive loads. Typical applications include Auxiliary fan CV power supplies powered from CC LED drivers, industrial, aerospace and battery powered applications.

Selection Guide

| Part Number | Input Voltage Range ⁽²⁾ [VDC] | Output Voltage [VDC] | Output Current [A] | Efficiency typ @ min Vin. [%] | Max. Capacitive Load ⁽¹⁾ [μF] |
|-----------------|--|----------------------|--------------------|-------------------------------|--|
| R-78HB5.0-0.5/W | 9-72 | 5.0 | 0.5 | 86 | 100/6800 |
| R-78HB12-0.5/W | 17-72 | 12 | 0.5 | 93 | 100/6800 |

Notes:


Note1: with normal start-up time an no external components = 100μF
with <1S start-up time = 6800μF

Specifications (measured @ ta= 25°C, full load, nominal input voltage and after warm-up)

BASIC CHARACTERISTICS

| Parameter | Condition | Min. | Typ. | Max. |
|------------------------------------|-----------------------|---------------------|----------------|----------------|
| Input Voltage Range ⁽²⁾ | 5Vout 12Vout | 9VDC 17VDC | 48VDC 48VDC | 72VDC 72VDC |
| Short Circuit Input Current | | | 15mA | 25mA |
| Quiescent Current | Vin = 48VDC, 10% load | 1mA | | 5mA |
| Internal Power Dissipation | | | 0.65W | |
| Internal Operating Frequency | full load | 120kHz | | 800kHz |
| Efficiency | | see Selection Guide | | |
| Minimum Load ⁽³⁾ | | 10mA | | |
| Output Ripple and Noise | | | 20mVp-p | 60mVp-p |

Typical Application Circuit

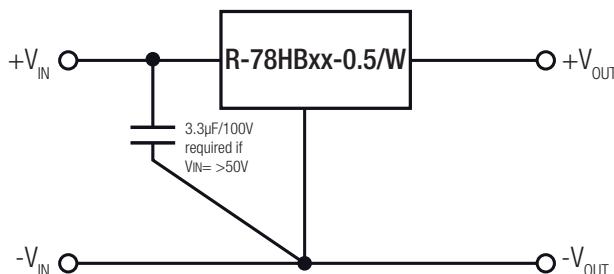

Notes:

Note2: The converter has built in soft start circuit. Rapidly changing the input voltage from V_{IN}_{min} to V_{IN}_{max} can bypass this circuit and damage the converter.

Note3: Operation under no load will not damage the devices, however they may not meet all specifications. A minimum load of 10mA is recommended.

continued on next page

RECOM
DC/DC Converter

R-78HB/W

0.5 AMP
SIP3 Wired
Single Output




IEC60950-1 Certified
EN60950-1 Certified
EN55022 Certified


Specifications (measured @ $ta = 25^\circ\text{C}$, full load, nominal input voltage and after warm-up)

Efficiency vs. Load

R-78HB5.0-0.5/W

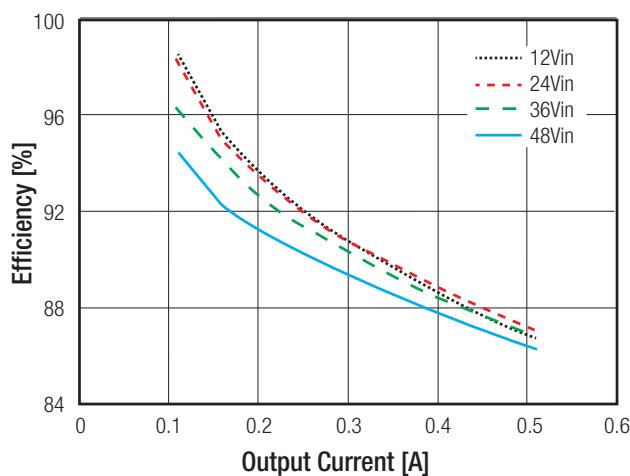

R-78HB12-0.5/W

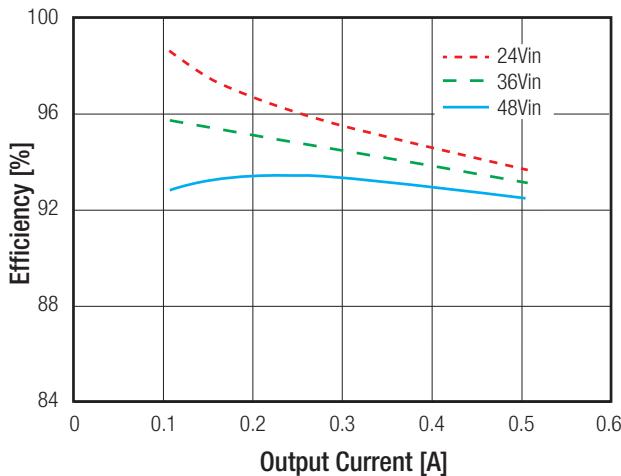


REGULATIONS

| Parameter | Condition | Value |
|-------------------------|---|--|
| Output Voltage Accuracy | 100% load | $\pm 2\%$ typ. / $\pm 3\%$ max. |
| Line Voltage Regulation | V_{in} = min. to max., full load | 0.4% typ. / 1% max. |
| Load Voltage Regulation | 10% to 100% load | 0.3% typ. / 0.6% max. |
| Dynamic Load Stability | with $100\mu\text{F}$ output Capacitor, 100% \leftrightarrow 50% load | $\pm 75\text{mV}$ typ. / $\pm 100\text{mV}$ max. |

PROTECTIONS

| Parameter | Condition | Value |
|--------------------------------|-----------|--------------------------------|
| Internal Input Filter | | $1\mu\text{F}$ Capacitor |
| Short Circuit Protection (SCP) | | continuous, automatic recovery |

Optional Protection Circuit

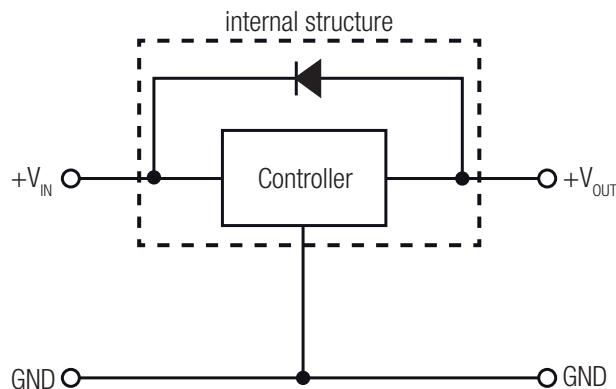

Specifications (measured @ $ta = 25^\circ\text{C}$, full load, nominal input voltage and after warm-up)

| ENVIRONMENTAL | | |
|-----------------------------|--|--|
| Parameter | Condition | Value |
| Operating Temperature Range | with derating (see graph) | -40°C to +85°C |
| Maximum Case Temperature | | +100°C |
| Case Thermal Impedance | | 55°C/W |
| MTBF | MIL-HDBK 217F, +25°C MIL-HDBK 217F, +71°C | 7395 x 10 ³ hours 1242 x 10 ³ hours |

Derating Graph

The graph plots Output Power [%] on the y-axis (0 to 100) against Ambient Temperature [°C] on the x-axis (-40 to 100). A solid line represents the power output, which is constant at 100% until an ambient temperature of 60°C. At 71°C, the power begins to drop linearly to 60% at 80°C. A dashed vertical line is drawn at 71°C to indicate the start of derating.



| SAFETY AND CERTIFICATIONS | | |
|----------------------------|----------------------|------------------------------------|
| Certificate Type | Report / File Number | Standard |
| IEC/EN General Safety | LVD 1603123 | IEC/EN-60950-1, 2nd Edition + AM:2 |
| EMI Compliance | Condition | Standard / Criterion |
| EMC Conducted and Radiated | | EN55022, Class B |
| ESD | | EN61000-4-2, Criteria A |

| DIMENSION and PHYSICAL CHARACTERISTICS | | |
|--|------|--|
| Parameter | Type | Value |
| Case Material | | non-conductive black plastic (UL94V-0) |
| Potting Material | | epoxy (UL94V-0) |
| Package Dimension (LxWxH) | | 12.1 x 9.7 x 24.0mm |
| Package Weight | | 4.5g |

continued on next page

Specifications (measured @ $ta = 25^\circ\text{C}$, full load, nominal input voltage and after warm-up)

Dimension Drawing (mm)

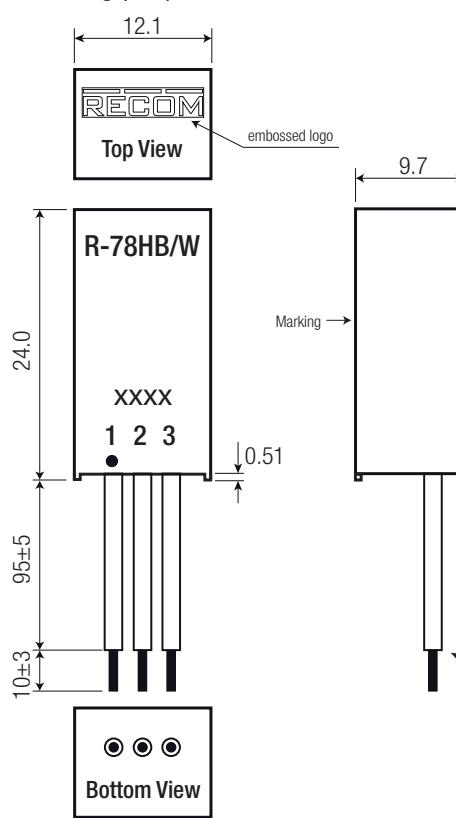


Connection

| Wired Color | Type | Wire Composition | Function |
|-------------|----------------|------------------|----------|
| 1, red | UL-1430, AWG22 | 17/0.16 | +Vin |
| 2, black | UL-1430, AWG22 | 17/0.16 | GND |
| 3, brown | UL-1430, AWG22 | 17/0.16 | +Vout |


Tolerance: xx.x= $\pm 0.5\text{mm}$
xx.xx= $\pm 0.35\text{mm}$

Wire Composition



APPLICATION

Standard Application

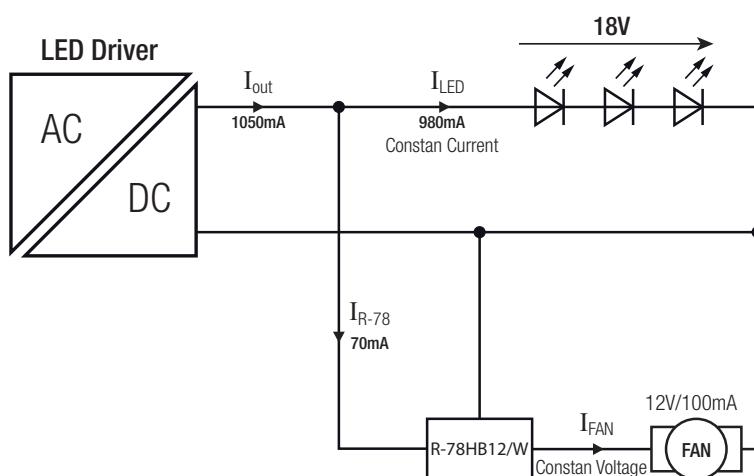

PACKAGING INFORMATION

| | | |
|-----------------------------|----------------|------------------------|
| Packaging Dimension (LxWxH) | cardboard box | 140.0 x 130.0 x 65.0mm |
| Packaging Quantity | | 25pcs |
| Storage Temperature Range | | -55°C to +125°C |
| Storage Humidity | non-condensing | 95%, RH max. |

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[R-78HB5.0-0.5/W](#) [R-78HB12-0.5/W](#)