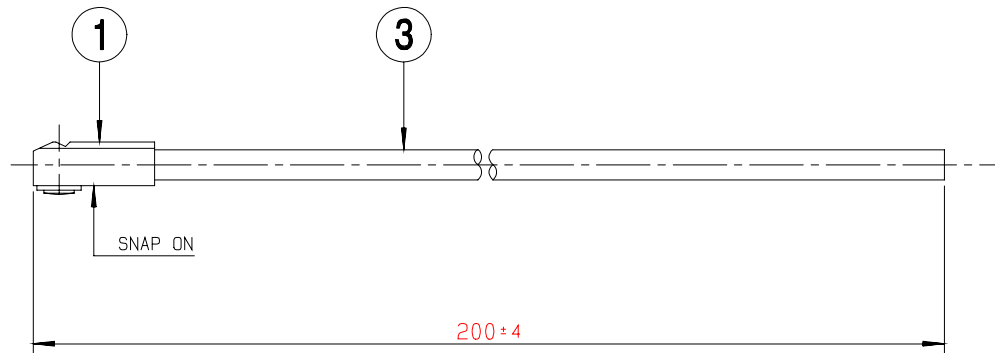


UMP HIGHT 2 RIGHT ANGLE SNAP**R285.020.212****20CM CABLE 1/50 S-TR****Series : CORD-STD****PACKAGING**

Standard	Unit	Other
100	'W' option	Contact us

* 1 * Connector A : **R107.011.000**
 * 2 * Connector B :
 * 3 * Cable : **C291.050.066**
 Type : **CAB 1/55 - 50 VMTX - BLANC**

ELECTRICAL CHARACTERISTICS

Impedance **50 Ω**
 Frequency **0-3 GHz**
 Operating temperature **-40/+90 ° C**
 VSWR **NA + 0.000 x F(GHz) Maxi**
 Insertion loss **NA $\sqrt{F}$ (GHz) dB Maxi**
 Voltage rating **100 V_{eff} Maxi**
 Dielectric withstanding voltage **350 V_{eff} mini**
 Insulation resistance **1000 M Ω mini**

SPECIFICATION

Weight **0.600 g**
 Cable retention **20 N mini**
 Others :

**Edition : 0144 A**

Design changes may be in order to improve the product.