

R591 RADIALL coaxial subminiature switches have a typical operating life exceeding 25 million cycles. Excellent RF & repeatability characteristics along with a guaranteed life of 10 million cycles make these switches ideal for Automated Test Equipment (ATE) and other measurement applications. These miniature switches are also an excellent choice for Mil/Aero applications due to their small size, light weight, as well as outstanding shock and vibration handling capabilities.

PART NUMBER SELECTION

R 591

Updated revision

RF connectors :

3 : SMA up to 6 GHz
7 : SMA up to 26.5 GHz
8 : SMA 2.9 up to 40GHz (5)
E : QMA up to 6 GHz (4)

Type :

0 : Normally open
2 : Latching, global reset
6 : Latching, separated reset (1)

Actuator voltage :

2 : 12 Vdc
3 : 28 Vdc

Actuator Terminal :

0 : Solder pins
5 : Micro-D connector

Options :

0 : Without option
1 : Positive common
2 : Normally open with TTL driver (high level) (2)&(3)
3 : With suppression diodes
4 : With suppression diodes and positive common

Number of positions :

4 : 4 positions
6 : 6 positions

- (1) : Available with "solder pins" models only
(2) : Polarity is not relevant to application for switches with TTL driver
(3) : Suppression diodes are already included with TTL option



(4) : The "QLF" trademark (quick lock formula®) standard applies to QMA and QN series and guarantees the full intermateability between suppliers using this trademark. Using QLF certified connectors also guarantees the specified level of RF performances.

(5) : Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu.



In the continual goal to improve our products, we reserve the right to make any modification judged necessary.

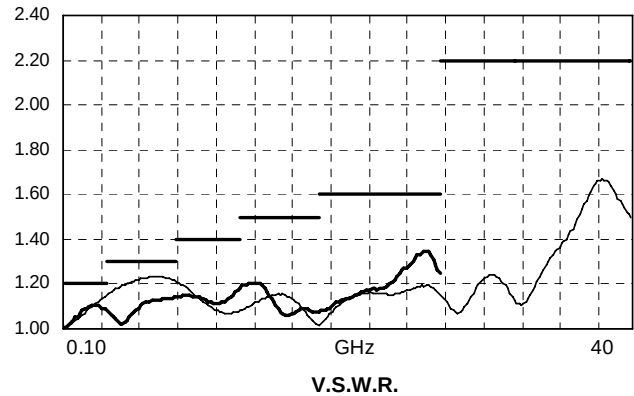
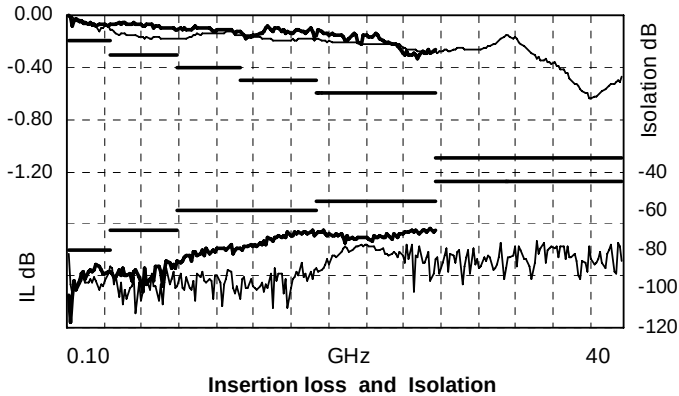
GENERAL SPECIFICATIONS

Operating mode		Normally open		Latching	
Nominal operating voltage (across operating temperature) Vdc		12 (10.2 / 13)	28 (21 / 30)	12 (10.2 / 13)	28 (21 / 30)
Coil resistance (+/-10%) Ohms		48	250	60	285
Operating current at 23°C mA		250	110	200	98
Average power		See Power Rating Chart on general catalog			
TTL input	High Level	2.2 to 5.5 Volts			
	Low Level	0 to 0.8 Volts			
Switching time (max) ms		10			
Life		10 million cycles (SMA, QMA) / 2 million cycles (SMA 2.9)			
Connectors		SMA / QMA / SMA 2.9			
Actuator terminals		Solder Pins : double row connector for wrapping, soldering (250°C max / 30 sec), or connecting to 2.54 mm pitch female connector. 9 pin micro-D receptacle M83513/07-A according to MIL-C-85513.			
Operating temperature range °C		-40 to +85			
Storage temperature range °C		-55 to +85			
Sine vibration (According to MIL STD 202, Method 204D, Cond. D)		10-2000 Hz, 20g	operating		
Random vibration (According to MIL STD 202, Method 214A, Profile I, Cond. F)		50-2000 Hz, 20.71grms	operating		
Shock (According to MIL STD 202, Method 213B, Cond. C)		100g / 6 ms, ½ sine	operating		



RF PERFORMANCES

Connectors	Frequency Range GHz		V.S.W.R. (max)	Insertion Loss (max) dB	Isolation (min) dB	Impedance Ohms
SMA / QMA	DC – 6	DC – 3	1.20	0.20	80	50
		3 – 6	1.30	0.30	70	
SMA	DC – 26.5	DC – 3	1.20	0.20	80	50
		3 – 8	1.30	0.30	70	
		8 – 12.4	1.40	0.40	60	
		12.4 – 18	1.50	0.50	60	
		18 – 26.5	1.60	0.60	55	
SMA2.9	DC – 40	DC – 3	1.20	0.20	80	50
		3 – 8	1.30	0.30	70	
		8 – 12.4	1.40	0.40	60	
		12.4 – 18	1.50	0.50	60	
		18 – 26.5	1.70	0.70	55	
		26.5 – 40	2.20	1.10	45	

In the continual goal to improve our products, we reserve the right to make any modification judged necessary.

TYPICAL RF PERFORMANCES

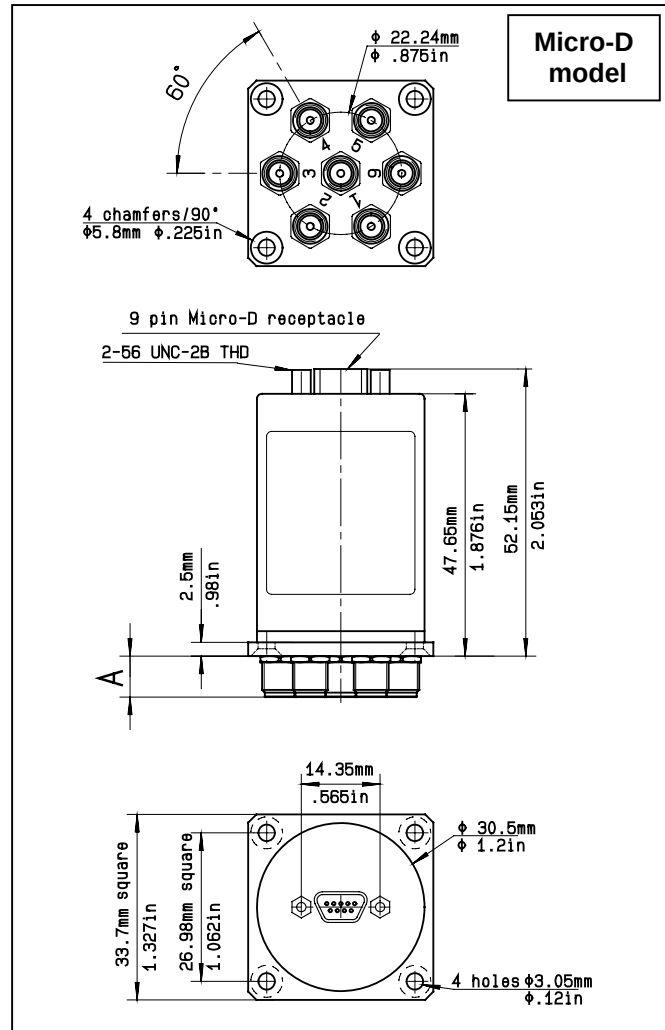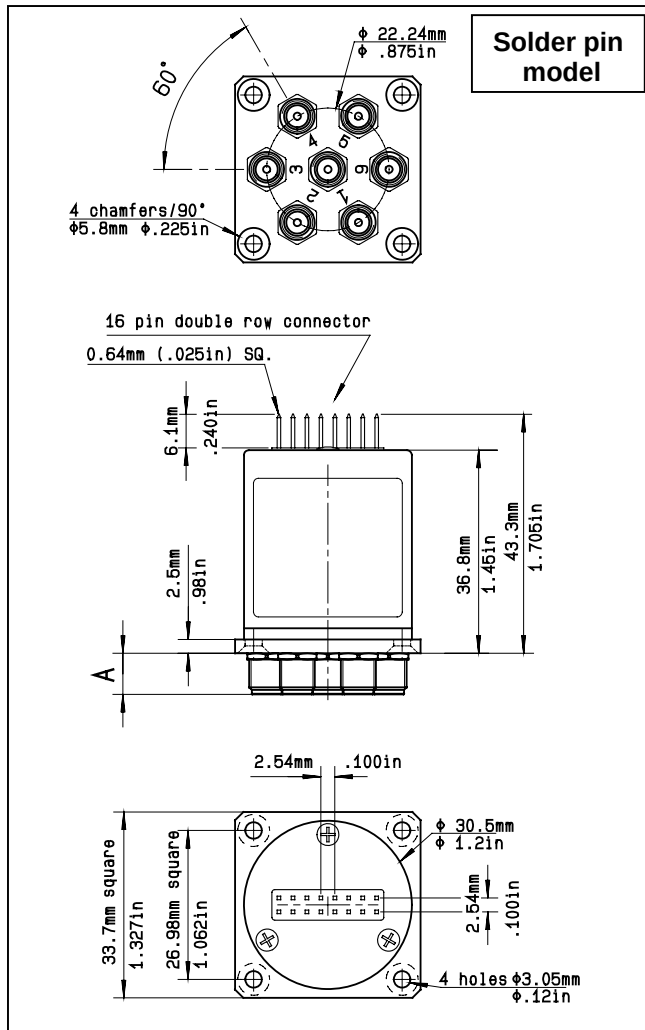TYPICAL OUTLINE DRAWING (1)

Connectors	SMA	SMA 2.9	QMA
A max (mm/ inches)	7.4/ 0.291	6.5/0.26	10.8/ 0.425



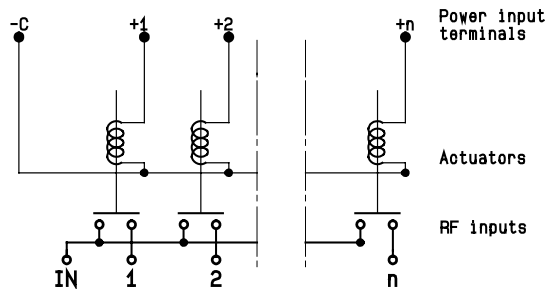
(1) : For SP4T, ways 3 and 6 not connected

all dimensions are in mm/ inches


In the continual goal to improve our products, we reserve the right to make any modification judged necessary.

R591 series electrical schematics


NORMALLY OPEN WITHOUT OPTION
R591 -0- -0-



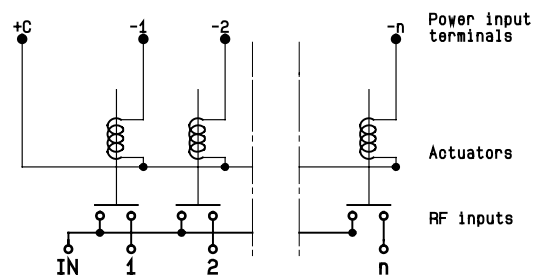
NORMALLY OPEN WITH POSITIVE COMMON
R591 -0- -1-



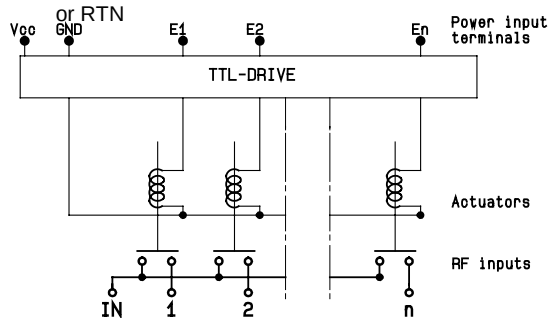
NORMALLY OPEN WITH TTL DRIVE
R591 -0- -2-



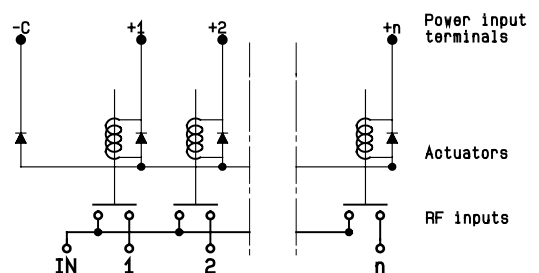
NORMALLY OPEN WITH SUPPRESSION DIODES
R591 -0- -3-








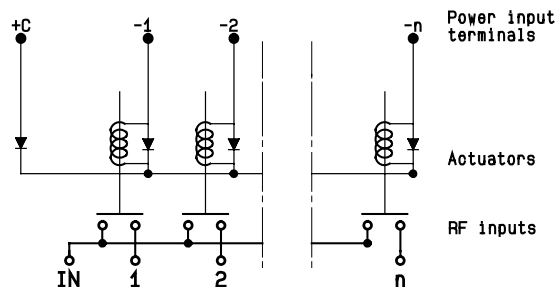
NORMALLY OPEN WITH POSITIVE COMMON AND SUPPRESSION DIODES
R591 -0- -4-



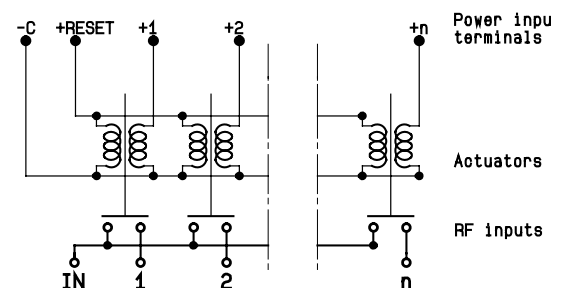LATCHING GLOBAL RESET WITHOUT OPTION
R591 -2- -0-



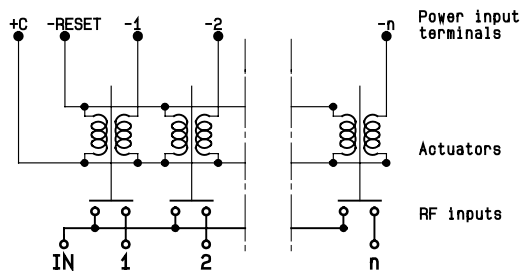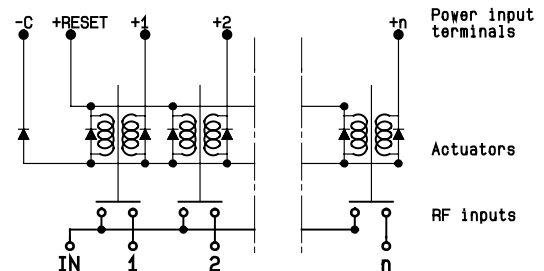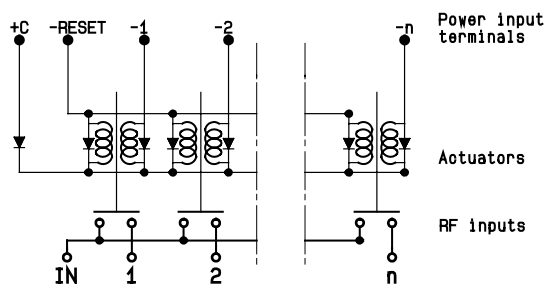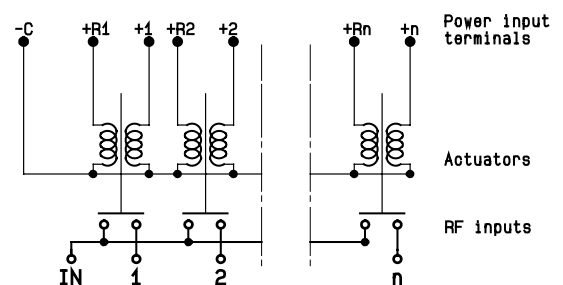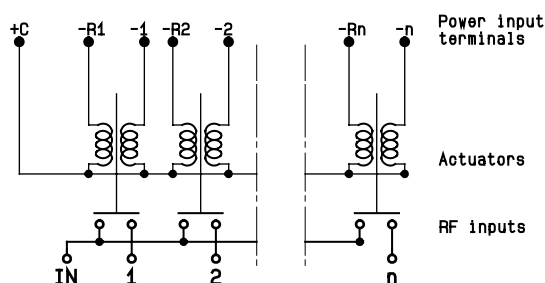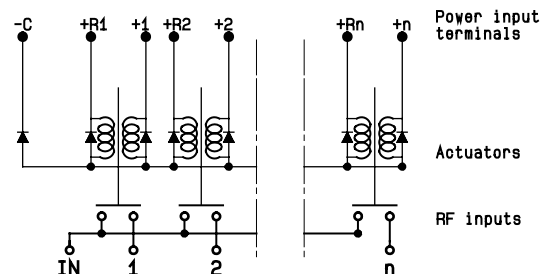
In the continual goal to improve our products, we reserve the right to make any modification judged necessary.

R591 series electrical schematics
**LATCHING GLOBAL RESET WITH POSITIVE COMMON
R591 -2- -1-**

**LATCHING GLOBAL RESET WITH SUPPRESSION DIODES
R591 -2- -3-**

**LATCHING GLOBAL RESET WITH POSITIVE COMMON AND
SUPPRESSION DIODES
R591 -2- -4-**

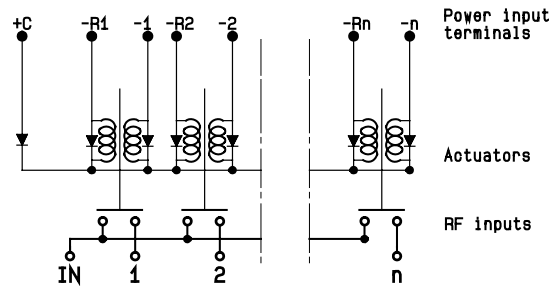**LATCHING SEPARATED RESET WITHOUT OPTION
R591 -6- -0-**

**LATCHING SEPARATED RESET WITH POSITIVE COMMON
R591 -6- -1-**

**LATCHING SEPARATED RESET WITH SUPPRESSION
DIODES
R591 -6- -3-**


In the continual goal to improve our products, we reserve the right to make any modification judged necessary.


R591 series electrical schematics

LATCHING SEPARATED RESET WITH POSITIVE COMMON AND SUPPRESSION DIODES R591 -6- -4-




Pin identification

Solder pins (top view)*



9 pin Micro-D (top view)



- NC : not connected
- For SP4T, ways 3 and 6 not connected
- Pin R = reset of all paths

* : compatible with 2.54 mm pitch double row 16 contact femelle connector

		PIN														
Type		C	V	1	2	3	4	5	6	R	R1	R2	R3	R4	R5	R6
Normally open	negative common	-C	NC	+1	+2	+3	+4	+5	+6	NC	NC	NC	NC	NC	NC	NC
	positive common	+C	NC	-1	-2	-3	-4	-5	-6	NC	NC	NC	NC	NC	NC	NC
Latching	negative common	-C	NC	+1	+2	+3	+4	+5	+6	+reset	NC	NC	NC	NC	NC	NC
global reset	positive common	+C	NC	-1	-2	-3	-4	-5	-6	-reset	NC	NC	NC	NC	NC	NC
Latching	negative common	-C	NC	+1	+2	+3	+4	+5	+6	NC	+res.1	+res.2	+res.3	+res.4	+res.5	+res.6
individual reset	positive common	+C	NC	-1	-2	-3	-4	-5	-6	NC	-res.1	-res.2	-res.3	-res.4	-res.5	-res.6
Normally open with TTL drive		Gnd or RTN	Vcc	E1	E2	E3	E4	E5	E6	NC	NC	NC	NC	NC	NC	NC

In the continual goal to improve our products, we reserve the right to make any modification judged necessary.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

R591302640	R591302420	R591702425	R591702600	R591723600	R591703600	R591722605	R591703420
R591322400	R591302600	R591762610	R591703630	R591702605	R591323400	R591702620	R591702400
R591302620	R591362440	R591302605	R591302425	R591303405	R591763400	R591722400	R591702625
R591302610	R591303610	R591763600	R591702610	R591703620	R591702640	R591302400	R591303620
R591302615	R591323405	R591303440	R591302625	R591702440	R591723605	R591703615	R591303410
R591302645	R591302410	R591703410	R591302445	R591722440	R591702405	R591302630	R591802620
R591303640	R591303425	R591303400	R591322645	R591323430	R591722640	R591703425	R591702445
R591322600	R591702420	R591722600	R591723445	R591762600			